



solid-state time-delayed front-side auxiliary switch Time range 0.05...1 s, 24 V AC/DC, 1 NO contact, 1 NC contact ON delay, for 3RT1

product brand name	SIRIUS
product designation	auxiliary switch
design of the product	slow-operating
product type designation	3RT19
General technical data	
size of contactor can be combined company-specific	S0 ... S12
product component semi-conductor output	No
product extension required remote control	No
product extension optional remote control	No
insulation voltage for overvoltage category III according to IEC 60664 with degree of pollution 3 rated value	300 V
degree of pollution	3
surge voltage resistance rated value	4 000 V
shock resistance according to IEC 60068-2-27	11g / 15 ms
vibration resistance according to IEC 60068-2-6	10 ... 55 Hz: 0.35 mm
mechanical service life (switching cycles) typical	10 000 000
electrical endurance (switching cycles) at AC-15 at 230 V typical	50 000
adjustable time	0.05 ... 1 s
relative setting accuracy relating to full-scale value	15 %
recovery time	150 ms
reference code according to IEC 81346-2	K
relative repeat accuracy	1 %
Substance Prohibitance (Date)	07/01/2006
Product Function	
product function star-delta circuit	No
Control circuit/ Control	
type of voltage of the control supply voltage	AC/DC
control supply voltage 1 at AC	
• at 50 Hz rated value	24 V
• at 60 Hz rated value	24 V
control supply voltage frequency 1	50 ... 60 Hz
control supply voltage 1	
• at DC rated value	24 V
operating range factor control supply voltage rated value at DC	
• initial value	0.85
• full-scale value	1.1
operating range factor control supply voltage rated value at AC at 50 Hz	
• initial value	0.85
• full-scale value	1.1

**operating range factor control supply voltage rated value at AC at 60 Hz**

- |                    |      |
|--------------------|------|
| • initial value    | 0.85 |
| • full-scale value | 1.1  |

**Switching Function****switching function**

- |  |     |
|--|-----|
| • ON-delay                                   | Yes |
| • ON-delay/instantaneous contact             | No  |
| • passing make contact                       | No  |
| • passing make contact/instantaneous contact | No  |
| • OFF delay                                  | No  |

**switching function**

- |  |    |
|--|----|
| • flashing symmetrically with interval start/instantaneous | No |
| • flashing symmetrically with interval start               | No |
| • flashing symmetrically with pulse start/instantaneous    | No |
| • flashing symmetrically with pulse start                  | No |
| • flashing asymmetrically with interval start              | No |
| • flashing asymmetrically with pulse start                 | No |

**switching function**

- |  |    |
|--|----|
| • constant clock cycle with pulse start    | No |
| • constant clock cycle with interval start | No |

**switching function**

- |  |    |
|--|----|
| • variably clocked with pulse start    | No |
| • variably clocked with interval start | No |

**switching function**

- |                                      |    |
|--------------------------------------|----|
| • star-delta circuit with delay time | No |
| • star-delta circuit                 | No |

**switching function with control signal**

- |  |    |
|--|----|
| • additive ON-delay                          | No |
| • passing break contact                      | No |
| • passing break contact/instantaneous        | No |
| • OFF delay                                  | No |
| • OFF delay/instantaneous                    | No |
| • pulse delayed                              | No |
| • pulse delayed/instantaneous                | No |
| • pulse-shaping                              | No |
| • pulse-shaping/instantaneous                | No |
| • additive ON-delay/instantaneous            | No |
| • ON-delay/OFF-delay                         | No |
| • ON-delay/OFF-delay/instantaneous           | No |
| • passing make contact                       | No |
| • passing make contact/instantaneous contact | No |

**switching function of interval relay with control signal**

- |  |    |
|--|----|
| • retrotriggerable with deactivated control signal/instantaneous contact | No |
| • retrotriggerable with switched-on control signal                       | No |
| • retrotriggerable with switched-on control signal/instantaneous contact | No |
| • retriggerable with deactivated control signal                          | No |

**design of the control terminal non-floating**

No

**Short-circuit protection**

design of the fuse link for short-circuit protection of the auxiliary switch required

fuse gL/gG: 4 A

**Auxiliary circuit****number of NC contacts**

- |                         |   |
|-------------------------|---|
| • delayed switching     | 1 |
| • instantaneous contact | 0 |

**number of NO contacts**

- |                         |   |
|-------------------------|---|
| • delayed switching     | 1 |
| • instantaneous contact | 0 |

**number of CO contacts**

- |                     |   |
|---------------------|---|
| • delayed switching | 0 |
|---------------------|---|

<ul style="list-style-type: none"> <li>instantaneous contact</li> </ul>	0
<b>operational current of auxiliary contacts at AC-15</b>	
<ul style="list-style-type: none"> <li>maximum</li> </ul>	3 A
<b>operational current of auxiliary contacts as NC contact at AC-15</b>	
<ul style="list-style-type: none"> <li>at 24 V</li> </ul>	3 A
<ul style="list-style-type: none"> <li>at 250 V</li> </ul>	3 A
<b>operational current of auxiliary contacts as NO contact at AC-15</b>	
<ul style="list-style-type: none"> <li>at 24 V</li> </ul>	3 A
<ul style="list-style-type: none"> <li>at 250 V</li> </ul>	3 A
<b>operational current of auxiliary contacts at DC-13</b>	
<ul style="list-style-type: none"> <li>at 24 V</li> </ul>	1 A
<ul style="list-style-type: none"> <li>at 125 V</li> </ul>	0.2 A
<ul style="list-style-type: none"> <li>at 250 V</li> </ul>	0.1 A
<b>Inputs/ Outputs</b>	
<b>product function</b>	
<ul style="list-style-type: none"> <li>at the relay outputs switchover delayed/without delay</li> </ul>	No
<ul style="list-style-type: none"> <li>non-volatile</li> </ul>	No
<b>Electromagnetic compatibility</b>	
EMC immunity according to IEC 61812-1	EN 61000-6-2
<b>conducted interference</b>	
<ul style="list-style-type: none"> <li>due to burst according to IEC 61000-4-4</li> </ul>	2 kV network connection / 1 kV control connection
<ul style="list-style-type: none"> <li>due to conductor-earth surge according to IEC 61000-4-5</li> </ul>	2 kV
<ul style="list-style-type: none"> <li>due to conductor-conductor surge according to IEC 61000-4-5</li> </ul>	1 kV
<b>field-based interference according to IEC 61000-4-3</b>	10 V/m
<b>electrostatic discharge according to IEC 61000-4-2</b>	4 kV contact discharge / 8 kV air discharge
<b>Safety related data</b>	
<b>protection class IP on the front according to IEC 60529</b>	IP20
<b>type of insulation</b>	Basic insulation
<b>category according to EN 954-1</b>	none
<b>Connections/ Terminals</b>	
<b>product component removable terminal for auxiliary and control circuit</b>	No
type of electrical connection for auxiliary and control circuit	screw-type terminals
<b>type of connectable conductor cross-sections</b>	
<ul style="list-style-type: none"> <li>solid</li> </ul>	1x (0.5 ... 4.0 mm <sup>2</sup> ), 2x (0.5 ... 2.5 mm <sup>2</sup> )
<ul style="list-style-type: none"> <li>finely stranded with core end processing</li> </ul>	1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1.5 mm <sup>2</sup> )
<ul style="list-style-type: none"> <li>at AWG cables solid</li> </ul>	2x (20 ... 14)
<ul style="list-style-type: none"> <li>at AWG cables stranded</li> </ul>	2x (20 ... 14)
<b>connectable conductor cross-section</b>	
<ul style="list-style-type: none"> <li>solid</li> </ul>	0.5 ... 4 m <sup>2</sup>
<ul style="list-style-type: none"> <li>finely stranded with core end processing</li> </ul>	0.5 ... 2.5 m <sup>2</sup>
<b>AWG number as coded connectable conductor cross section</b>	
<ul style="list-style-type: none"> <li>solid</li> </ul>	18 ... 14
<ul style="list-style-type: none"> <li>stranded</li> </ul>	18 ... 14
<b>Installation/ mounting/ dimensions</b>	
<b>mounting position</b>	any
<b>fastening method</b>	clip-on
<b>height</b>	46 mm
<b>width</b>	33 mm
<b>depth</b>	73 mm
<b>required spacing</b>	
<ul style="list-style-type: none"> <li>with side-by-side mounting <ul style="list-style-type: none"> <li>forwards</li> <li>backwards</li> <li>upwards</li> <li>downwards</li> <li>at the side</li> </ul> </li> </ul>	0 m 0 m 0 m 0 m 0 m

- for grounded parts

- forwards
- backwards
- upwards
- at the side
- downwards

0 m  
0 m  
0 m  
0 m  
0 m

- for live parts

- forwards
- backwards
- upwards
- downwards
- at the side

0 m  
0 m  
0 m  
0 m  
0 m

#### Ambient conditions

installation altitude at height above sea level maximum

2 000 m

#### ambient temperature

- during operation
- during storage
- during transport

-25 ... +60 °C  
-40 ... +85 °C  
-40 ... +85 °C

relative humidity during operation

15 ... 95 %

#### Certificates/ approvals

##### General Product Approval

##### EMC



[Confirmation](#)



##### Declaration of Conformity

##### Test Certificates

##### Marine / Shipping



[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)



##### Marine / Shipping

##### other

##### Railway



[Confirmation](#)

[Miscellaneous](#)

[Special Test Certificate](#)

#### Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT1926-2EJ11>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT1926-2EJ11>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)



<https://support.industry.siemens.com/cs/ww/en/ps/3RT1926-2EJ11>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RT1926-2EJ11&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT1926-2EJ11&lang=en)

Characteristic: Derating

<https://support.industry.siemens.com/cs/ww/en/ps/3RT1926-2EJ11/manual>

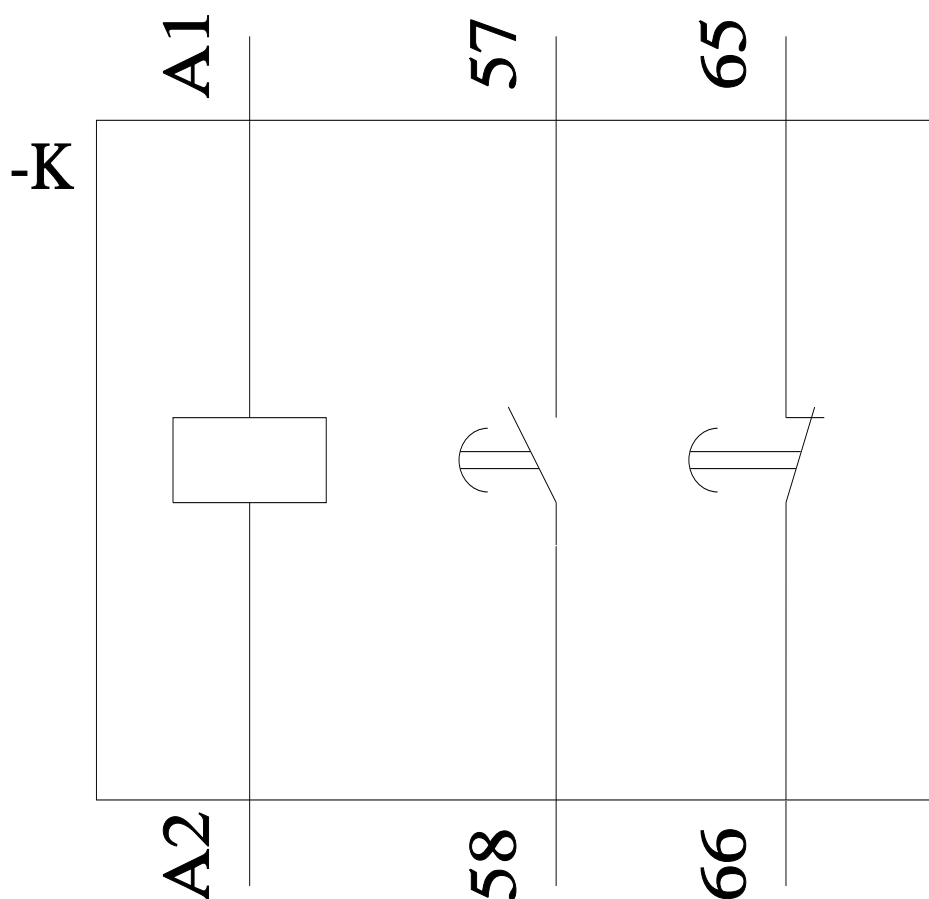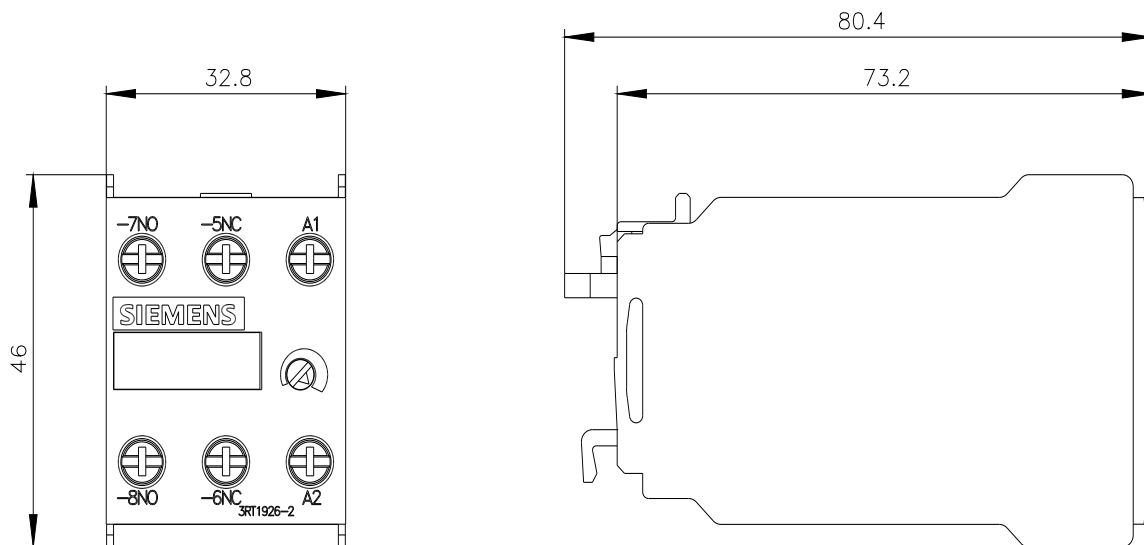

last modified:

12/19/2020

