



Surge suppressor (RC element) for 3RT1 S6, S10, S12 with screw terminal (drive) 48...127 V AC, 70...150 V DC

General technical data					
product brand name		SIRIUS			
product designation		surge suppressor			
design of the surge suppressor		RC element			
ambient temperature					
• during storage	°C	-40 ... +80			
• during operation	°C	-25 ... +60			
Control circuit/ Control					
type of voltage of the control supply voltage		AC/DC			
control supply voltage frequency					
• 1 rated value	Hz	50			
• 2 rated value	Hz	60			
control supply voltage 1					
• at DC	V	70 ... 150			
• at AC					
— at 50 Hz	V	48 ... 127			
— at 60 Hz	V	127 ... 48			
Certificates/ approvals					
certificate of suitability		CE / UL / CSA			
General Product Approval		EMC	Declaration of Conformity		
	Confirmation				
Declaration of Conformity		Test Certificates			
	Special Test Certificate				
other		Railway			
Confirmation		Miscellaneous			
		Special Test Certificate			

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT1956-1CC00>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT1956-1CC00>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT1956-1CC00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT1956-1CC00&lang=en

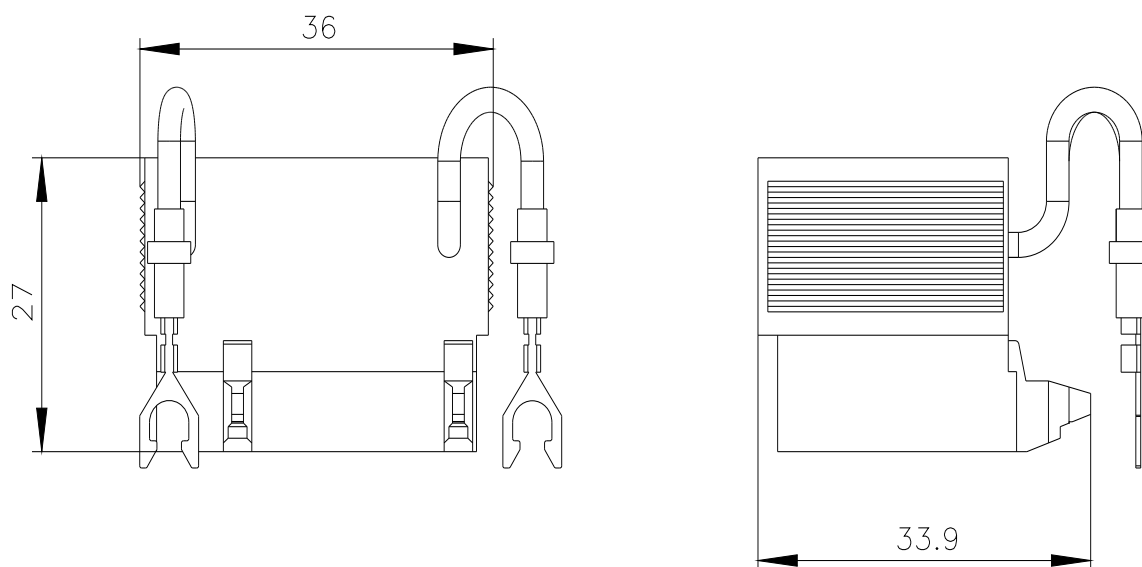

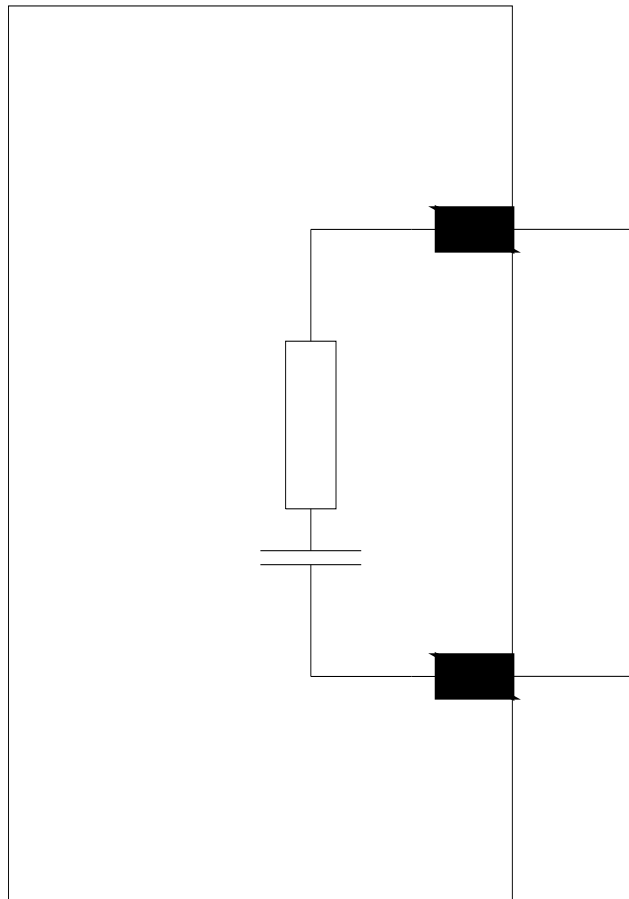

last modified:

10/22/2022 