

terminal cover for busbar connections or on box terminal from 3RT1, 3RB2, 3RW407, 3RW4, 3RW505

product brand name
product designation
design of the product

SIRIUS

Covers for cable lug and busbar connections

Length 100 mm, for complying with the voltage clearances and as touch protection (2 units required per contactor), suitable for S6 and S12 as well as mounted box terminals/can be used for 3UF71.3-1BA00-0, 3RW442. or 3RW443.

Substance Prohibittance (Date)

07/01/2006

Certificates/ approvals

General Product Approval

EMC

Declaration of
Conformity



[Confirmation](#)



Declaration of
Conformity

Test Certificates

Marine / Shipping



[Special Test Certificate](#)



Marine / Shipping

other

Railway



[Confirmation](#)

[Miscellaneous](#)

[Type Test Certificates/Test Report](#)

[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT1956-4EA1>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT1956-4EA1>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT1956-4EA1>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT1956-4EA1&lang=en

Characteristic: Tripping characteristics, I^2t , Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RT1956-4EA1/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT1956-4EA1&objecttype=14&gridview=view1>

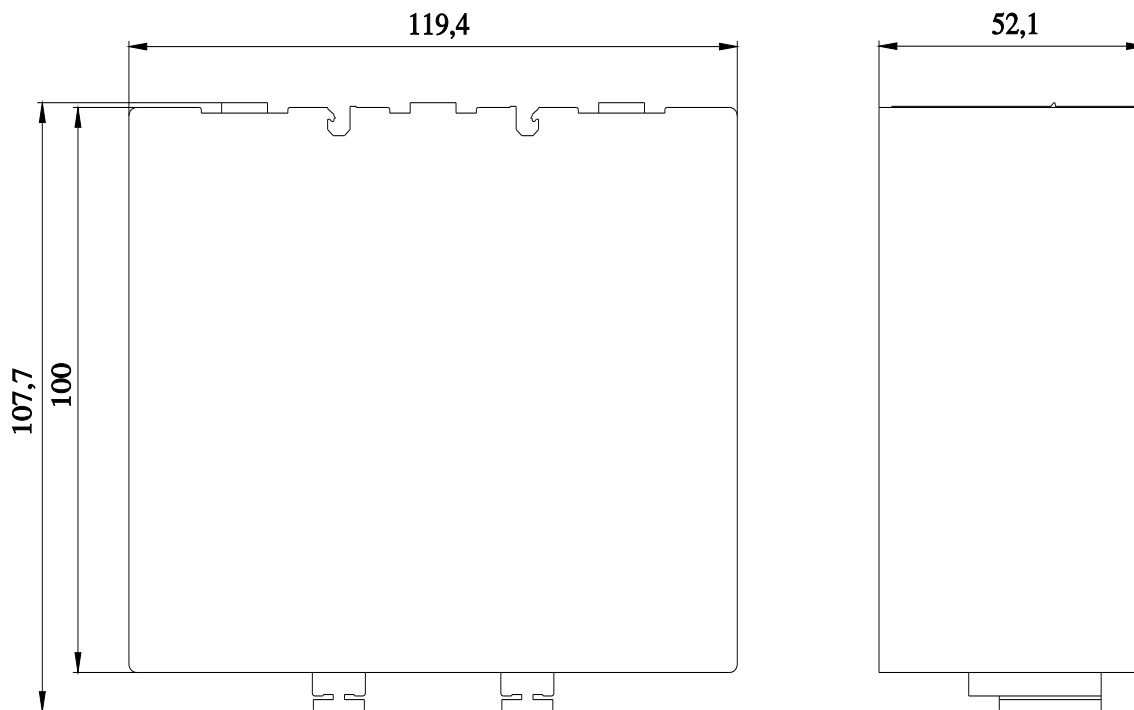

last modified:

12/18/2020 