

CONTACTOR, AC-3, 3KW/400V, 1NC, AC 24V,  
50/60 HZ, 3-POLE, SZ S00 SCREW TERMINAL

### General technical data:

<b>Product brand name</b>		SIRIUS
<b>Product designation</b>		3RT2 contactor
<b>Size of the contactor</b>		S00
<b>Protection class IP / frontal/front side</b>		IP20
<b>Degree of pollution</b>		3
<b>Altitude of installation site / at a height over sea level / maximum</b>	m	2,000
<b>Ambient temperature</b>		
• during storage	°C	-55 ... 80
• during the operating phase	°C	-25 ... 60
• during transport	°C	-55 ... 80
<b>Resistance against shock</b>		9.8g / 5 ms and 5.9g / 10 ms
<b>Impulse voltage resistance / rated value</b>	kV	6
<b>Insulation voltage / rated value</b>	V	690
<b>Resistive loss</b>		
• per conductor / typical	W	0.4
<b>Apparent loss power / of the magnet coil / at AC / typical</b>	V·A	4.2
<b>Item designation</b>		
• according to DIN 40719 extendable after IEC 204-2 / according to IEC 750		K
• according to DIN EN 61346-2		Q
<b>Mechanical operating cycles as operating time</b>		
• of the contactor / typical		30,000,000
• of the contactor with added auxiliary switch block / typical		10,000,000
• of the contactor with added electronics-compatible auxiliary switch block / typical		10,000,000

### Main circuit:

<b>Number of poles / for main current circuit</b>		3
<b>Number of NC contacts / for main contacts</b>		0
<b>Number of NO contacts / for main contacts</b>		3
<b>Operating voltage / at 3 AC / rated value</b>		
• maximum	V	690

<b>Operating current / at AC-1 / at 400 V</b>		
• at 40 °C ambient temperature / rated value	A	18
• at 60 °C ambient temperature / rated value	A	16
<b>Operating current</b>		
• at AC-2 / at 400 V / rated value	A	7
• at AC-3 / at 400 V / rated value	A	7
• at AC-4 / at 400 V / rated value	A	6.5
• with 1 current path / at DC-1		
• at 24 V / rated value	A	15
• at 110 V / rated value	A	1.5
• with 2 current paths in series / at DC-1		
• at 24 V / rated value	A	15
• at 110 V / rated value	A	8.4
• with 3 current paths in series / at DC-1		
• at 24 V / rated value	A	15
• at 110 V / rated value	A	15
• with 1 current path / at DC-3 / at DC-5		
• at 24 V / rated value	A	15
• at 110 V / rated value	A	0.1
• with 2 current paths in series / at DC-3 / at DC-5		
• at 24 V / rated value	A	15
• at 110 V / rated value	A	0.25
• with 3 current paths in series / at DC-3 / at DC-5		
• at 24 V / rated value	A	15
• at 110 V / rated value	A	15
<b>Service power</b>		
• at AC-2 / at 400 V / rated value	kW	3
• at AC-3		
• at 400 V / rated value	kW	3
• at 500 V / rated value	kW	3.5
• at 690 V / rated value	kW	4
• at AC-4 / at 400 V / rated value	kW	3
<b>Operating reactive power / at AC-6b</b>		
• at 230 V / rated value	var	0
• at 400 V / rated value	var	0
• at 690 V / rated value	var	0
<b>Off-load operating frequency</b>		
	1/h	10,000
<b>Switching frequency</b>		
• at AC-1 / according to IEC 60947-6-2 / maximum	1/h	1,000
• at AC-2 / according to IEC 60947-6-2 / maximum	1/h	750

- at AC-3 / according to IEC 60947-6-2 / maximum
- at AC-4 / according to IEC 60947-6-2 / maximum

1/h	750
1/h	250

#### Control circuit:

**Design of activation of the operating mechanism** conventional

**Type of voltage / of the controlled supply voltage** AC

#### control supply voltage frequency

• 1 / rated value	Hz	50
• 2 / rated value	Hz	60

#### Control supply voltage / 1

• at 50 Hz / for AC	V	24
• rated value		
• at 60 Hz / for AC	V	24
• rated value		

#### Operating range factor control supply voltage rated value / of solenoid

• at 50 Hz / for AC	0.8 ... 1.1
• at 60 Hz / for AC	0.85 ... 1.1

#### Apparent pull-in power / of the solenoid / for AC

V·A 27

#### Apparent holding power / of the solenoid / for AC

V·A 4.2

#### Power factor inductive

• at pull-in power of the coil	0.8
• at holding power of the coil	0.25

#### Auxiliary circuit:

**Product extension / auxiliary switch** Yes

**Contact reliability / of the auxiliary contacts** 1 faulty switching per 100 million (17 V, 1 mA)

#### Number of NC contacts / for auxiliary contacts

• instantaneous switching	1
• lagging switching	0

#### Number of NO contacts / for auxiliary contacts

• instantaneous switching	0
• leading switching	0

#### Operating current / of the auxiliary contacts

• at AC-12 / maximum	A	10
• at AC-15		
• at 230 V	A	10
• at 400 V	A	3
• at DC-12		
• at 48 V	A	6
• at 60 V	A	6

- at 110 V
- at 220 V
- at DC-13
  - at 24 V
  - at 48 V
  - at 60 V
  - at 110 V
  - at 220 V

A	3
A	1
A	6
A	2
A	2
A	1
A	0.3

#### Short-circuit:

##### Design of the fuse link

- for short-circuit protection of the auxiliary switch / required
- for short-circuit protection of the main circuit
  - at type of coordination 1 / required
  - at type of coordination 2 / required

fuse gL/gG: 10 A

gL/gG LV HRC 3NA, DIAZED 5SB, NEOZED 5SE: 35 A

gL/gG LV HRC 3NA, DIAZED 5SB, NEOZED 5SE: 20A

#### Installation/mounting/dimensions:

##### built in orientation

vertical

##### Type of fixing/fixation

screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022

##### Type of fixing/fixation / Series installation

Yes

##### Width

mm 45

##### Height

mm 57.5

##### Depth

mm 72

##### distance, to be maintained, to the ranks assembly

- forwards
- backwards
- upwards
- downwards
- sideways

mm 0  
mm 0  
mm 6  
mm 6  
mm 0

##### distance, to be maintained, to earthed part

- forwards
- backwards
- upwards
- downwards
- sideways

mm 6  
mm 0  
mm 6  
mm 6  
mm 6

##### distance, to be maintained, conductive elements

- forwards
- backwards
- upwards

mm 6  
mm 6  
mm 6

- downwards
- sideways

mm	10
mm	6

#### Connections:

##### design of the electrical connection

- for main current circuit
- for auxiliary and control current circuit

screw-type terminals  
screw-type terminals

##### Type of the connectable conductor cross-section

- for main contacts
  - unifilar
  - stranded wire
  - stranded wire
    - with conductor end processing
- at AWG-conductors / for main contacts
- for auxiliary contact
  - solid
  - stranded wire
    - with wire end processing
- for AWG conductors / for auxiliary contacts

2x (0.5 ... 1.5 mm<sup>2</sup>), 2x (0.75 ... 2.5 mm<sup>2</sup>), 2x 4 mm<sup>2</sup>  
2x (0.5 ... 1.5 mm<sup>2</sup>), 2x (0.75 ... 2.5 mm<sup>2</sup>), 2x 4 mm<sup>2</sup>  
  
2x (0.5 ... 1.5 mm<sup>2</sup>), 2x (0.75 ... 2.5 mm<sup>2</sup>)  
2x (20 ... 16), 2x (18 ... 14), 2x 12  
  
2x (0.5 ... 1.5 mm<sup>2</sup>), 2x (0.75 ... 2.5 mm<sup>2</sup>), 2x 4 mm<sup>2</sup>  
  
2x (0.5 ... 1.5 mm<sup>2</sup>), 2x (0.75 ... 2.5 mm<sup>2</sup>)  
2x (20 ... 16), 2x (18 ... 14), 2x 12

#### Certificates/approvals:

##### verification of suitability

CE / UL / CSA / CCC

#### Safety:

##### B10 value / with high demand rate

- according to SN 31920

1,000,000

##### T1 value / for proof test interval or service life

- according to IEC 61508

a

20

##### Proportion of dangerous failures

- with low demand rate / according to SN 31920
- with high demand rate / according to SN 31920

%

75

%

75

##### Failure rate (FIT value) / with low demand rate

- according to SN 31920

FIT

50

##### Protection against electrical shock

finger-safe

#### Further information:

##### Information- and Downloadcenter (Catalogs, Brochures,...)





<http://www.siemens.com/industrial-controls/catalogs>

##### Global Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RT2015-1AB02/all>

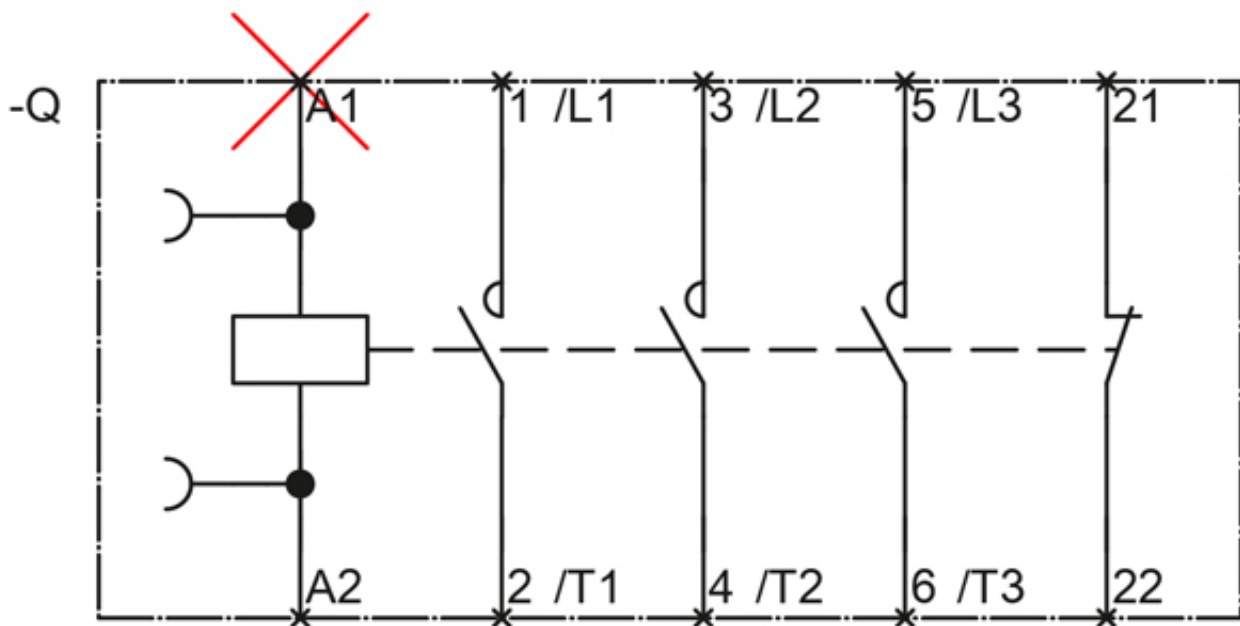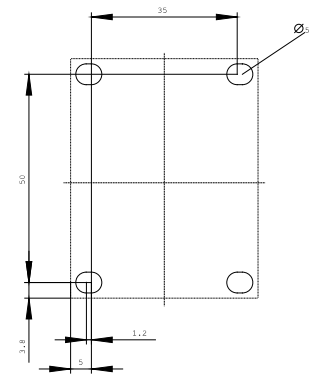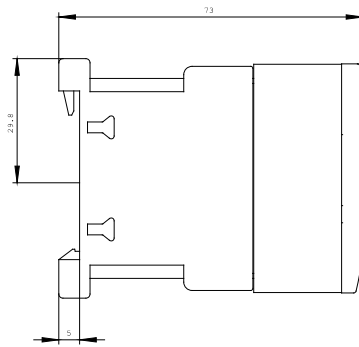

last change:

May 8, 2010