



power contactor, AC-3e/AC-3, 80 A, 37 kW / 400 V, 3-pole, 175-280 V AC/DC, 50/60 Hz, with integrated varistor, auxiliary contacts: 1 NO + 1 NC, main circuit: screw terminal, control and auxiliary circuit: spring-loaded terminal

| | |
|--------------------------|-----------------|
| product brand name | SIRIUS |
| product designation | Power contactor |
| product type designation | 3RT2 |

General technical data

| | |
|---|---------------------------|
| size of contactor | S2 |
| product extension | |
| • function module for communication | No |
| • auxiliary switch | Yes |
| power loss [W] for rated value of the current | |
| • at AC in hot operating state | 17.1 W |
| • at AC in hot operating state per pole | 5.7 W |
| • without load current share typical | 2 W |
| insulation voltage | |
| • of main circuit with degree of pollution 3 rated value | 690 V |
| • of auxiliary circuit with degree of pollution 3 rated value | 690 V |
| surge voltage resistance | |
| • of main circuit rated value | 6 kV |
| • of auxiliary circuit rated value | 6 kV |
| maximum permissible voltage for safe isolation between coil and main contacts according to EN 60947-1 | 400 V |
| shock resistance at rectangular impulse | |
| • at AC | 7.7g / 5 ms, 4.5g / 10 ms |
| • at DC | 7.7g / 5 ms, 4.5g / 10 ms |
| shock resistance with sine pulse | |
| • at AC | 12g / 5 ms, 7g / 10 ms |
| • at DC | 12g / 5 ms, 7g / 10 ms |
| mechanical service life (operating cycles) | |
| • of contactor typical | 10 000 000 |
| • of the contactor with added electronically optimized auxiliary switch block typical | 5 000 000 |
| • of the contactor with added auxiliary switch block typical | 10 000 000 |
| reference code according to IEC 81346-2 | Q |
| Substance Prohibition (Date) | 10/01/2014 |

Ambient conditions

| | |
|--|----------------|
| installation altitude at height above sea level maximum | 2 000 m |
| ambient temperature | |
| • during operation | -25 ... +60 °C |
| • during storage | -55 ... +80 °C |
| relative humidity minimum | 10 % |
| relative humidity at 55 °C according to IEC 60068-2-30 maximum | 95 % |

Main circuit

| | |
|--|--------------------|
| number of poles for main current circuit | 3 |
| number of NO contacts for main contacts | 3 |
| operating voltage | |
| • at AC-3 rated value maximum | 690 V |
| • at AC-3e rated value maximum | 690 V |
| operational current | |
| • at AC-1 at 400 V at ambient temperature 40 °C rated value | 90 A |
| • at AC-1 | |
| — up to 690 V at ambient temperature 40 °C rated value | 90 A |
| — up to 690 V at ambient temperature 60 °C rated value | 80 A |
| • at AC-3 | |
| — at 400 V rated value | 80 A |
| — at 500 V rated value | 80 A |
| — at 690 V rated value | 58 A |
| • at AC-3e | |
| — at 400 V rated value | 80 A |
| — at 500 V rated value | 80 A |
| — at 690 V rated value | 58 A |
| • at AC-4 at 400 V rated value | 55 A |
| • at AC-5a up to 690 V rated value | 79.2 A |
| • at AC-5b up to 400 V rated value | 66.4 A |
| • at AC-6a | |
| — up to 230 V for current peak value n=20 rated value | 70 A |
| — up to 400 V for current peak value n=20 rated value | 70 A |
| — up to 500 V for current peak value n=20 rated value | 70 A |
| — up to 690 V for current peak value n=20 rated value | 58 A |
| • at AC-6a | |
| — up to 230 V for current peak value n=30 rated value | 46.7 A |
| — up to 400 V for current peak value n=30 rated value | 46.7 A |
| — up to 500 V for current peak value n=30 rated value | 46.7 A |
| — up to 690 V for current peak value n=30 rated value | 46.7 A |
| minimum cross-section in main circuit at maximum AC-1 rated value | 35 mm ² |
| operational current for approx. 200000 operating cycles at AC-4 | |
| • at 400 V rated value | 30 A |
| • at 690 V rated value | 24 A |
| operational current | |
| • at 1 current path at DC-1 | |
| — at 24 V rated value | 55 A |
| — at 60 V rated value | 23 A |
| — at 110 V rated value | 4.5 A |
| — at 220 V rated value | 1 A |
| — at 440 V rated value | 0.4 A |
| — at 600 V rated value | 0.25 A |
| • with 2 current paths in series at DC-1 | |
| — at 24 V rated value | 55 A |
| — at 60 V rated value | 45 A |
| — at 110 V rated value | 45 A |
| — at 220 V rated value | 5 A |
| — at 440 V rated value | 1 A |
| — at 600 V rated value | 0.8 A |
| • with 3 current paths in series at DC-1 | |
| — at 24 V rated value | 55 A |

| | |
|---|---|
| — at 60 V rated value | 55 A |
| — at 110 V rated value | 55 A |
| — at 220 V rated value | 45 A |
| — at 440 V rated value | 2.9 A |
| — at 600 V rated value | 1.4 A |
| ● at 1 current path at DC-3 at DC-5 | |
| — at 24 V rated value | 35 A |
| — at 60 V rated value | 6 A |
| — at 220 V rated value | 1 A |
| — at 440 V rated value | 0.1 A |
| — at 600 V rated value | 0.06 A |
| ● with 2 current paths in series at DC-3 at DC-5 | |
| — at 24 V rated value | 55 A |
| — at 60 V rated value | 45 A |
| — at 110 V rated value | 25 A |
| — at 220 V rated value | 5 A |
| — at 440 V rated value | 0.27 A |
| — at 600 V rated value | 0.16 A |
| ● with 3 current paths in series at DC-3 at DC-5 | |
| — at 24 V rated value | 55 A |
| — at 60 V rated value | 55 A |
| — at 110 V rated value | 55 A |
| — at 220 V rated value | 25 A |
| — at 440 V rated value | 0.6 A |
| — at 600 V rated value | 0.35 A |
| operating power | |
| ● at AC-2 at 400 V rated value | 37 kW |
| ● at AC-3 | |
| — at 230 V rated value | 22 kW |
| — at 400 V rated value | 37 kW |
| — at 500 V rated value | 37 kW |
| — at 690 V rated value | 45 kW |
| ● at AC-3e | |
| — at 230 V rated value | 22 kW |
| — at 400 V rated value | 37 kW |
| — at 500 V rated value | 37 kW |
| — at 690 V rated value | 45 kW |
| operating power for approx. 200000 operating cycles at AC-4 | |
| ● at 400 V rated value | 15.8 kW |
| ● at 690 V rated value | 21.8 kW |
| operating apparent power at AC-6a | |
| ● up to 230 V for current peak value n=20 rated value | 27.8 kVA |
| ● up to 400 V for current peak value n=20 rated value | 48.4 kVA |
| ● up to 500 V for current peak value n=20 rated value | 60.6 kVA |
| ● up to 690 V for current peak value n=20 rated value | 69.3 kVA |
| operating apparent power at AC-6a | |
| ● up to 230 V for current peak value n=30 rated value | 18.6 kVA |
| ● up to 400 V for current peak value n=30 rated value | 32.3 kVA |
| ● up to 500 V for current peak value n=30 rated value | 40.4 kVA |
| ● up to 690 V for current peak value n=30 rated value | 55.8 kVA |
| short-time withstand current in cold operating state up to 40 °C | |
| ● limited to 1 s switching at zero current maximum | 1 298 A; Use minimum cross-section acc. to AC-1 rated value |
| ● limited to 5 s switching at zero current maximum | 898 A; Use minimum cross-section acc. to AC-1 rated value |
| ● limited to 10 s switching at zero current maximum | 640 A; Use minimum cross-section acc. to AC-1 rated value |
| ● limited to 30 s switching at zero current maximum | 414 A; Use minimum cross-section acc. to AC-1 rated value |
| ● limited to 60 s switching at zero current maximum | 333 A; Use minimum cross-section acc. to AC-1 rated value |
| no-load switching frequency | |
| ● at AC | 1 500 1/h |
| ● at DC | 1 500 1/h |
| operating frequency | |
| ● at AC-1 maximum | 700 1/h |
| ● at AC-2 maximum | 350 1/h |

| | |
|--------------------|---------|
| • at AC-3 maximum | 500 1/h |
| • at AC-3e maximum | 500 1/h |
| • at AC-4 maximum | 150 1/h |

Control circuit/ Control

| | |
|---|------------------|
| type of voltage of the control supply voltage | AC/DC |
| control supply voltage at AC | |
| • at 50 Hz rated value | 175 ... 280 V |
| • at 60 Hz rated value | 175 ... 280 V |
| control supply voltage at DC | |
| • rated value | 175 ... 280 V |
| operating range factor control supply voltage rated value of magnet coil at DC | |
| • initial value | 0.8 |
| • full-scale value | 1.1 |
| operating range factor control supply voltage rated value of magnet coil at AC | |
| • at 50 Hz | 0.8 ... 1.1 |
| • at 60 Hz | 0.8 ... 1.1 |
| design of the surge suppressor | with varistor |
| inrush current peak | 5 A |
| duration of inrush current peak | 30 µs |
| locked-rotor current mean value | 0.2 A |
| locked-rotor current peak | 0.42 A |
| duration of locked-rotor current | 230 ms |
| holding current mean value | 6 mA |
| apparent pick-up power of magnet coil at AC | |
| • at 50 Hz | 40 VA |
| • at 60 Hz | 40 VA |
| apparent holding power of magnet coil at AC | |
| • at 50 Hz | 2 VA |
| • at 60 Hz | 2 VA |
| closing power of magnet coil at DC | 23 W |
| holding power of magnet coil at DC | 1 W |
| closing delay | |
| • at AC | 35 ... 110 ms |
| • at DC | 35 ... 110 ms |
| opening delay | |
| • at AC | 30 ... 55 ms |
| • at DC | 30 ... 55 ms |
| arcing time | 10 ... 20 ms |
| control version of the switch operating mechanism | Standard A1 - A2 |

Auxiliary circuit

| | |
|--|--------|
| number of NC contacts for auxiliary contacts | 1 |
| instantaneous contact | |
| number of NO contacts for auxiliary contacts | 1 |
| instantaneous contact | |
| operational current at AC-12 maximum | 10 A |
| operational current at AC-15 | |
| • at 230 V rated value | 10 A |
| • at 400 V rated value | 3 A |
| • at 500 V rated value | 2 A |
| • at 690 V rated value | 1 A |
| operational current at DC-12 | |
| • at 24 V rated value | 10 A |
| • at 48 V rated value | 6 A |
| • at 60 V rated value | 6 A |
| • at 110 V rated value | 3 A |
| • at 125 V rated value | 2 A |
| • at 220 V rated value | 1 A |
| • at 600 V rated value | 0.15 A |
| operational current at DC-13 | |
| • at 24 V rated value | 10 A |
| • at 48 V rated value | 2 A |
| • at 60 V rated value | 2 A |

| | |
|---|--|
| <ul style="list-style-type: none"> • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value | 1 A 0.9 A 0.3 A 0.1 A |
| contact reliability of auxiliary contacts | 1 faulty switching per 100 million (17 V, 1 mA) |
| UL/CSA ratings | |
| full-load current (FLA) for 3-phase AC motor | |
| <ul style="list-style-type: none"> • at 480 V rated value • at 600 V rated value | 65 A 62 A |
| yielded mechanical performance [hp] | |
| <ul style="list-style-type: none"> • for single-phase AC motor <ul style="list-style-type: none"> — at 110/120 V rated value — at 230 V rated value • for 3-phase AC motor <ul style="list-style-type: none"> — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value | 5 hp 15 hp 20 hp 25 hp 50 hp 60 hp |
| contact rating of auxiliary contacts according to UL | A600 / P600 |
| Short-circuit protection | |
| design of the fuse link | |
| <ul style="list-style-type: none"> • for short-circuit protection of the main circuit <ul style="list-style-type: none"> — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required | gG: 250 A (690 V, 100 kA), aM: 160 A (690 V, 100 kA), BS88: 200 A (415 V, 80 kA) gG: 160 A (690V,100kA), aM: 80A (690V,100kA), BS88: 125A (415V,80kA) gG: 10 A (500 V, 1 kA) |
| Installation/ mounting/ dimensions | |
| mounting position | +/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface |
| fastening method | screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 |
| <ul style="list-style-type: none"> • side-by-side mounting | Yes |
| height | 114 mm |
| width | 55 mm |
| depth | 130 mm |
| required spacing | |
| <ul style="list-style-type: none"> • with side-by-side mounting <ul style="list-style-type: none"> — forwards — upwards — downwards — at the side • for grounded parts <ul style="list-style-type: none"> — forwards — upwards — at the side — downwards • for live parts <ul style="list-style-type: none"> — forwards — upwards — downwards — at the side | 10 mm 10 mm 10 mm 0 mm 10 mm 10 mm 6 mm 10 mm 10 mm 10 mm 6 mm |
| Connections/ Terminals | |
| type of electrical connection | |
| <ul style="list-style-type: none"> • for main current circuit • for auxiliary and control circuit • at contactor for auxiliary contacts • of magnet coil | screw-type terminals spring-loaded terminals Spring-type terminals Spring-type terminals |
| type of connectable conductor cross-sections for main contacts | |
| <ul style="list-style-type: none"> • solid or stranded • finely stranded with core end processing | 2x (1 ... 35 mm²), 1x (1 ... 50 mm²) 2x (1 ... 25 mm²), 1x (1 ... 35 mm²) |
| connectable conductor cross-section for main | |

contacts

- finely stranded with core end processing

1 ... 35 mm²**connectable conductor cross-section for auxiliary contacts**

- solid or stranded
- finely stranded with core end processing
- finely stranded without core end processing

0.5 ... 2.5 mm²0.5 ... 1.5 mm²0.5 ... 2.5 mm²**type of connectable conductor cross-sections**

- for auxiliary contacts
 - solid or stranded
 - finely stranded with core end processing
 - finely stranded without core end processing
- at AWG cables for auxiliary contacts

2x (0.5 ... 2.5 mm²)2x (0.5 ... 1.5 mm²)2x (0.5 ... 2.5 mm²)

2x (20 ... 14)

AWG number as coded connectable conductor cross section

- for main contacts
- for auxiliary contacts

18 ... 1

20 ... 14

Safety related data**product function**

- mirror contact according to IEC 60947-4-1
- positively driven operation according to IEC 60947-5-1

Yes

No

B10 value with high demand rate according to SN 31920

1 000 000

proportion of dangerous failures

- with low demand rate according to SN 31920
- with high demand rate according to SN 31920

40 %

73 %

failure rate [FIT] with low demand rate according to SN 31920

100 FIT

T1 value for proof test interval or service life according to IEC 61508

20 a

protection class IP on the front according to IEC 60529

IP20

touch protection on the front according to IEC 60529

finger-safe, for vertical contact from the front

suitability for use

- safety-related switching OFF

Yes

Certificates/ approvals**General Product Approval**[Confirmation](#)

CCC



UL

[Miscellaneous](#)[KC](#)**General Product Approval****EMC****Functional Safety/Safety of Machinery****Declaration of Conformity****Test Certificates**

RCM

[Type Examination Certificate](#)

EG-Konf.

[Special Test Certificate](#)**Test Certificates****Marine / Shipping**[Type Test Certificates/Test Report](#)

ABS



BUREAU VERITAS



DNV



LRS



PRS

Marine / Shipping**other****Railway****Dangerous Good**



[Confirmation](#)

[Confirmation](#)

[Vibration and Shock](#)

[Transport Information](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2038-3NP30>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2038-3NP30>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT2038-3NP30>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2038-3NP30&lang=en


Characteristic: Tripping characteristics, I²t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RT2038-3NP30/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2038-3NP30&objecttype=14&gridview=view1>

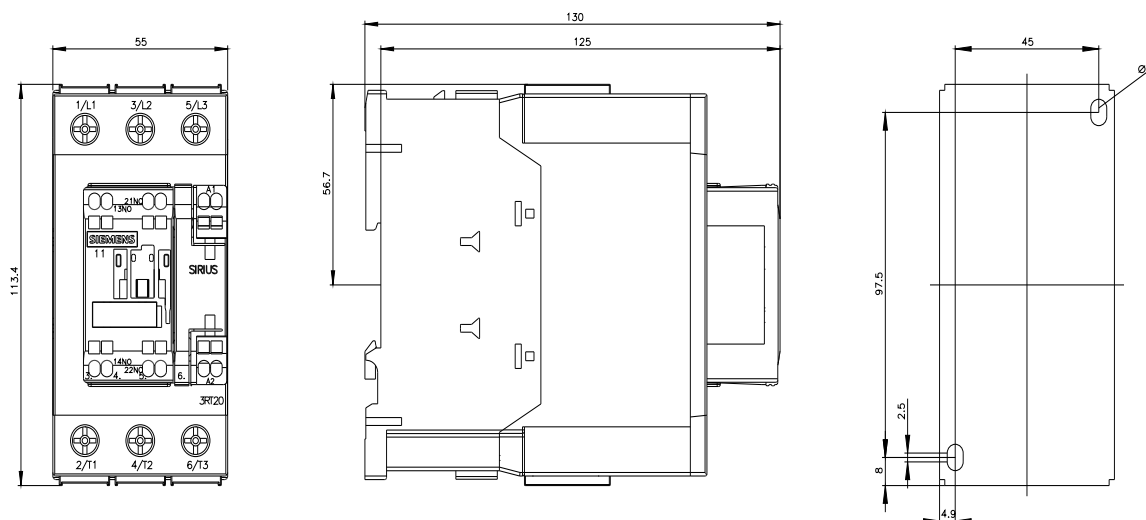

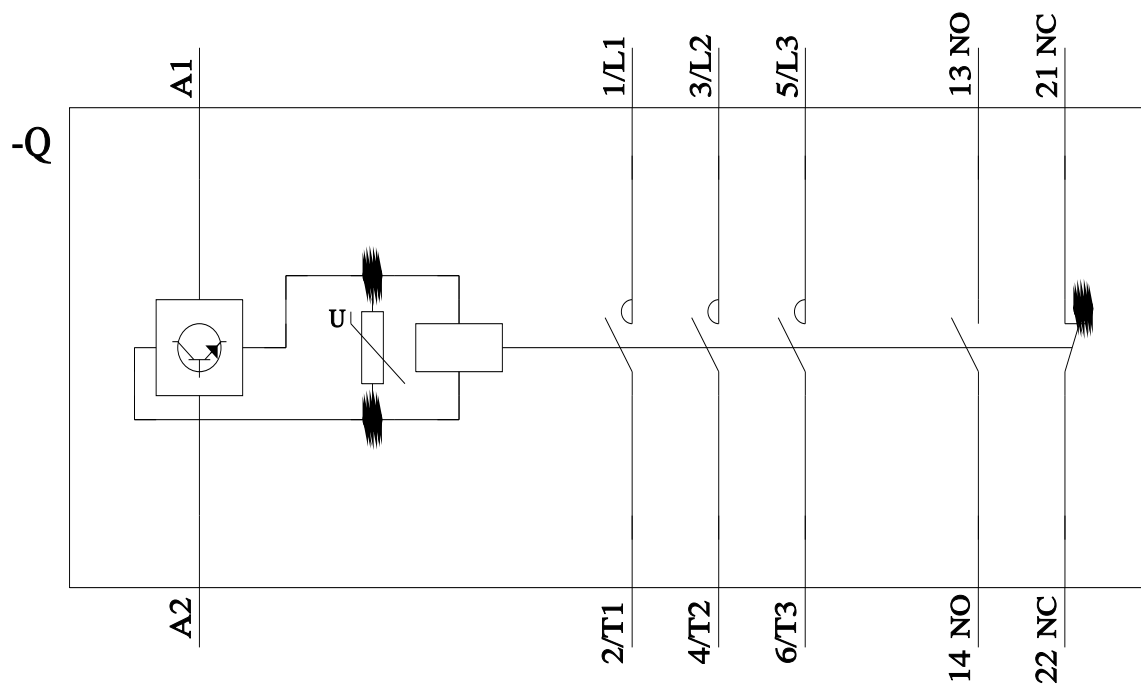

last modified:

2/10/2023 [🔗](#)