



contactor AC-1, 110 A, 400 V / 40 °C, 4-pole, 20-33 V AC/DC, 50/60 Hz, with integrated varistor, auxiliary contacts: 1 NO + 1 NC, screw terminal

product brand name	SIRIUS
product designation	Contactor
product type designation	3RT23

### General technical data

size of contactor	S2
product extension	
• function module for communication	No
• auxiliary switch	Yes
power loss [W] for rated value of the current	
• at AC in hot operating state	38.8 W
• at AC in hot operating state per pole	9.7 W
• without load current share typical	1 W
insulation voltage	
• of main circuit with degree of pollution 3 rated value	690 V
• of the auxiliary and control circuit with degree of pollution 3 rated value	690 V
surge voltage resistance	
• of main circuit rated value	6 kV
• of auxiliary circuit rated value	6 kV
shock resistance at rectangular impulse	
• at AC	7.7g / 5 ms, 4.5g / 10 ms
• at DC	7.7g / 5 ms, 4.5g / 10 ms
shock resistance with sine pulse	
• at AC	12g / 5 ms, 7g / 10 ms
• at DC	12g / 5 ms, 7g / 10 ms
mechanical service life (operating cycles)	
• of contactor typical	10 000 000
• of the contactor with added auxiliary switch block typical	10 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2014

### Ambient conditions

installation altitude at height above sea level maximum	2 000 m
ambient temperature	
• during operation	-40 ... +70 °C
• during storage	-55 ... +80 °C
relative humidity minimum	10 %
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %

### Main circuit

number of poles for main current circuit	4
number of NO contacts for main contacts	4

**operational current**

- at AC-1 at 400 V at ambient temperature 40 °C rated value
- at AC-1
  - up to 690 V at ambient temperature 40 °C rated value
  - up to 690 V at ambient temperature 60 °C rated value
- at AC-3
  - at 400 V rated value

minimum cross-section in main circuit at maximum AC-1 rated value

**short-time withstand current in cold operating state up to 40 °C**

- limited to 1 s switching at zero current maximum
- limited to 5 s switching at zero current maximum
- limited to 10 s switching at zero current maximum
- limited to 30 s switching at zero current maximum
- limited to 60 s switching at zero current maximum

**no-load switching frequency**

- at AC
- at DC

operating frequency at AC-1 maximum

110 A

110 A

95 A

38 A

35 mm<sup>2</sup>

Use minimum cross-section acc. to AC-1 rated value

Use minimum cross-section acc. to AC-1 rated value

Use minimum cross-section acc. to AC-1 rated value

Use minimum cross-section acc. to AC-1 rated value

Use minimum cross-section acc. to AC-1 rated value

1 500 1/h

1 500 1/h

700 1/h

**Control circuit/ Control****type of voltage**

AC/DC

**type of voltage of the control supply voltage**

AC/DC

**control supply voltage at AC**

- at 50 Hz rated value
- at 60 Hz rated value

20 ... 33 V

20 ... 33 V

**control supply voltage at DC**

- rated value

20 ... 33 V

**operating range factor control supply voltage rated value of magnet coil at DC**

- initial value
- full-scale value

0.8

1.1

**operating range factor control supply voltage rated value of magnet coil at AC**

- at 50 Hz
- at 60 Hz

0.8 ... 1.1

0.8 ... 1.1

**design of the surge suppressor**

with varistor

**inrush current peak**

3 A

**duration of inrush current peak**

50 µs

**locked-rotor current mean value**

1 A

**locked-rotor current peak**

2.6 A

**duration of locked-rotor current**

230 ms

**holding current mean value**

40 mA

**apparent pick-up power of magnet coil at AC**

- at 50 Hz
- at 60 Hz

40 VA

40 VA

**apparent holding power of magnet coil at AC**

- at 50 Hz
- at 60 Hz

2 VA

2 VA

**closing power of magnet coil at DC**

23 W

**holding power of magnet coil at DC**

1 W

**closing delay**

- at AC
- at DC

35 ... 110 ms

35 ... 110 ms

**opening delay**

- at AC
- at DC

30 ... 55 ms

30 ... 55 ms

**arcing time**

10 ... 20 ms

**control version of the switch operating mechanism**

Standard A1 - A2

**Auxiliary circuit****number of NC contacts for auxiliary contacts**

1

- attachable

2

<ul style="list-style-type: none"> <li>instantaneous contact</li> </ul>	1
<b>number of NO contacts for auxiliary contacts</b>	1
<ul style="list-style-type: none"> <li>attachable</li> </ul>	2
<ul style="list-style-type: none"> <li>instantaneous contact</li> </ul>	1
operational current at AC-12 maximum	10 A
<b>operational current at AC-15</b>	
<ul style="list-style-type: none"> <li>at 230 V rated value</li> </ul>	10 A
<ul style="list-style-type: none"> <li>at 400 V rated value</li> </ul>	3 A
<ul style="list-style-type: none"> <li>at 500 V rated value</li> </ul>	2 A
<ul style="list-style-type: none"> <li>at 690 V rated value</li> </ul>	1 A
<b>operational current at DC-12</b>	
<ul style="list-style-type: none"> <li>at 24 V rated value</li> </ul>	10 A
<ul style="list-style-type: none"> <li>at 48 V rated value</li> </ul>	6 A
<ul style="list-style-type: none"> <li>at 60 V rated value</li> </ul>	6 A
<ul style="list-style-type: none"> <li>at 110 V rated value</li> </ul>	3 A
<ul style="list-style-type: none"> <li>at 125 V rated value</li> </ul>	2 A
<ul style="list-style-type: none"> <li>at 220 V rated value</li> </ul>	1 A
<ul style="list-style-type: none"> <li>at 600 V rated value</li> </ul>	0.15 A
<b>operational current at DC-13</b>	
<ul style="list-style-type: none"> <li>at 24 V rated value</li> </ul>	10 A
<ul style="list-style-type: none"> <li>at 48 V rated value</li> </ul>	2 A
<ul style="list-style-type: none"> <li>at 110 V rated value</li> </ul>	1 A
<ul style="list-style-type: none"> <li>at 125 V rated value</li> </ul>	0.9 A
<ul style="list-style-type: none"> <li>at 220 V rated value</li> </ul>	0.3 A
<ul style="list-style-type: none"> <li>at 600 V rated value</li> </ul>	0.1 A
design of the miniature circuit breaker for short-circuit protection of the auxiliary switch required	gG: 10 A (230 V, 400 A)
<b>contact reliability of auxiliary contacts</b>	1 faulty switching per 100 million (17 V, 1 mA)
<b>UL/CSA ratings</b>	
<b>contact rating of auxiliary contacts according to UL</b>	A600 / P600
<b>Short-circuit protection</b>	
<b>product function short circuit protection</b>	No
<b>design of the fuse link</b>	
<ul style="list-style-type: none"> <li>for short-circuit protection of the main circuit <ul style="list-style-type: none"> <li>with type of coordination 1 required</li> <li>with type of assignment 2 required</li> </ul> </li> <li>for short-circuit protection of the auxiliary switch required</li> </ul>	gG: 160 A (690 V, 100 kA) gR: 80 A (690 V, 100 kA) gG: 10 A (690 V, 1 kA)
<b>Installation/ mounting/ dimensions</b>	
<b>mounting position</b>	+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface
<b>fastening method</b>	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715
<ul style="list-style-type: none"> <li>side-by-side mounting</li> </ul>	Yes
<b>height</b>	114 mm
<b>width</b>	75 mm
<b>depth</b>	130 mm
<b>required spacing</b>	
<ul style="list-style-type: none"> <li>with side-by-side mounting <ul style="list-style-type: none"> <li>forwards</li> <li>upwards</li> <li>downwards</li> <li>at the side</li> </ul> </li> <li>for grounded parts <ul style="list-style-type: none"> <li>forwards</li> <li>upwards</li> <li>at the side</li> <li>downwards</li> </ul> </li> <li>for live parts <ul style="list-style-type: none"> <li>forwards</li> <li>upwards</li> <li>downwards</li> <li>at the side</li> </ul> </li> </ul>	10 mm 10 mm 10 mm 0 mm  10 mm 10 mm 6 mm 10 mm  10 mm 10 mm 10 mm 6 mm
<b>Connections/ Terminals</b>	

**type of electrical connection**

- for main current circuit
- for auxiliary and control circuit
- at contactor for auxiliary contacts
- of magnet coil

type of connectable conductor cross-sections for main contacts

- solid or stranded
- finely stranded with core end processing

**connectable conductor cross-section for main contacts**

- solid or stranded
- finely stranded with core end processing

**connectable conductor cross-section for auxiliary contacts**

- solid or stranded
- finely stranded with core end processing
- finely stranded without core end processing

**type of connectable conductor cross-sections**

- for auxiliary contacts
  - solid
  - solid or stranded
  - finely stranded with core end processing
- at AWG cables for auxiliary contacts

**AWG number as coded connectable conductor cross section**

- for main contacts
- for auxiliary contacts

screw-type terminals  
screw-type terminals  
Screw-type terminals  
Screw-type terminals

2x (1 ... 35 mm<sup>2</sup>), 1x (1 ... 50 mm<sup>2</sup>)  
2x (1 ... 25 mm<sup>2</sup>), 1x (1 ... 35 mm<sup>2</sup>)

1 ... 50 mm<sup>2</sup>  
1 ... 35 mm<sup>2</sup>

0.5 ... 2.5 mm<sup>2</sup>  
0.5 ... 2.5 mm<sup>2</sup>  
0.5 ... 2.5 mm<sup>2</sup>

2x (0.5 ... 1.5 mm<sup>2</sup>), 2x (0.75 ... 2.5 mm<sup>2</sup>)  
2x (0.5 ... 1.5 mm<sup>2</sup>), 2x (0.75 ... 2.5 mm<sup>2</sup>)  
2x (0.5 ... 1.5 mm<sup>2</sup>), 2x (0.75 ... 2.5 mm<sup>2</sup>)  
2x (20 ... 16), 2x (18 ... 14)

18 ... 1  
20 ... 14

**Safety related data****product function**

- mirror contact according to IEC 60947-4-1
- positively driven operation according to IEC 60947-5-1

T1 value for proof test interval or service life according to IEC 61508

**protection class IP on the front according to IEC 60529****touch protection on the front according to IEC 60529**

Yes  
No  
20 a  
IP20  
finger-safe, for vertical contact from the front

**Communication/ Protocol****product function bus communication**

No

**Certificates/ approvals****General Product Approval**

[Confirmation](#)



[KC](#)



EMC	Functional Safety/Safety of Machinery	Declaration of Conformity	Test Certificates
-----	---------------------------------------	---------------------------	-------------------



[Type Examination Certificate](#)



[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)

**Marine / Shipping**



Marine / Shipping

other

Railway

Dangerous Good



[Confirmation](#)

[Vibration and Shock](#)

[Transport Information](#)

## Further information

### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

### Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2337-1NB30>

### Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2337-1NB30>

### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT2337-1NB30>

### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RT2337-1NB30&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2337-1NB30&lang=en)


### Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RT2337-1NB30/char>

### Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT2337-1NB30&objecttype=14&gridview=view1>

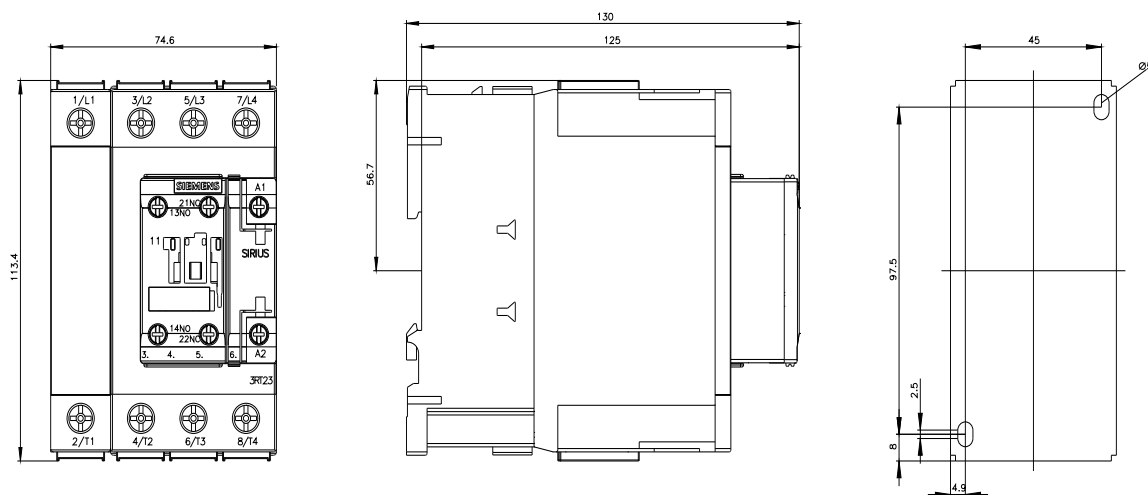

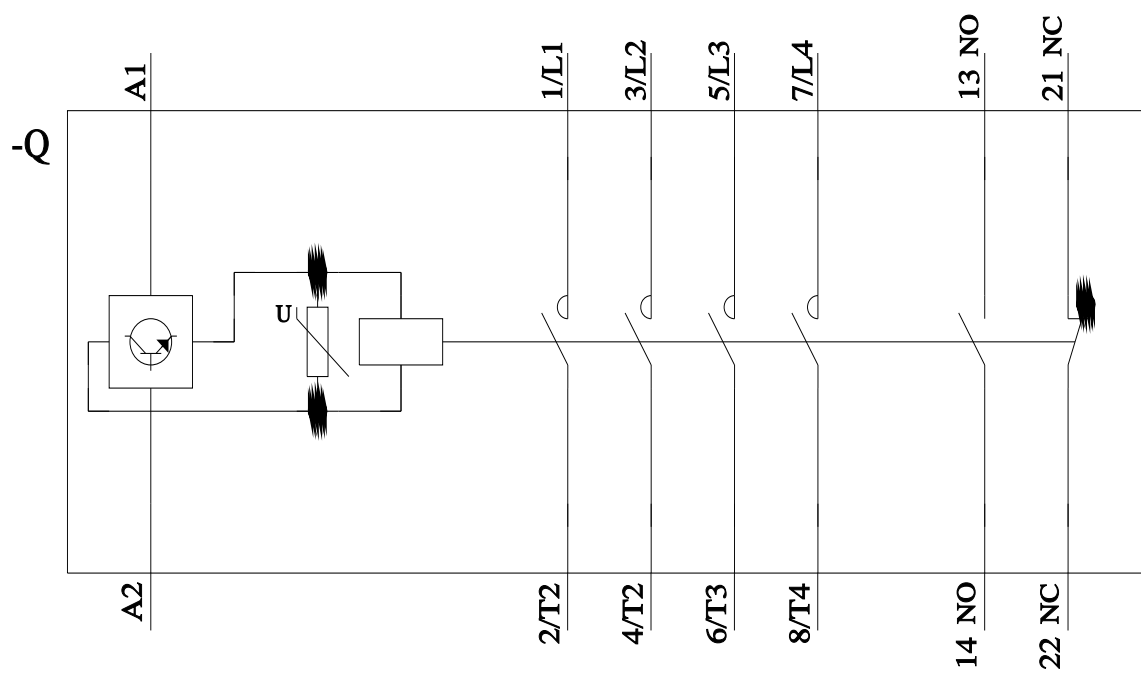

last modified:

11/21/2022