

SURGE SUPPRESSOR, DIODE COMBINATION,  
DC 24 V, FOR MOTOR CONTACTORS SZ S0,

**General technical data:**

<b>Product brand name</b>		SIRIUS
<b>Product designation</b>		surge suppressor
<b>Size of the contactor</b>		S0
<b>Design of the surge suppressor</b>		with diode assemblies
<b>Ambient temperature</b>		
• during storage	°C	-40 ... 80
• during the operating phase	°C	-25 ... 60

**Control circuit:**

<b>Type of voltage / of the controlled supply voltage</b>		DC
<b>control supply voltage frequency</b>		
• 1 / rated value	Hz	0
<b>Control supply voltage / 1</b>		
• for DC		
• rated value	V	24

**Installation/mounting/dimensions:**

<b>built in orientation</b>		any
<b>Type of fixing/fixation</b>		clip-on
<b>Width</b>	mm	30
<b>Height</b>	mm	19
<b>Depth</b>	mm	12

**Certificates/approvals:**

<b>verification of suitability</b>		CE / UL / CSA / CCC
------------------------------------	--	---------------------

**Further information:**

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/industrial-controls/catalogs>

**Global Industry Mall (Online ordering system)**



<http://www.siemens.com/industrial-controls/mall>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<http://support.automation.siemens.com/WWW/view/en/3RT2926-1ER00/all>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3RT2926-1ER00](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RT2926-1ER00)

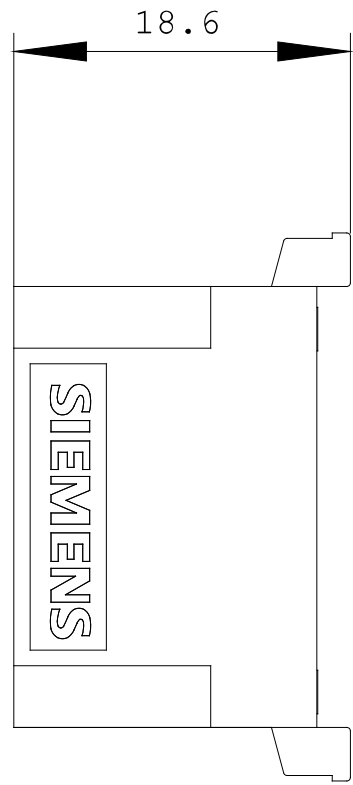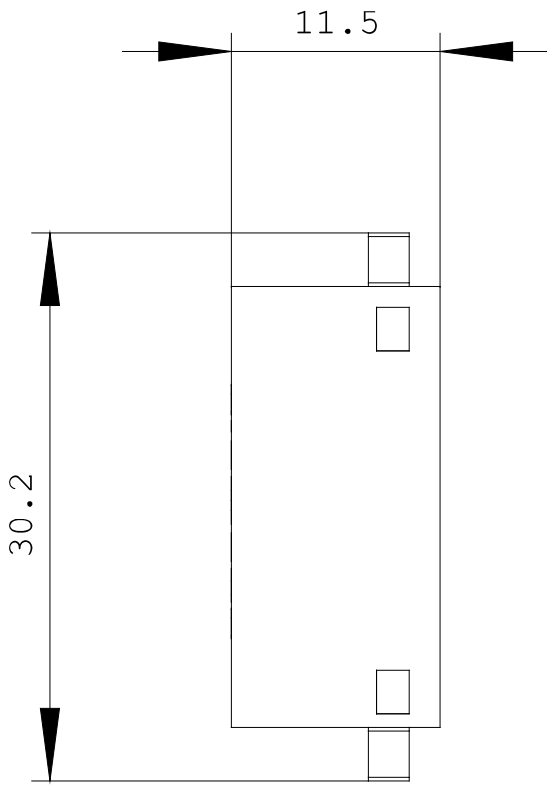

last change:

Apr 26, 2010