



Surge suppressor, Varistor with LED, 127 ... 240 V AC, 70 ... 150 V DC for motor contactors Size S0,

General technical data			
product brand name		SIRIUS	
product designation		surge suppressor	
size of contactor		S0	
design of the surge suppressor		Varistor	
ambient temperature			
• during storage	°C	-40 ... +80	
• during operation	°C	-25 ... +60	
Control circuit/ Control			
type of voltage of the control supply voltage		AC/DC	
control supply voltage frequency			
• 1 rated value	Hz	50	
• 2 rated value	Hz	60	
control supply voltage 1			
• at DC	V	70 ... 150	
• at AC			
— at 50 Hz	V	127 ... 240	
— at 60 Hz	V	240 ... 127	
Installation/ mounting/ dimensions			
mounting position		any	
fastening method		clip-on	
width	mm	30	
height	mm	19	
depth	mm	12	
Certificates/ approvals			
certificate of suitability		CE / UL / CSA	
General Product Approval		EMC	Declaration of Conformity



[Confirmation](#)



Declaration of Conformity	Test Certificates	Marine / Shipping
---------------------------	-------------------	-------------------



[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)



Marine / Shipping

other

Railway



[Environmental Confirmations](#)

[Confirmation](#)



[Vibration and Shock](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2926-1JL00>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2926-1JL00>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT2926-1JL00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2926-1JL00&lang=en

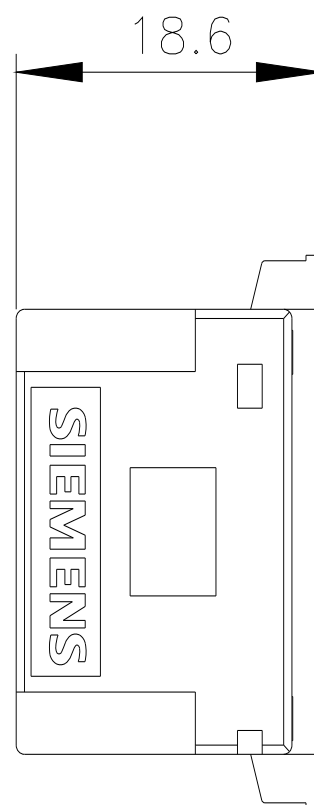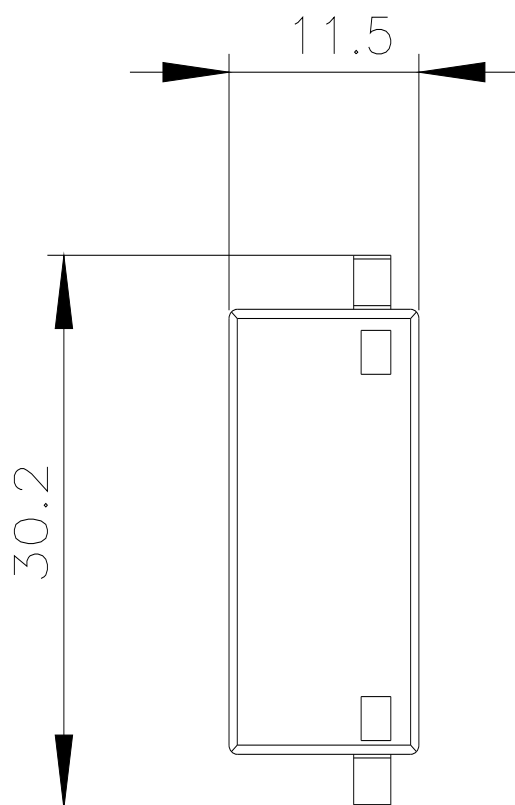

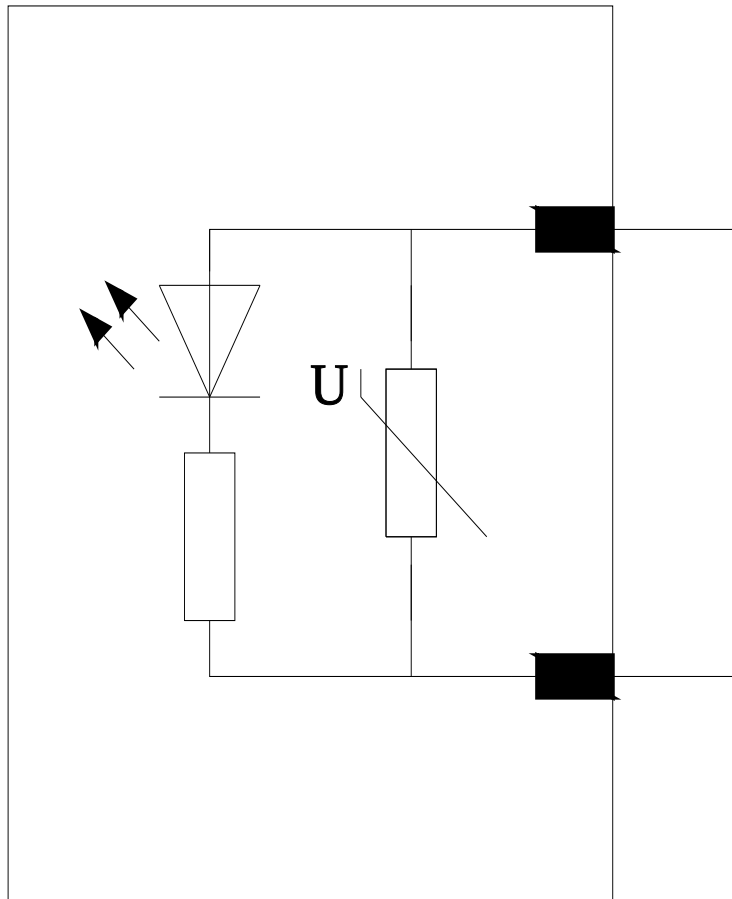

last modified:

10/22/2022 