



Surge suppressor, diode combination with LED, 24 V DC, for motor contactors Size S0,

General technical data

product brand name		SIRIUS
product designation		surge suppressor
size of contactor		S0
design of the surge suppressor		Diode combination
ambient temperature		
• during storage	°C	-40 ... +80
• during operation	°C	-25 ... +60

Control circuit/ Control

type of voltage of the control supply voltage		DC
control supply voltage 1		
• at DC rated value	V	24

Installation/ mounting/ dimensions

mounting position		any
fastening method		clip-on
width	mm	30
height	mm	19
depth	mm	12

Certificates/ approvals

certificate of suitability		CE / UL / CSA
----------------------------	--	---------------

General Product Approval

EMC

Declaration of
Conformity



[Confirmation](#)



Declaration of
Conformity

Test Certificates

Marine / Shipping



[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)



Marine / Shipping

other

Railway



[Environmental Confirmations](#)

[Confirmation](#)



[Vibration and Shock](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2926-1MR00>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2926-1MR00>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT2926-1MR00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2926-1MR00&lang=en

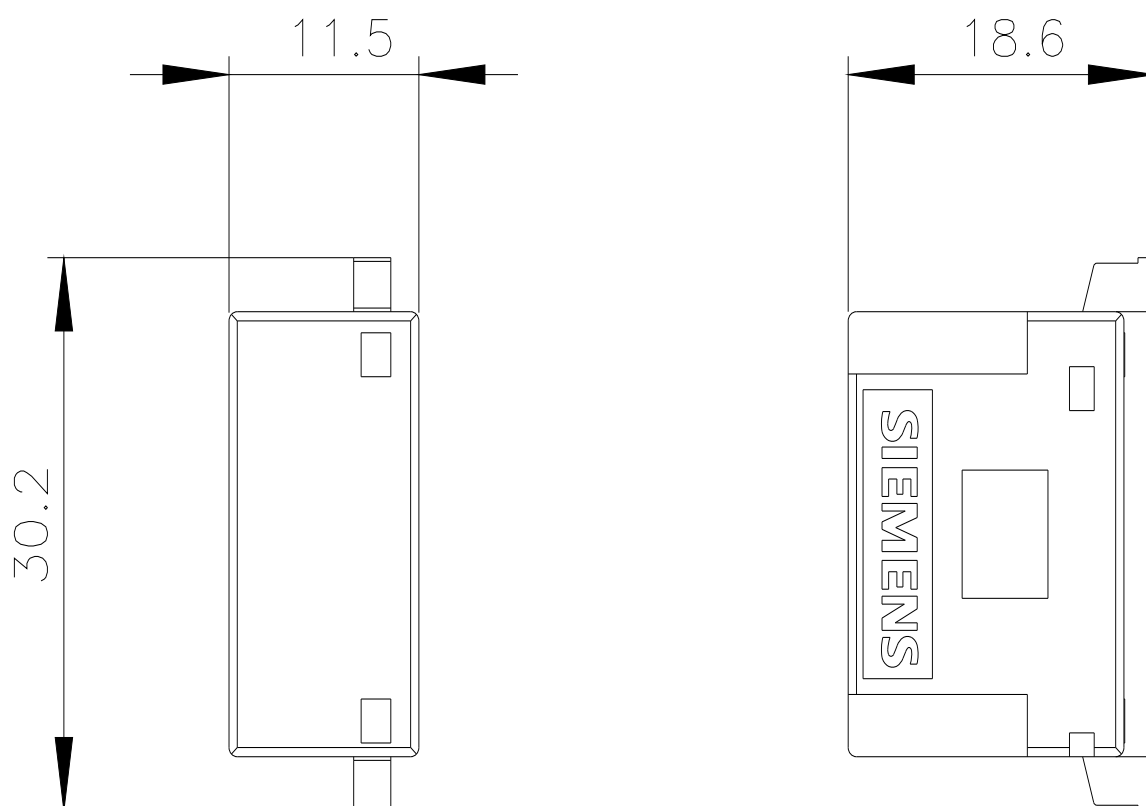

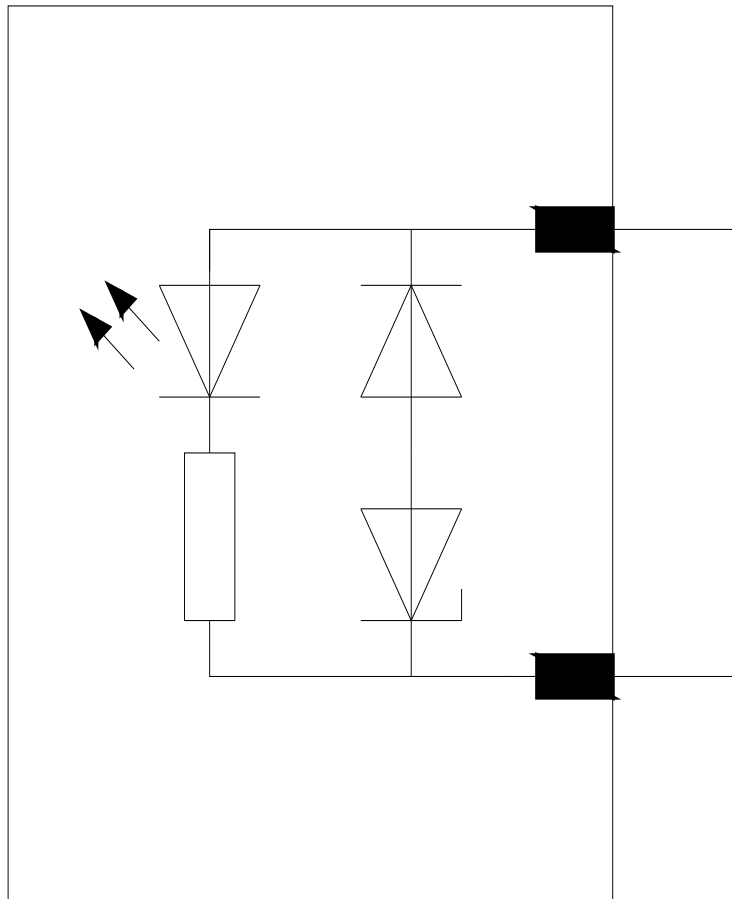

last modified:

10/22/2022 