



Note! Changed technical specification! See data sheet/declaration of compliance with the order Pneumatic timing relay block OFF delay 1 ... 60 s 1 NO + 1 NC, for motor contactors size S0 according to DIN VDE 0116 !!!  
Phased-out product !!!

General technical data		
product brand name		SIRIUS
product designation		pneumatic delay block
design of the product		off delay
size of contactor		S0
ambient temperature		
• during storage	°C	-50 ... +80
• during operation	°C	5 ... 50
protection class IP on the front		IP20
mechanical service life (operating cycles) typical		5 000 000
electrical endurance (operating cycles) at AC-15 at 230 V typical		1 000 000
mechanical service life (operating cycles)		
• with 3RT2.2 contactor		5 000 000
adjustable OFF-delay time	s	1 ... 60
insulation voltage with degree of pollution 3 at AC rated value	V	690
relative accuracy of the operating delay time/backslide delay time related to set value	%	20
Auxiliary circuit		
operational current		
• of auxiliary contacts		
— at AC-12 maximum	A	10
— at AC-14		
— at 230 V	A	6
— at 400 V	A	4
— at 500 V	A	2.5
— at 690 V	A	1.5
— at AC-15		
— at 230 V	A	6
— at 400 V	A	4
— at DC-13		
— at 24 V	A	4
— at 48 V	A	2
— at 110 V	A	0.7
— at 220 V	A	0.3
— at 440 V	A	0.1
• at AC-15		
— at 500 V rated value	A	2.5
— at 690 V rated value	A	1.5
Short-circuit protection		
design of the fuse link for short-circuit protection of		Fuse gG 10 A with short-circuit current I <sub>k</sub> = 1 kA according

the auxiliary switch required		to IEC 60947-5-1
<b>Installation/ mounting/ dimensions</b>		
fastening method		clip-on
width	mm	45
height	mm	44.6
depth	mm	83.5
mounting position		any
<b>Connections/ Terminals</b>		
type of electrical connection for auxiliary and control circuit		screw-type terminals
<b>type of connectable conductor cross-sections</b>		
• for auxiliary contacts		
— solid		2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )
— finely stranded		
— with core end processing		2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )
• at AWG cables for auxiliary contacts		2x (18 ... 14), 2x (20 ... 16)
<b>Certificates/ approvals</b>		
certificate of suitability		CE / UL / CSA / CCC
<b>General Product Approval</b>		<b>EMC</b>



[Confirmation](#)






<b>Declaration of Conformity</b>	<b>Marine / Shipping</b>	<b>other</b>

[Confirmation](#)

<b>other</b>	<b>Environment</b>
	<a href="#">Environmental Confirmations</a>

<b>Safety related data</b>	
touch protection against electrical shock	finger-safe
<b>Further information</b>	
Information- and Downloadcenter (Catalogs, Brochures,...) <a href="https://www.siemens.com/ic10">https://www.siemens.com/ic10</a> Industry Mall (Online ordering system) <a href="https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2926-2PR11-0MT0">https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2926-2PR11-0MT0</a> Cax online generator <a href="http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&amp;mlfb=3RT2926-2PR11-0MT0">http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&amp;mlfb=3RT2926-2PR11-0MT0</a> Service&Support (Manuals, Certificates, Characteristics, FAQs,...) <a href="https://support.industry.siemens.com/cs/ww/en/ps/3RT2926-2PR11-0MT0">https://support.industry.siemens.com/cs/ww/en/ps/3RT2926-2PR11-0MT0</a> Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) <a href="http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2926-2PR11-0MT0&amp;lang=en">http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2926-2PR11-0MT0&amp;lang=en</a>	

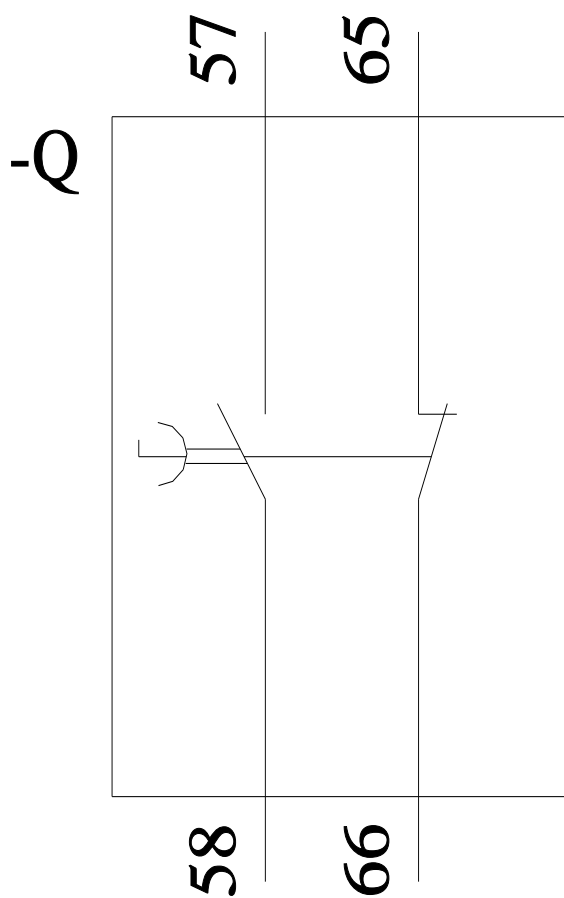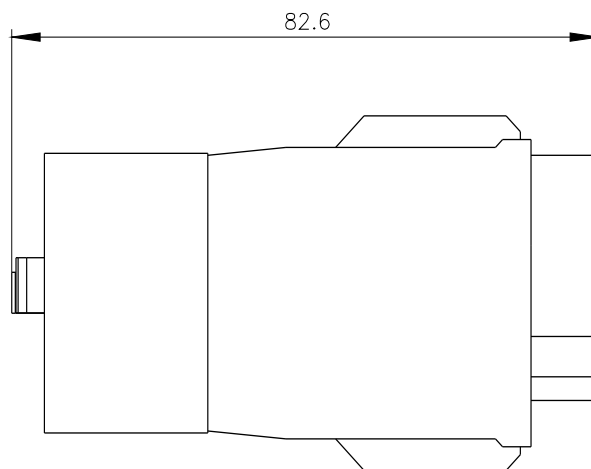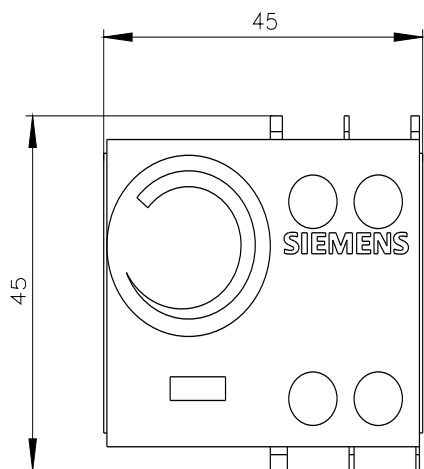

last modified:

10/1/2021 