



Overload relay 28...40 A For motor protection Size S2, Class 10 Contactor mounting Main circuit: Screw terminal Auxiliary circuit: Spring-type terminal Manual-Automatic-Reset !!! Phased-out product !!! Successor is SIRIUS 3RU2 Preferred successor type is >>3RU2136-4FD0<<

product brand name

SIRIUS

product designation

thermal overload relay

General technical data

size of overload relay

S2

size of contactor can be combined company-specific
power loss [W] for rated value of the current at AC in hot operating state

S2

15.6 W

- per pole

5.2 W

insulation voltage with degree of pollution 3 at AC rated value

690 V

surge voltage resistance rated value

6 kV

protection class IP on the front

IP20

shock resistance

8g / 10 ms

type of protection

DMT 98 ATEX G 001

reference code according to IEC 81346-2

F

Substance Prohibition (Date)

07/01/2006

Ambient conditions

installation altitude at height above sea level maximum

2 000 m

ambient temperature

- during operation
- during storage
- during transport

-20 ... +70 °C

-55 ... +80 °C

-55 ... +80 °C

relative humidity during operation

100 %

Main circuit

number of poles for main current circuit

3

adjustable current response value current of the current-dependent overload release

28 ... 40 A

Auxiliary circuit

number of NC contacts for auxiliary contacts

1

number of NO contacts for auxiliary contacts

1

number of CO contacts for auxiliary contacts

0

operational current of auxiliary contacts at AC-15

- at 24 V
- at 110 V
- at 120 V
- at 125 V
- at 230 V
- at 400 V

3 A

3 A

3 A

3 A

2 A

1 A

operational current of auxiliary contacts at DC-13

- at 24 V
- at 110 V
- at 125 V

1 A

0.22 A

0.22 A

● at 220 V		0.11 A
Protective and monitoring functions		
trip class		CLASS 10
Short-circuit protection		
design of the fuse link		fuse gL/gG: 6 A, quick: 10 A
● for short-circuit protection of the auxiliary switch required		
Installation/ mounting/ dimensions		
mounting position		with vertical mounting surface +/-135° rotatable, with vertical mounting surface +/- 45° tiltable to the front and back
fastening method		Contactormounting
height		105 mm
width		55 mm
depth		118 mm
required spacing		
● with side-by-side mounting		
— forwards		0 mm
— backwards		0 mm
— upwards		0 mm
— downwards		0 mm
— at the side		0 mm
● for grounded parts		
— forwards		0 mm
— backwards		0 mm
— upwards		0 mm
— at the side		6 mm
— downwards		0 mm
● for live parts		
— forwards		0 mm
— backwards		0 mm
— upwards		0 mm
— downwards		0 mm
— at the side		6 mm
Connections/ Terminals		
product component removable terminal for auxiliary and control circuit		No
type of electrical connection		
● for main current circuit		screw-type terminals
● for auxiliary and control circuit		Cage Clamp terminals
type of connectable conductor cross-sections		
● for main contacts		
— solid		2x (0.75 ... 16 mm²)
— stranded		2x (0.75 ... 25 mm²), 0.75 ... 35 mm²
— finely stranded with core end processing		2x (0.75 ... 16 mm²), 0.75 ... 25 mm²
● at AWG cables for main contacts		2x (18 ... 3), 1x (18 ... 1)
type of connectable conductor cross-sections		
● for auxiliary contacts		
— solid		2x (0.5 ... 2.5 mm²)
— finely stranded with core end processing		2x (0.5 ... 1.5 mm²)
— finely stranded without core end processing		2x (0.5 ... 1.5 mm²)
● at AWG cables for auxiliary contacts		2x (20 ... 14)
Safety related data		
touch protection against electrical shock		finger-safe
Certificates/ approvals		
General Product Approval		For use in hazardous locations



[Confirmation](#)



For use in hazardous locations	Declaration of Conformity	Test Certificates	Marine / Shipping
--------------------------------	---------------------------	-------------------	-------------------



[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)



Marine / Shipping	other	Railway
-------------------	-------	---------



[Miscellaneous](#)

[Confirmation](#)

[Special Test Certificate](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RU1136-4FD0>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RU1136-4FD0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RU1136-4FD0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)



http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RU1136-4FD0&lang=en


Characteristic: Tripping characteristics, I²t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RU1136-4FD0/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RU1136-4FD0&objecttype=14&gridview=view1>

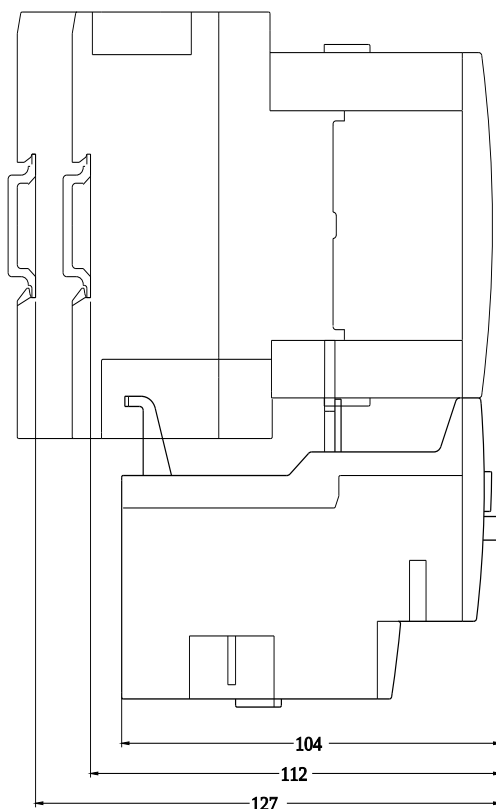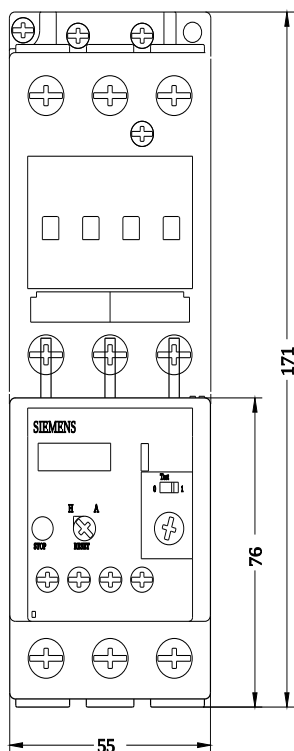

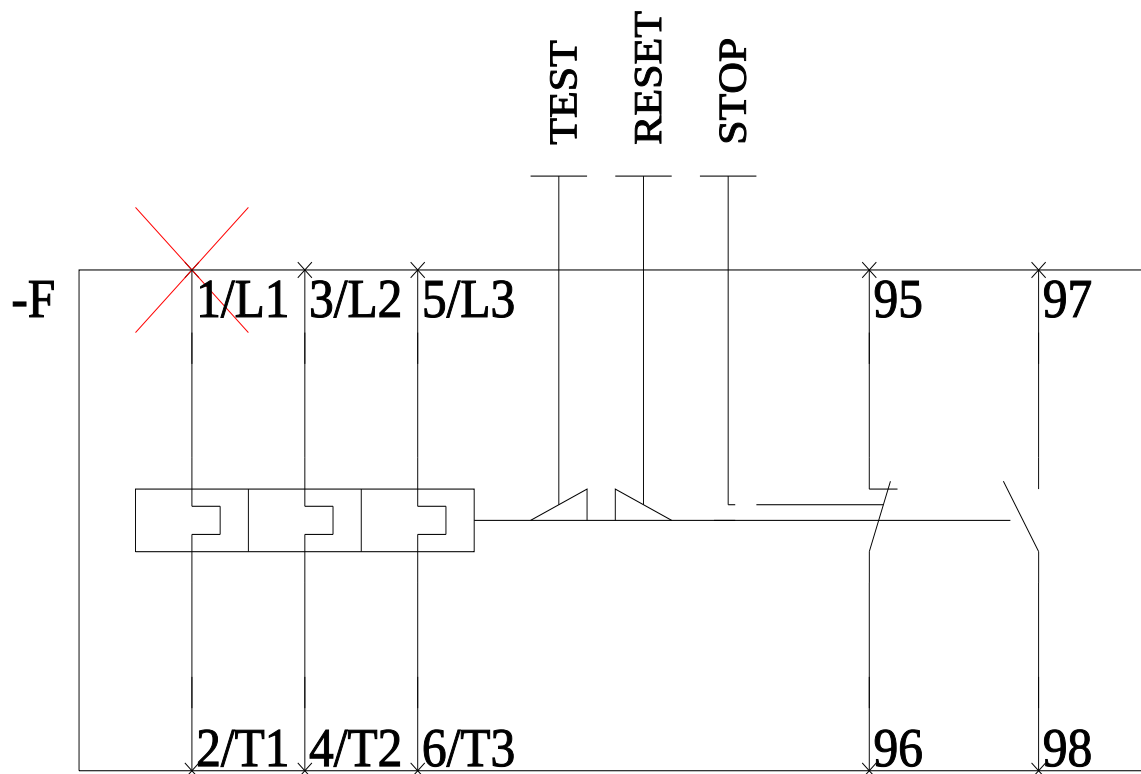

last modified:

2/11/2021 [🔗](#)