

3RU2126-1GC0 THERM. OVERLOAD RELAY 4.5 - 6.3 A

THERM. OVERLOAD RELAY 4.5 - 6.3 A

General technical data:		
Product brand name		SIRIUS
Protection class IP / frontal/front side		IP20
Insulation voltage / with degree of pollution 3		
• rated value	V	690
Altitude of installation site / at a height over sea level / maximum	m	2,000
Ambient temperature		
• during transport	°C	-55...80
• during storage	°C	-55...80
• during the operating phase	°C	-40...70
Relative humidity		
• during the operating phase	/ %	90
Resistance against shock		8g / 10 ms
Impulse voltage resistance / rated value	kV	6
Real loss power / total / typical	W	3.9
Item designation		
• according to DIN 40719 extendable after IEC 204-2 / according to IEC 750		F
• according to DIN EN 61346-2		F
Trip class		CLASS 10
Type of assignment		2
Size of overload relay		S0
Size of the contactor / can be combined		
• company-specific		S0
Main circuit:		
Number of poles / for main current circuit		3
Operating voltage / at 3 AC / rated value		
• maximum	V	690
Operating current / at AC-3 / at 400 V		
• rated value	A	6.3
Service power / at AC-3		
• at 400 V / rated value	kW	2.2
• at 500 V / rated value	kW	3
• at 690 V / rated value	W	4,000
Adjustable response current		
• of the current-dependent overload release	A	4.5...6.3
Operating current / of the fuse link / rated value	A	20
Auxiliary circuit:		
Contact reliability / of the auxiliary contacts		< 1 error per 100 million operating cycles
Number of NC contacts / for auxiliary contact		1
Number of NO contacts / for auxiliary contact		1
Number of change-over switches / for auxiliary contact		0
Operating current / of the auxiliary contacts		

- at AC-15
 - at 24 V
 - at 110 V
 - at 120 V
 - at 125 V
 - at 230 V
 - at 400 V
- at DC-13
 - at 24 V
 - at 110 V
 - at 125 V
 - at 220 V

A	3
A	3
A	3
A	3
A	2
A	1
A	1
A	0.22
A	0.22
A	0.11

Short-circuit:

Design of the fuse link / for short-circuit protection of the auxiliary switch / required

fuse gG: 10 A

Installation/mounting/dimensions:

built in orientation		vertical
Type of fixing/fixation		direct mounting
Width	mm	45
Height	mm	87
Depth	mm	73
distance, to be maintained, to the ranks assembly		
• forwards	mm	0
• backwards	mm	0
• upwards	mm	6
• downwards	mm	6
• sideways	mm	6
distance, to be maintained, to earthed part		
• forwards	mm	0
• backwards	mm	0
• upwards	mm	6
• downwards	mm	6
• sideways	mm	6
distance, to be maintained, conductive elements		
• forwards	mm	0
• backwards	mm	0
• upwards	mm	6
• downwards	mm	6
• sideways	mm	6

Connections:

design of the electrical connection	
• for main current circuit	spring-loaded terminals
• for auxiliary and control current circuit	spring-loaded terminals
Product function / removable terminal for auxiliary and control circuit	No
Type of the connectable conductor cross-section	
• for main contacts	
• unifilar	2x (1 ... 10 mm ²)
• stranded wire	2x (1.0 ... 10 mm ²)
• stranded wire	
• with conductor end processing	2x (1 ... 6 mm ²)
• without conductor final cutting	2x (1 ... 6 mm ²)
• at AWG-conductors / for main contacts	1x (18 ... 8)

- for auxiliary contacts
- solid
- finely stranded
 - with wire end processing
 - without conductor final cutting
- for AWG conductors / for auxiliary contacts

2x (0.5 ... 2.5 mm²)

2x (0.5 ... 1.5 mm²)

2 x (0.5 ... 1.5 mm²)

2x (20 ... 14)

Certificates/approvals:

verification of suitability	CE / UL / CSA
• ATEX	No

Safety:

Mean time to failure (MTTF) / with high demand rate		
• according to SN 31920	a	2,280
Proportion of dangerous failures		
• with low demand rate / according to SN 31920	%	50
• with high demand rate / according to SN 31920	%	50
Failure rate (FIT value) / with low demand rate		
• according to SN 31920	FIT	50
T1 value / for proof test interval or service life		
• according to IEC 61508	a	20
Protection against electrical shock		finger-safe

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Global Industry Mall (Online ordering system)



<http://www.siemens.com/industrial-controls/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RU2126-1GC0/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RU2126-1GC0

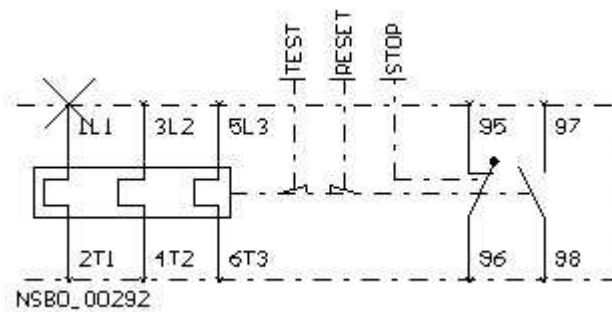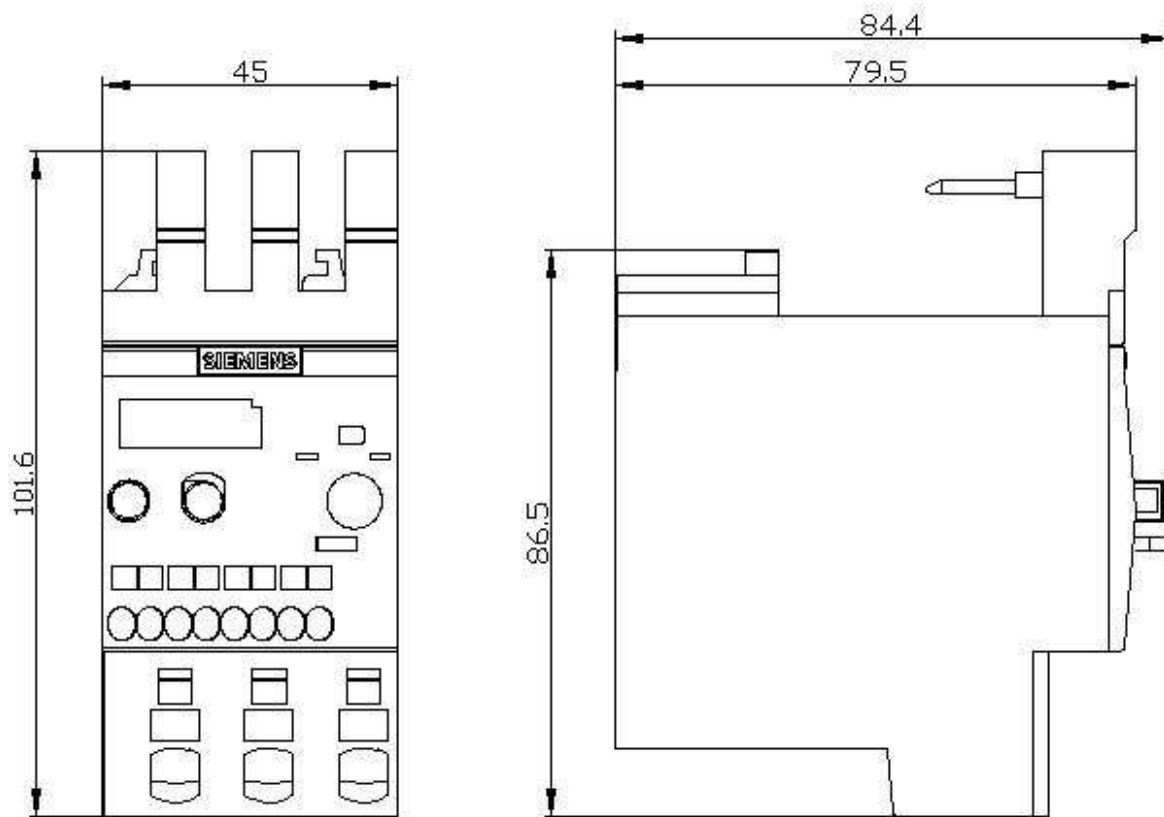

last change:

Apr 26, 2010