



Overload relay 70...80 A Thermal For motor protection Size S2, Class 10A Stand-alone installation Main circuit: Screw Auxiliary circuit: Screw Manual-Automatic-Reset

| | |
|--|--|
| product brand name | SIRIUS |
| product designation | thermal overload relay |
| product type designation | 3RU2 |
| General technical data | |
| size of overload relay | S2 |
| size of contactor can be combined company-specific | S2 |
| power loss [W] for rated value of the current at AC in hot operating state | 18.9 W |
| <ul style="list-style-type: none"> per pole | 6.3 W |
| insulation voltage with degree of pollution 3 at AC rated value | 690 V |
| surge voltage resistance rated value | 6 kV |
| maximum permissible voltage for safe isolation in networks with grounded star point | |
| <ul style="list-style-type: none"> between auxiliary and auxiliary circuit between auxiliary and auxiliary circuit between main and auxiliary circuit between main and auxiliary circuit | 415 V 415 V 690 V 690 V |
| shock resistance according to IEC 60068-2-27 | 8g / 11 ms |
| type of protection according to ATEX directive 2014/34/EU | Ex II (2) GD |
| certificate of suitability according to ATEX directive 2014/34/EU | DMT 98 ATEX G 001 |
| reference code according to IEC 81346-2 | F |
| Substance Prohibitance (Date) | 10/15/2014 |
| Ambient conditions | |
| installation altitude at height above sea level maximum | 2 000 m |
| ambient temperature | |
| <ul style="list-style-type: none"> during operation during storage during transport | -40 ... +70 °C -55 ... +80 °C -55 ... +80 °C |
| temperature compensation | -40 ... +60 °C |
| relative humidity during operation | 10 ... 95 % |
| Main circuit | |
| number of poles for main current circuit | 3 |
| adjustable current response value current of the current-dependent overload release | 70 ... 80 A |
| operating voltage | |
| <ul style="list-style-type: none"> rated value at AC-3e rated value maximum | 690 V 690 V |
| operating frequency rated value | 50 ... 60 Hz |
| operational current rated value | 80 A |
| operational current at AC-3e at 400 V rated value | 80 A |

| | |
|---|--|
| operating power | |
| <ul style="list-style-type: none"> ● at AC-3 <ul style="list-style-type: none"> — at 400 V rated value — at 500 V rated value — at 690 V rated value ● at AC-3e <ul style="list-style-type: none"> — at 400 V rated value — at 500 V rated value — at 690 V rated value | 37 kW 55 kW 75 kW 37 kW 55 kW 75 kW |
| Auxiliary circuit | |
| design of the auxiliary switch | integrated |
| number of NC contacts for auxiliary contacts | 1 |
| <ul style="list-style-type: none"> ● note | for contactor disconnection |
| number of NO contacts for auxiliary contacts | 1 |
| <ul style="list-style-type: none"> ● note | for message "Tripped" |
| number of CO contacts for auxiliary contacts | 0 |
| operational current of auxiliary contacts at AC-15 | |
| <ul style="list-style-type: none"> ● at 24 V ● at 110 V ● at 120 V ● at 125 V ● at 230 V ● at 400 V ● at 690 V | 3 A 3 A 3 A 3 A 2 A 1 A 0.75 A |
| operational current of auxiliary contacts at DC-13 | |
| <ul style="list-style-type: none"> ● at 24 V ● at 60 V ● at 110 V ● at 125 V ● at 220 V | 2 A 0.3 A 0.22 A 0.22 A 0.11 A |
| design of the miniature circuit breaker for short-circuit protection of the auxiliary switch required | 6A (SCC less than equal to 0.5 kA; U less than equal to 260V) |
| contact rating of auxiliary contacts according to UL | B600 / R300 |
| Protective and monitoring functions | |
| trip class | CLASS 10A |
| design of the overload release | thermal |
| UL/CSA ratings | |
| full-load current (FLA) for 3-phase AC motor | |
| <ul style="list-style-type: none"> ● at 480 V rated value ● at 600 V rated value | 80 A 80 A |
| Short-circuit protection | |
| design of the fuse link | |
| <ul style="list-style-type: none"> ● for short-circuit protection of the auxiliary switch required | fuse gG: 6 A, quick: 10 A |
| Installation/ mounting/ dimensions | |
| mounting position | any |
| fastening method | stand-alone installation |
| height | 105 mm |
| width | 55 mm |
| depth | 117 mm |
| Connections/ Terminals | |
| product component removable terminal for auxiliary and control circuit | No |
| type of electrical connection | |
| <ul style="list-style-type: none"> ● for main current circuit ● for auxiliary and control circuit | screw-type terminals screw-type terminals |
| arrangement of electrical connectors for main current circuit | Top and bottom |
| type of connectable conductor cross-sections for main contacts | |
| <ul style="list-style-type: none"> ● solid or stranded ● finely stranded with core end processing | 2x (1 ... 35 mm ²), 1x (1 ... 50 mm ²) 2x (1 ... 25 mm ²), 1x (1 ... 35 mm ²) |
| type of connectable conductor cross-sections | |

- for auxiliary contacts
 - solid or stranded
 - finely stranded with core end processing
- at AWG cables for auxiliary contacts

2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²)
 2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²)
 2x (20 ... 16), 2x (18 ... 14)

tightening torque

- for main contacts with screw-type terminals
- for auxiliary contacts with screw-type terminals

3 ... 4.5 N·m
 0.8 ... 1.2 N·m
 Diameter 5 ... 6 mm
 Pozidriv PZ 2

design of screwdriver shaft

size of the screwdriver tip

design of the thread of the connection screw

- for main contacts
- of the auxiliary and control contacts

M6
 M3

Safety related data

T1 value for proof test interval or service life according to IEC 61508

20 a

protection class IP on the front according to IEC 60529

IP20

touch protection on the front according to IEC 60529

finger-safe, for vertical contact from the front

Display

display version for switching status

Slide switch

Certificates/ approvals

General Product Approval

For use in hazardous locations



[Confirmation](#)



For use in hazardous locations

Declaration of Conformity

Test Certificates

Marine / Shipping



[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)



Marine / Shipping



other

Railway

[Confirmation](#)

[Special Test Certificate](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mfb=3RU2136-4RB1>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RU2136-4RB1>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RU2136-4RB1>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RU2136-4RB1&lang=en


Characteristic: Tripping characteristics, I^t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RU2136-4RB1/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RU2136-4RB1&objecttype=14&gridview=view1>

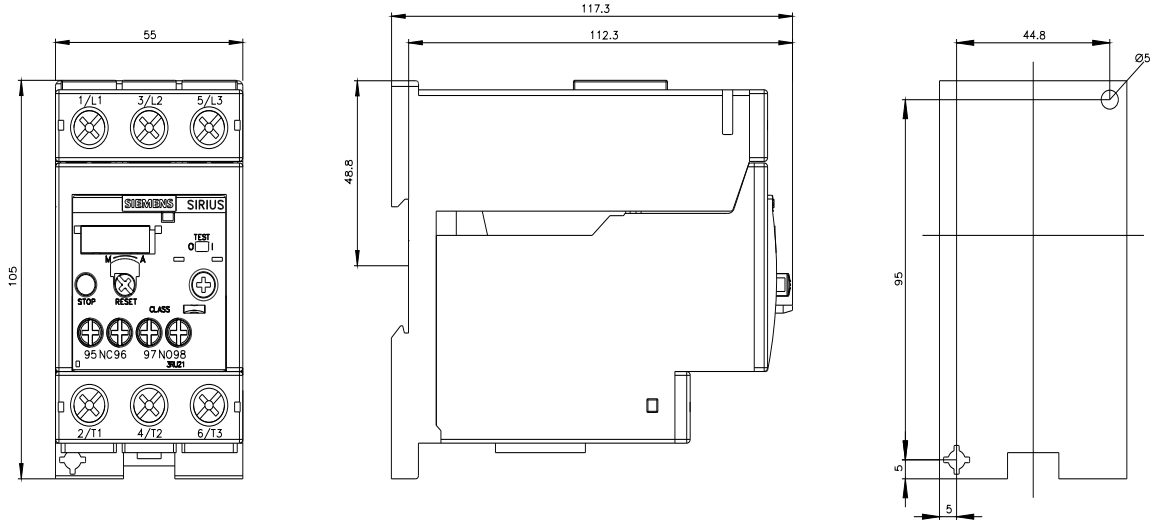

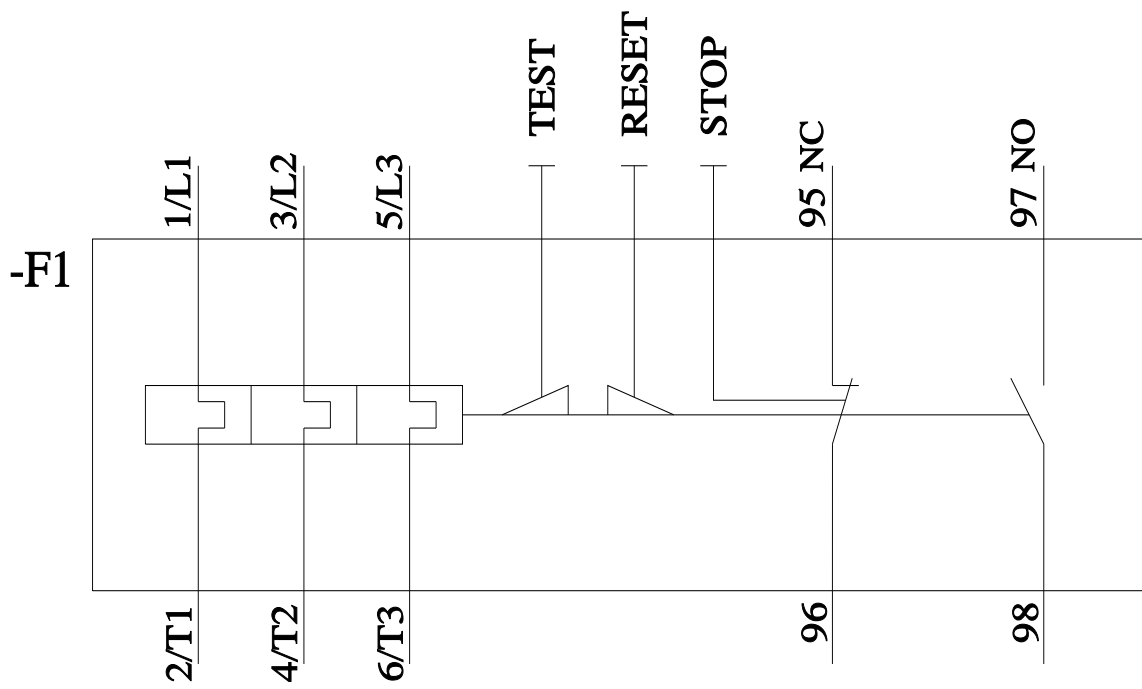

last modified:

3/8/2022 