

EINZELAUFSTELLUNGSTRAEGER FUER
 3RU21/3RB30/3RB31 BGR S0 EINZELAUFSTELLUNG
 HAUPTSTROMKR.: SCHRAUBANS. HILFSSTROMKR.: --

General technical data:

Product brand name		SIRIUS
Product designation		individual mount
Size of overload relay		S0
Ambient temperature		
<ul style="list-style-type: none"> during storage 	°C	-55 ... 80
<ul style="list-style-type: none"> during the operating phase 	°C	-20 ... 70

Installation/mounting/dimensions:

Type of fixing/fixation		screw and snap-on mounting onto 35 mm standard mounting rail
Width	mm	45
Height	mm	95
Depth	mm	86

Connections:

design of the electrical connection		
<ul style="list-style-type: none"> for main current circuit 		screw-type terminals
Type of the connectable conductor cross-section		
<ul style="list-style-type: none"> for main contacts <ul style="list-style-type: none"> unifilar stranded wire stranded wire <ul style="list-style-type: none"> with conductor end processing at AWG-conductors <ul style="list-style-type: none"> for main contacts 		1 ... 10 mm ² 1 ... 10 mm ² 1 ... 10 mm ² 1x (16 ... 8)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)




<http://www.siemens.com/industrial-controls/catalogs>

Global Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RU2926-3AA01/all>

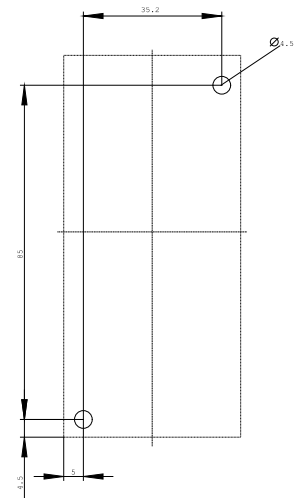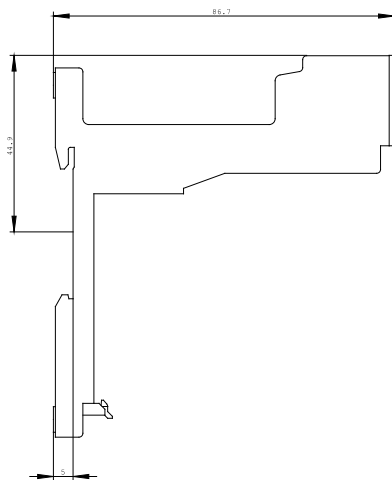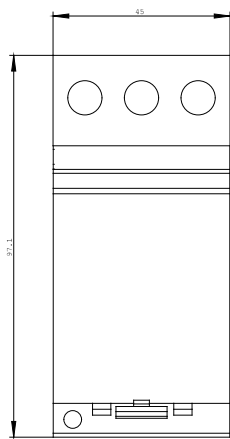

last change:

Apr 26, 2010