



stand-alone assembly support for
3RU21/3RB30/3RB31/3RR2 Size S2 Stand-alone installation
Main circuit: Screw

General technical data		
product brand name		SIRIUS
product designation		individual mount
size of overload relay		S2
protection class IP on the front according to IEC 60529		IP20
touch protection on the front according to IEC 60529		finger-safe, for vertical contact from the front
ambient temperature		
• during storage	°C	-50 ... +80
• during operation	°C	-20 ... +70
Installation/ mounting/ dimensions		
fastening method		screw and snap-on mounting onto 35 mm standard mounting rail
width	mm	55
height	mm	105
depth	mm	110
Connections/ Terminals		
type of electrical connection		screw-type terminals
• for main current circuit		
type of connectable conductor cross-sections		
• for main contacts finely stranded		
— with core end processing		1x (1 ... 35 mm²)
• at AWG cables for main contacts		1x (18 ... 1)
Certificates/ approvals		
General Product Approval		Declaration of Conformity



[Confirmation](#)



EG-Konf.

Declaration of Conformity	Test Certificates	Marine / Shipping
---------------------------	-------------------	-------------------



[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)



LRS

[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RU2936-3AA01>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RU2936-3AA01>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RU2936-3AA01>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RU2936-3AA01&lang=en

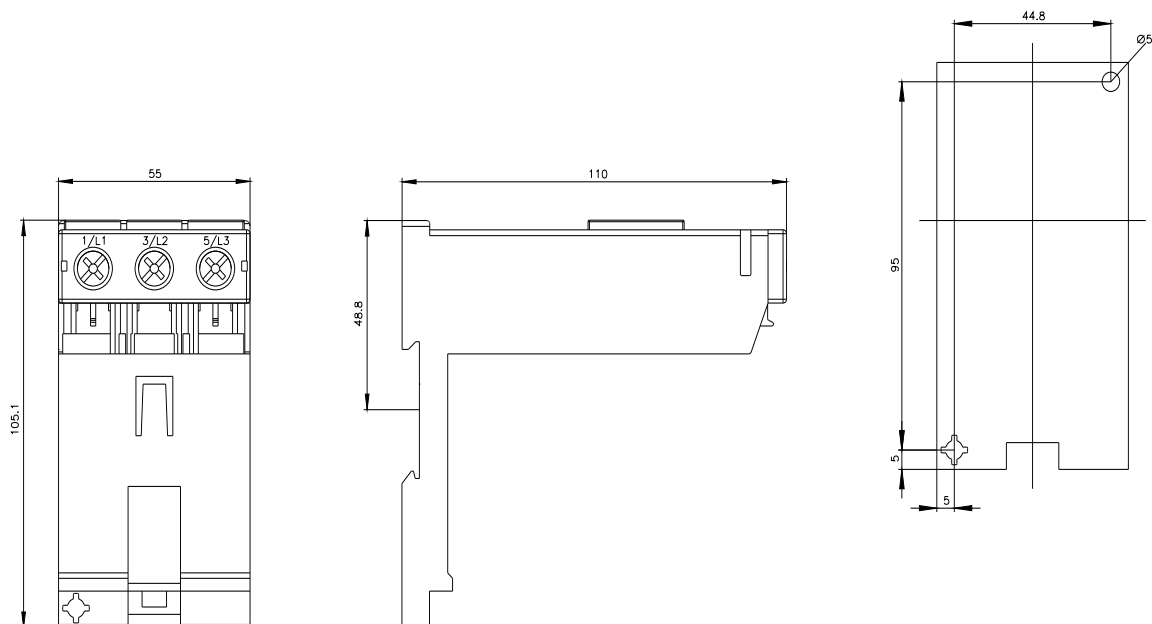

1/L1	3/L2	5/L3	

last modified: 12/15/2020 