



MOULDED-PLASTIC ENCLOSURE FOR WALL MOUNTING
DEGREE OF PROTECTION IP55,
WITH N AND PE TERMINAL LOCKABLE IN 0 POSITION
72MM

Certificates/approvals:

General Product Approval	Test Certificates	Shipping Approval	other
CQC	Manufacturer	ABS	Manufacturer

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

CAX-Online-Generator



<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RV1923-1DA00/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RV1923-1DA00

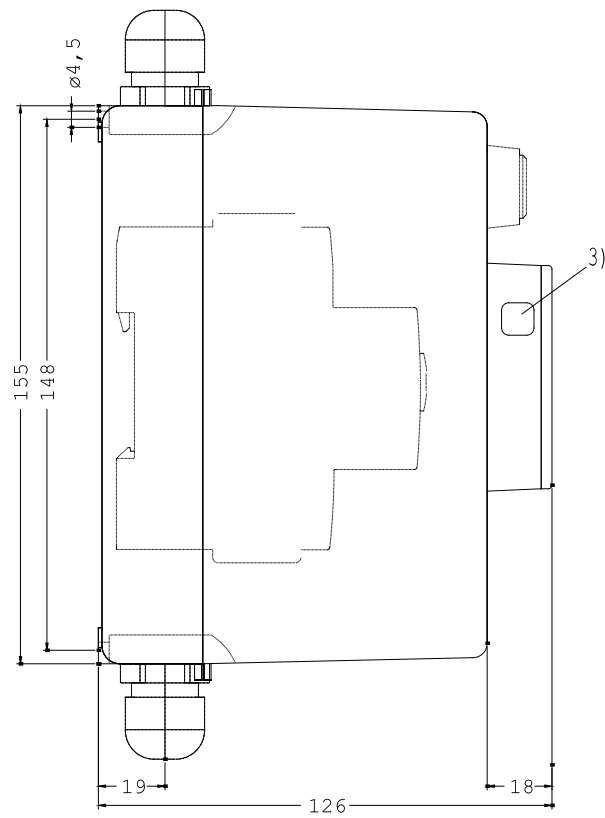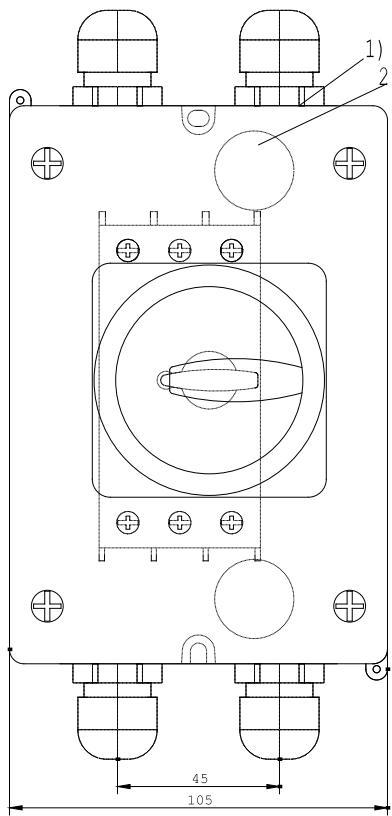

1) Öffnung für Verschraubung M25
 2) Öffnung für rückseitige Leitungseinführung
 3) Vorhängeschloss mit Buegeldurchmesser max. 8 mm

last change: