


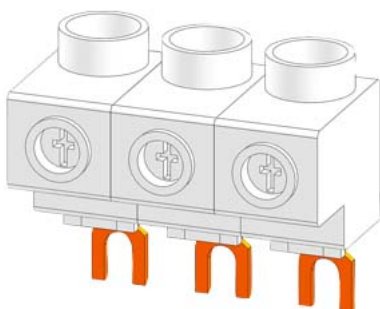

3-phase supply terminal for 3-phase busbars for size S0
 Connection from above Fork shape connections !!! Phased-out product !!! Successor is SIRIUS 3RV2 Preferred successor type is >>3RV2925-5AB<< for use at 3RA6 >>3RV2925-5EB<<

General technical data

product brand name		SIRIUS
product designation		3-phase supply terminal
size of the circuit-breaker		S00, S0
insulation voltage with degree of pollution 3 at AC rated value	V	690
ambient temperature		
• during storage	°C	-50 ... +80
• during operation	°C	-20 ... +60
ampacity maximum	A	63

Installation/ mounting/ dimensions

width	mm	44.5
height	mm	39
depth	mm	27.2

Connections/ Terminals

type of electrical connection for main current circuit		screw-type terminals
type of connectable conductor cross-sections		
• for main contacts		
— solid		1x (2.5 ... 16 mm²)
— stranded		1x (2.5 ... 25 mm²)
— finely stranded		
— with core end processing		1x (4 ... 16 mm²)
• at AWG cables for main contacts		1x (10 ... 4)

Certificates/ approvals

certificate of suitability	CE / UL / CSA / CCC
----------------------------	---------------------

General Product Approval	Declaration of Conformity
--------------------------	---------------------------



[Confirmation](#)



Marine / Shipping

other



[Confirmation](#)



Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV1925-5AB>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV1925-5AB>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RV1925-5AB>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV1925-5AB&lang=en

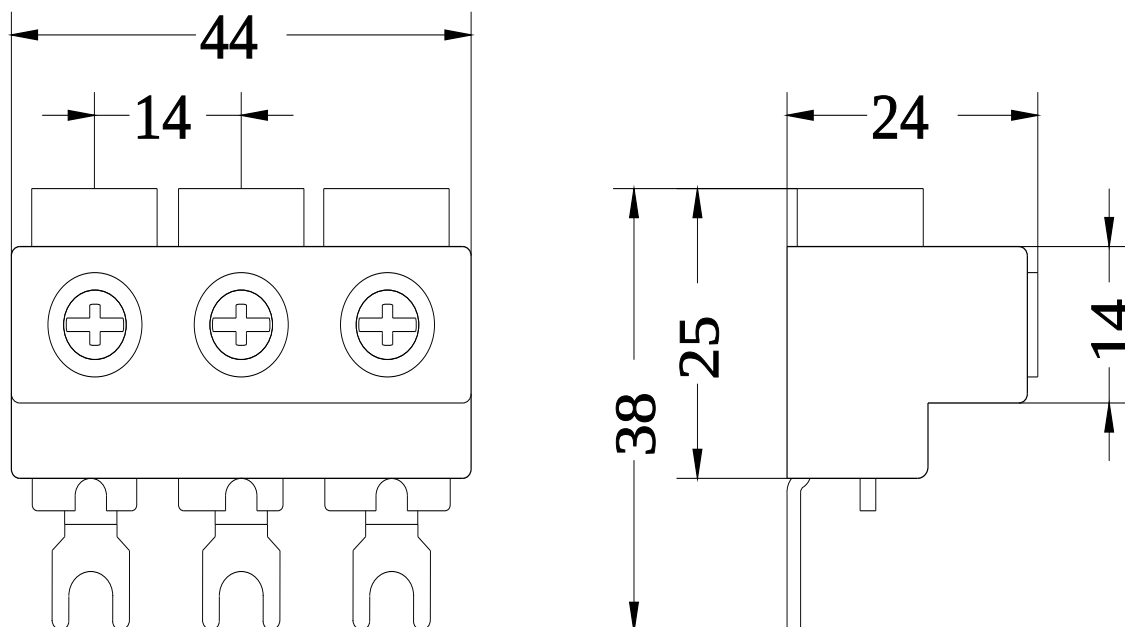

last modified:

7/7/2022