



Circuit breaker size S0 for motor protection, CLASS 10 A-release 27...32 A  
N-release 400 A Spring-type terminal Standard switching capacity with  
transverse auxiliary switches 1 NO+1 NC

|                          |                      |
|--------------------------|----------------------|
| product brand name       | SIRIUS               |
| product designation      | Circuit breaker      |
| design of the product    | For motor protection |
| product type designation | 3RV2                 |

### General technical data

|                                                                   |                   |
|-------------------------------------------------------------------|-------------------|
| size of the circuit-breaker                                       | S0                |
| size of contactor can be combined company-specific                | S00, S0           |
| product extension auxiliary switch                                | Yes               |
| power loss [W] for rated value of the current                     |                   |
| • at AC in hot operating state                                    | 13.25 W           |
| • at AC in hot operating state per pole                           | 4.4 W             |
| insulation voltage with degree of pollution 3 at AC rated value   | 690 V             |
| surge voltage resistance rated value                              | 6 kV              |
| shock resistance according to IEC 60068-2-27                      | 25g / 11 ms       |
| mechanical service life (operating cycles)                        |                   |
| • of the main contacts typical                                    | 100 000           |
| • of auxiliary contacts typical                                   | 100 000           |
| electrical endurance (operating cycles) typical                   | 100 000           |
| type of protection according to ATEX directive 2014/34/EU         | Ex II (2) GD      |
| certificate of suitability according to ATEX directive 2014/34/EU | DMT 02 ATEX F 001 |
| reference code according to IEC 81346-2                           | Q                 |
| Substance Prohibitance (Date)                                     | 10/01/2009        |

### Ambient conditions

|                                                         |                |
|---------------------------------------------------------|----------------|
| installation altitude at height above sea level maximum | 2 000 m        |
| ambient temperature                                     |                |
| • during operation                                      | -20 ... +60 °C |
| • during storage                                        | -50 ... +80 °C |
| • during transport                                      | -50 ... +80 °C |
| relative humidity during operation                      | 10 ... 95 %    |

### Main circuit

|                                                                                     |              |
|-------------------------------------------------------------------------------------|--------------|
| number of poles for main current circuit                                            | 3            |
| adjustable current response value current of the current-dependent overload release | 27 ... 32 A  |
| operating voltage                                                                   |              |
| • rated value                                                                       | 20 ... 690 V |
| • at AC-3 rated value maximum                                                       | 690 V        |
| • at AC-3e rated value maximum                                                      | 690 V        |
| operating frequency rated value                                                     | 50 ... 60 Hz |
| operational current rated value                                                     | 32 A         |

|                                                                      |             |
|----------------------------------------------------------------------|-------------|
| <b>operational current</b>                                           |             |
| • at AC-3 at 400 V rated value                                       | 32 A        |
| • at AC-3e at 400 V rated value                                      | 32 A        |
| <b>operating power</b>                                               |             |
| • at AC-3                                                            |             |
| — at 230 V rated value                                               | 7.5 kW      |
| — at 400 V rated value                                               | 15 kW       |
| — at 500 V rated value                                               | 18.5 kW     |
| — at 690 V rated value                                               | 30 kW       |
| • at AC-3e                                                           |             |
| — at 230 V rated value                                               | 7.5 kW      |
| — at 400 V rated value                                               | 15 kW       |
| — at 500 V rated value                                               | 18.5 kW     |
| — at 690 V rated value                                               | 30 kW       |
| <b>operating frequency</b>                                           |             |
| • at AC-3 maximum                                                    | 15 1/h      |
| • at AC-3e maximum                                                   | 15 1/h      |
| <b>Auxiliary circuit</b>                                             |             |
| <b>design of the auxiliary switch</b>                                | transverse  |
| <b>number of NC contacts for auxiliary contacts</b>                  | 1           |
| <b>number of NO contacts for auxiliary contacts</b>                  | 1           |
| number of CO contacts for auxiliary contacts                         | 0           |
| <b>operational current of auxiliary contacts at AC-15</b>            |             |
| • at 24 V                                                            | 2 A         |
| • at 120 V                                                           | 0.5 A       |
| • at 125 V                                                           | 0.5 A       |
| • at 230 V                                                           | 0.5 A       |
| <b>operational current of auxiliary contacts at DC-13</b>            |             |
| • at 24 V                                                            | 1 A         |
| • at 60 V                                                            | 0.15 A      |
| <b>Protective and monitoring functions</b>                           |             |
| <b>product function</b>                                              |             |
| • ground fault detection                                             | No          |
| • phase failure detection                                            | Yes         |
| <b>trip class</b>                                                    | CLASS 10    |
| <b>design of the overload release</b>                                | thermal     |
| <b>maximum short-circuit current breaking capacity (Icu)</b>         |             |
| • at AC at 240 V rated value                                         | 100 kA      |
| • at AC at 400 V rated value                                         | 55 kA       |
| • at AC at 500 V rated value                                         | 10 kA       |
| • at AC at 690 V rated value                                         | 4 kA        |
| <b>operating short-circuit current breaking capacity (Ics) at AC</b> |             |
| • at 240 V rated value                                               | 100 kA      |
| • at 400 V rated value                                               | 25 kA       |
| • at 500 V rated value                                               | 5 kA        |
| • at 690 V rated value                                               | 2 kA        |
| response value current of instantaneous short-circuit trip unit      | 400 A       |
| <b>UL/CSA ratings</b>                                                |             |
| <b>full-load current (FLA) for 3-phase AC motor</b>                  |             |
| • at 480 V rated value                                               | 32 A        |
| • at 600 V rated value                                               | 32 A        |
| <b>yielded mechanical performance [hp]</b>                           |             |
| • for single-phase AC motor                                          |             |
| — at 110/120 V rated value                                           | 2 hp        |
| — at 230 V rated value                                               | 5 hp        |
| • for 3-phase AC motor                                               |             |
| — at 200/208 V rated value                                           | 7.5 hp      |
| — at 220/230 V rated value                                           | 10 hp       |
| — at 460/480 V rated value                                           | 20 hp       |
| <b>contact rating of auxiliary contacts according to UL</b>          | C300 / R300 |
| <b>Short-circuit protection</b>                                      |             |

|                                                                                                                   |                                                                                         |
|-------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|
| <b>product function short circuit protection</b>                                                                  | Yes                                                                                     |
| <b>design of the short-circuit trip</b>                                                                           | magnetic                                                                                |
| <b>design of the fuse link</b>                                                                                    |                                                                                         |
| <ul style="list-style-type: none"> <li>• for short-circuit protection of the auxiliary switch required</li> </ul> | Fuse gL/gG: 10 A, miniature circuit breaker C 6 A (short-circuit current $I_k < 400$ A) |
| <b>design of the fuse link for IT network for short-circuit protection of the main circuit</b>                    |                                                                                         |
| <ul style="list-style-type: none"> <li>• at 400 V</li> </ul>                                                      | gL/gG 63 A                                                                              |
| <ul style="list-style-type: none"> <li>• at 500 V</li> </ul>                                                      | gL/gG 63 A                                                                              |
| <ul style="list-style-type: none"> <li>• at 690 V</li> </ul>                                                      | gL/gG 63 A                                                                              |

#### Installation/ mounting/ dimensions

|                                                                                                                                                                                                                                   |                                                                          |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------|
| <b>mounting position</b>                                                                                                                                                                                                          | any                                                                      |
| <b>fastening method</b>                                                                                                                                                                                                           | screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 |
| <b>height</b>                                                                                                                                                                                                                     | 119 mm                                                                   |
| <b>width</b>                                                                                                                                                                                                                      | 45 mm                                                                    |
| <b>depth</b>                                                                                                                                                                                                                      | 97 mm                                                                    |
| <b>required spacing</b>                                                                                                                                                                                                           |                                                                          |
| <ul style="list-style-type: none"> <li>• with side-by-side mounting at the side</li> </ul>                                                                                                                                        | 0 mm                                                                     |
| <ul style="list-style-type: none"> <li>• for grounded parts at 400 V <ul style="list-style-type: none"> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> </ul> </li> </ul>                                          | 30 mm<br>30 mm<br>9 mm                                                   |
| <ul style="list-style-type: none"> <li>• for live parts at 400 V <ul style="list-style-type: none"> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> </ul> </li> </ul>                                              | 30 mm<br>30 mm<br>9 mm                                                   |
| <ul style="list-style-type: none"> <li>• for grounded parts at 500 V <ul style="list-style-type: none"> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> </ul> </li> </ul>                                          | 30 mm<br>30 mm<br>9 mm                                                   |
| <ul style="list-style-type: none"> <li>• for live parts at 500 V <ul style="list-style-type: none"> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> </ul> </li> </ul>                                              | 30 mm<br>30 mm<br>9 mm                                                   |
| <ul style="list-style-type: none"> <li>• for grounded parts at 690 V <ul style="list-style-type: none"> <li>— downwards</li> <li>— upwards</li> <li>— backwards</li> <li>— at the side</li> <li>— forwards</li> </ul> </li> </ul> | 50 mm<br>50 mm<br>0 mm<br>30 mm<br>0 mm                                  |
| <ul style="list-style-type: none"> <li>• for live parts at 690 V <ul style="list-style-type: none"> <li>— downwards</li> <li>— upwards</li> <li>— backwards</li> <li>— at the side</li> <li>— forwards</li> </ul> </li> </ul>     | 50 mm<br>50 mm<br>0 mm<br>30 mm<br>0 mm                                  |

#### Connections/ Terminals

|                                                                                                                                                                                                                                                                                                    |                                                                                                                   |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|
| <b>type of electrical connection</b>                                                                                                                                                                                                                                                               |                                                                                                                   |
| <ul style="list-style-type: none"> <li>• for main current circuit</li> <li>• for auxiliary and control circuit</li> </ul>                                                                                                                                                                          | spring-loaded terminals<br>spring-loaded terminals                                                                |
| <b>arrangement of electrical connectors for main current circuit</b>                                                                                                                                                                                                                               | Top and bottom                                                                                                    |
| <b>type of connectable conductor cross-sections</b>                                                                                                                                                                                                                                                |                                                                                                                   |
| <ul style="list-style-type: none"> <li>• for main contacts <ul style="list-style-type: none"> <li>— solid or stranded</li> <li>— finely stranded with core end processing</li> <li>— finely stranded without core end processing</li> </ul> </li> <li>• at AWG cables for main contacts</li> </ul> | 2x (1 ... 10 mm <sup>2</sup> )<br>2x (1 ... 6 mm <sup>2</sup> )<br>2x (1 ... 6 mm <sup>2</sup> )<br>2x (18 ... 8) |
| <b>type of connectable conductor cross-sections</b>                                                                                                                                                                                                                                                |                                                                                                                   |
| <ul style="list-style-type: none"> <li>• for auxiliary contacts <ul style="list-style-type: none"> <li>— solid or stranded</li> <li>— finely stranded with core end processing</li> <li>— finely stranded without core end processing</li> </ul> </li> </ul>                                       | 2x (0.5 ... 2.5 mm <sup>2</sup> )<br>2x (0.5 ... 1.5 mm <sup>2</sup> )<br>2x (0.5 ... 1.5 mm <sup>2</sup> )       |

- at AWG cables for auxiliary contacts

design of screwdriver shaft

size of the screwdriver tip

2x (20 ... 14)  
Diameter 3 mm  
3,0 x 0,5 mm

#### Safety related data

##### B10 value

- with high demand rate according to SN 31920

5 000

##### proportion of dangerous failures

- with low demand rate according to SN 31920
- with high demand rate according to SN 31920

50 %

50 %

##### failure rate [FIT]

- with low demand rate according to SN 31920

50 FIT

T1 value for proof test interval or service life according to IEC 61508

10 a

protection class IP on the front according to IEC 60529

IP20

touch protection on the front according to IEC 60529  
display version for switching status

finger-safe, for vertical contact from the front  
Handle

#### Certificates/ approvals

General Product Approval

For use in hazard-  
ous locations



[Confirmation](#)



[KC](#)



For use in hazard-  
ous locations

Declaration of Conformity

Test Certificates

Marine / Shipping



[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)



#### Marine / Shipping



other

Railway

[Confirmation](#)



[Vibration and Shock](#)

[Confirmation](#)

#### Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2021-4EA25>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2021-4EA25>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RV2021-4EA25>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RV2021-4EA25&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2021-4EA25&lang=en)



**Characteristic: Tripping characteristics,  $I^2t$ , Let-through current**

<https://support.industry.siemens.com/cs/ww/en/ps/3RV2021-4EA25/char>

**Further characteristics (e.g. electrical endurance, switching frequency)**

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2021-4EA25&objecttype=14&gridview=view1>

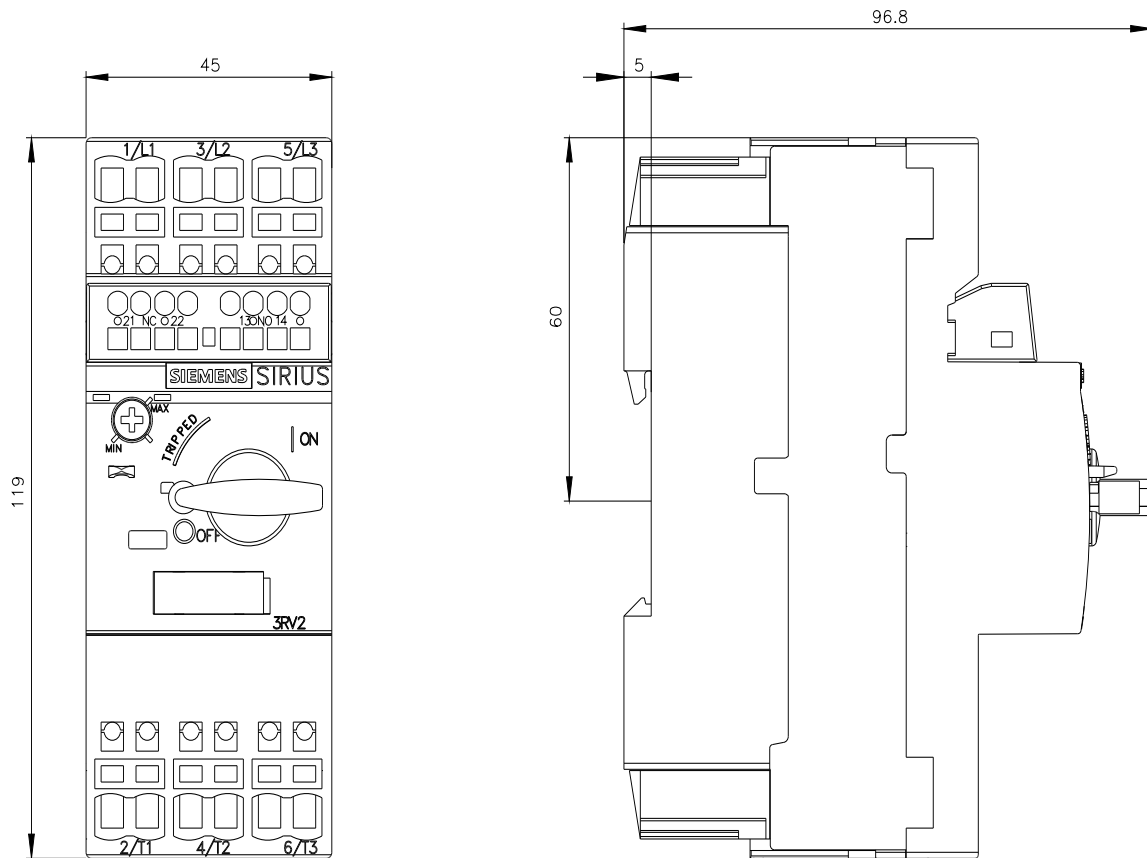

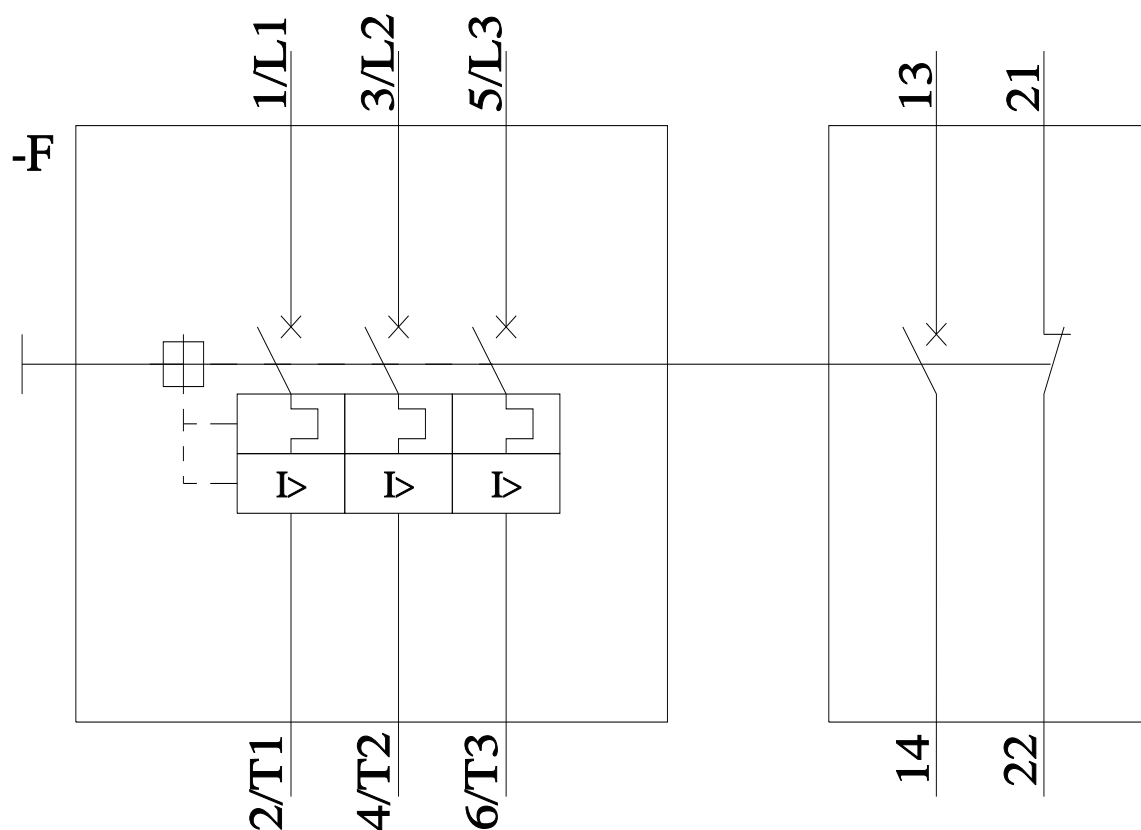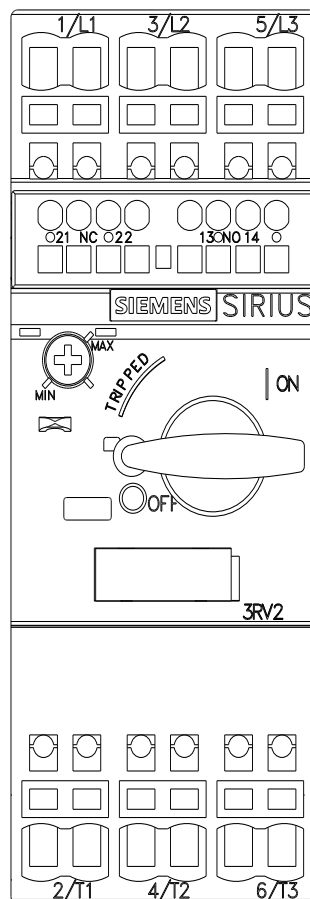

last modified:

11/21/2022