



Circuit breaker size S0 for motor protection, CLASS 10 A-release 23...28 A
N-release 364 A screw terminal Standard switching capacity with
transverse auxiliary switches 1 NO+1 NC

| | |
|--------------------------|----------------------|
| product brand name | SIRIUS |
| product designation | Circuit breaker |
| design of the product | For motor protection |
| product type designation | 3RV2 |

General technical data

| | |
|---|-------------------|
| size of the circuit-breaker | S0 |
| size of contactor can be combined company-specific | S00, S0 |
| product extension auxiliary switch | Yes |
| power loss [W] for rated value of the current | |
| • at AC in hot operating state | 13.25 W |
| • at AC in hot operating state per pole | 4.4 W |
| insulation voltage with degree of pollution 3 at AC rated value | 690 V |
| surge voltage resistance rated value | 6 kV |
| shock resistance according to IEC 60068-2-27 | 25g / 11 ms |
| mechanical service life (operating cycles) | |
| • of the main contacts typical | 100 000 |
| • of auxiliary contacts typical | 100 000 |
| electrical endurance (operating cycles) typical | 100 000 |
| type of protection according to ATEX directive 2014/34/EU | Ex II (2) GD |
| certificate of suitability according to ATEX directive 2014/34/EU | DMT 02 ATEX F 001 |
| reference code according to IEC 81346-2 | Q |
| Substance Prohibitance (Date) | 10/01/2009 |

Ambient conditions

| | |
|---|----------------|
| installation altitude at height above sea level maximum | 2 000 m |
| ambient temperature | |
| • during operation | -20 ... +60 °C |
| • during storage | -50 ... +80 °C |
| • during transport | -50 ... +80 °C |
| relative humidity during operation | 10 ... 95 % |

Main circuit

| | |
|---|--------------|
| number of poles for main current circuit | 3 |
| adjustable current response value current of the current-dependent overload release | 23 ... 28 A |
| operating voltage | |
| • rated value | 20 ... 690 V |
| • at AC-3 rated value maximum | 690 V |
| • at AC-3e rated value maximum | 690 V |
| operating frequency rated value | 50 ... 60 Hz |
| operational current rated value | 28 A |

| | |
|---|-------------|
| operational current | |
| • at AC-3 at 400 V rated value | 28 A |
| • at AC-3e at 400 V rated value | 28 A |
| operating power | |
| • at AC-3 | |
| — at 230 V rated value | 7.5 kW |
| — at 400 V rated value | 15 kW |
| — at 500 V rated value | 18.5 kW |
| — at 690 V rated value | 22 kW |
| • at AC-3e | |
| — at 230 V rated value | 7.5 kW |
| — at 400 V rated value | 15 kW |
| — at 500 V rated value | 18.5 kW |
| — at 690 V rated value | 22 kW |
| operating frequency | |
| • at AC-3 maximum | 15 1/h |
| • at AC-3e maximum | 15 1/h |
| Auxiliary circuit | |
| design of the auxiliary switch | transverse |
| number of NC contacts for auxiliary contacts | 1 |
| number of NO contacts for auxiliary contacts | 1 |
| number of CO contacts for auxiliary contacts | 0 |
| operational current of auxiliary contacts at AC-15 | |
| • at 24 V | 2 A |
| • at 120 V | 0.5 A |
| • at 125 V | 0.5 A |
| • at 230 V | 0.5 A |
| operational current of auxiliary contacts at DC-13 | |
| • at 24 V | 1 A |
| • at 60 V | 0.15 A |
| Protective and monitoring functions | |
| product function | |
| • ground fault detection | No |
| • phase failure detection | Yes |
| trip class | CLASS 10 |
| design of the overload release | thermal |
| maximum short-circuit current breaking capacity (I_{cu}) | |
| • at AC at 240 V rated value | 100 kA |
| • at AC at 400 V rated value | 55 kA |
| • at AC at 500 V rated value | 10 kA |
| • at AC at 690 V rated value | 4 kA |
| operating short-circuit current breaking capacity (I_{cs}) at AC | |
| • at 240 V rated value | 100 kA |
| • at 400 V rated value | 25 kA |
| • at 500 V rated value | 5 kA |
| • at 690 V rated value | 2 kA |
| response value current of instantaneous short-circuit trip unit | 364 A |
| UL/CSA ratings | |
| full-load current (FLA) for 3-phase AC motor | |
| • at 480 V rated value | 28 A |
| • at 600 V rated value | 28 A |
| yielded mechanical performance [hp] | |
| • for single-phase AC motor | |
| — at 110/120 V rated value | 2 hp |
| — at 230 V rated value | 5 hp |
| • for 3-phase AC motor | |
| — at 200/208 V rated value | 7.5 hp |
| — at 220/230 V rated value | 10 hp |
| — at 460/480 V rated value | 20 hp |
| contact rating of auxiliary contacts according to UL | C300 / R300 |
| Short-circuit protection | |

| | |
|---|---|
| product function short circuit protection | Yes |
| design of the short-circuit trip | magnetic |
| design of the fuse link | |
| <ul style="list-style-type: none"> • for short-circuit protection of the auxiliary switch required | Fuse gL/gG: 10 A, miniature circuit breaker C 6 A (short-circuit current $I_k < 400$ A) |
| design of the fuse link for IT network for short-circuit protection of the main circuit | |
| <ul style="list-style-type: none"> • at 400 V | gL/gG 63 A |
| <ul style="list-style-type: none"> • at 500 V | gL/gG 63 A |
| <ul style="list-style-type: none"> • at 690 V | gL/gG 63 A |

Installation/ mounting/ dimensions

| | |
|--|--|
| mounting position | any |
| fastening method | screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 |
| height | 97 mm |
| width | 45 mm |
| depth | 97 mm |
| required spacing | |
| <ul style="list-style-type: none"> • with side-by-side mounting at the side | 0 mm |
| <ul style="list-style-type: none"> • for grounded parts at 400 V <ul style="list-style-type: none"> — downwards | 30 mm |
| <ul style="list-style-type: none"> <ul style="list-style-type: none"> — upwards | 30 mm |
| <ul style="list-style-type: none"> <ul style="list-style-type: none"> — at the side | 9 mm |
| <ul style="list-style-type: none"> • for live parts at 400 V <ul style="list-style-type: none"> — downwards | 30 mm |
| <ul style="list-style-type: none"> <ul style="list-style-type: none"> — upwards | 30 mm |
| <ul style="list-style-type: none"> <ul style="list-style-type: none"> — at the side | 9 mm |
| <ul style="list-style-type: none"> • for grounded parts at 500 V <ul style="list-style-type: none"> — downwards | 30 mm |
| <ul style="list-style-type: none"> <ul style="list-style-type: none"> — upwards | 30 mm |
| <ul style="list-style-type: none"> <ul style="list-style-type: none"> — at the side | 9 mm |
| <ul style="list-style-type: none"> • for live parts at 500 V <ul style="list-style-type: none"> — downwards | 30 mm |
| <ul style="list-style-type: none"> <ul style="list-style-type: none"> — upwards | 30 mm |
| <ul style="list-style-type: none"> <ul style="list-style-type: none"> — at the side | 9 mm |
| <ul style="list-style-type: none"> • for grounded parts at 690 V <ul style="list-style-type: none"> — downwards | 50 mm |
| <ul style="list-style-type: none"> <ul style="list-style-type: none"> — upwards | 50 mm |
| <ul style="list-style-type: none"> <ul style="list-style-type: none"> — backwards | 0 mm |
| <ul style="list-style-type: none"> <ul style="list-style-type: none"> — at the side | 30 mm |
| <ul style="list-style-type: none"> <ul style="list-style-type: none"> — forwards | 0 mm |
| <ul style="list-style-type: none"> • for live parts at 690 V <ul style="list-style-type: none"> — downwards | 50 mm |
| <ul style="list-style-type: none"> <ul style="list-style-type: none"> — upwards | 50 mm |
| <ul style="list-style-type: none"> <ul style="list-style-type: none"> — backwards | 0 mm |
| <ul style="list-style-type: none"> <ul style="list-style-type: none"> — at the side | 30 mm |
| <ul style="list-style-type: none"> <ul style="list-style-type: none"> — forwards | 0 mm |

Connections/ Terminals

| | |
|---|---|
| type of electrical connection | |
| <ul style="list-style-type: none"> • for main current circuit | screw-type terminals |
| <ul style="list-style-type: none"> • for auxiliary and control circuit | screw-type terminals |
| arrangement of electrical connectors for main current circuit | Top and bottom |
| type of connectable conductor cross-sections | |
| <ul style="list-style-type: none"> • for main contacts <ul style="list-style-type: none"> — solid or stranded | 2x (1 ... 2.5 mm ²), 2x (2.5 ... 10 mm ²) |
| <ul style="list-style-type: none"> <ul style="list-style-type: none"> — finely stranded with core end processing | 2x (1 ... 2.5 mm ²), 2x (2.5 ... 6 mm ²), 1x 10 mm ² |
| <ul style="list-style-type: none"> • at AWG cables for main contacts | 2x (16 ... 12), 2x (14 ... 8) |
| type of connectable conductor cross-sections | |
| <ul style="list-style-type: none"> • for auxiliary contacts <ul style="list-style-type: none"> — solid or stranded | 2x (0.5 ... 1.5 mm ²), 2x (0.75 ... 2.5 mm ²) |
| <ul style="list-style-type: none"> <ul style="list-style-type: none"> — finely stranded with core end processing | 2x (0.5 ... 1.5 mm ²), 2x (0.75 ... 2.5 mm ²) |
| <ul style="list-style-type: none"> • at AWG cables for auxiliary contacts | 2x (20 ... 16), 2x (18 ... 14) |
| tightening torque | |

- for main contacts with screw-type terminals
- for auxiliary contacts with screw-type terminals

design of screwdriver shaft

size of the screwdriver tip

design of the thread of the connection screw

- for main contacts
- of the auxiliary and control contacts

2 ... 2.5 N·m
0.8 ... 1.2 N·m
Diameter 5 to 6 mm
Pozidriv size 2

M4
M3

Safety related data

B10 value

- with high demand rate according to SN 31920

5 000

proportion of dangerous failures

- with low demand rate according to SN 31920
- with high demand rate according to SN 31920

50 %
50 %

failure rate [FIT]

- with low demand rate according to SN 31920

50 FIT

T1 value for proof test interval or service life according to IEC 61508

10 a

protection class IP on the front according to IEC 60529

IP20

touch protection on the front according to IEC 60529
display version for switching status

finger-safe, for vertical contact from the front
Handle

Certificates/ approvals

General Product Approval

For use in hazard-
ous locations

[Confirmation](#)



[KC](#)



For use in hazard-
ous locations

Declaration of Conformity

Test Certificates

Marine / Shipping



[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)



Marine / Shipping



other

Railway

[Confirmation](#)



[Vibration and Shock](#)

[Confirmation](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2021-4NA15>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2021-4NA15>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RV2021-4NA15>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2021-4NA15&lang=en



Characteristic: Tripping characteristics, I^2t , Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RV2021-4NA15/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2021-4NA15&objecttype=14&gridview=view1>

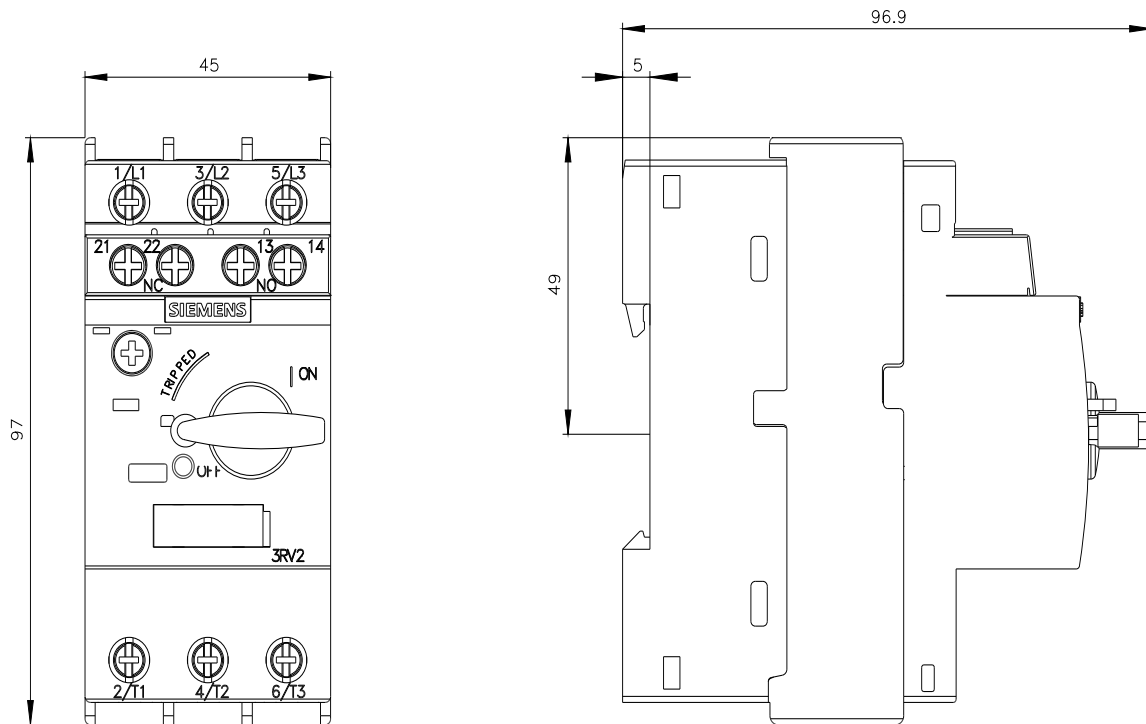

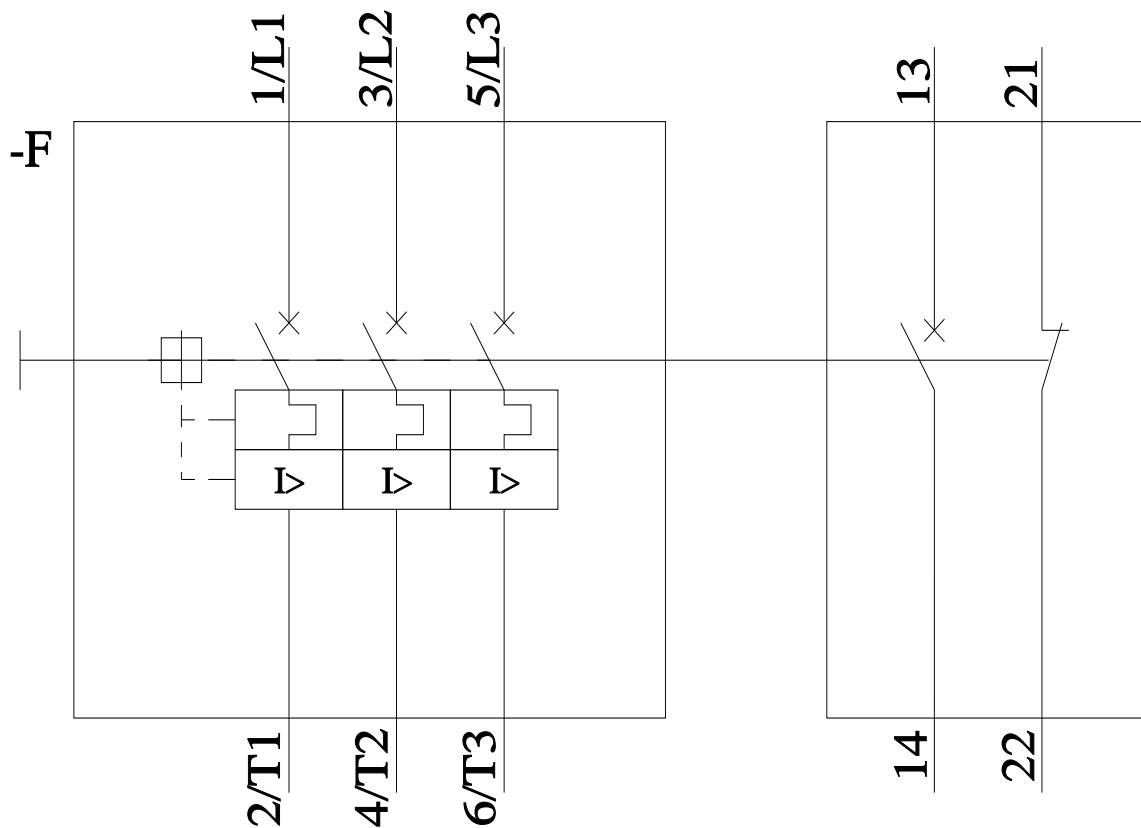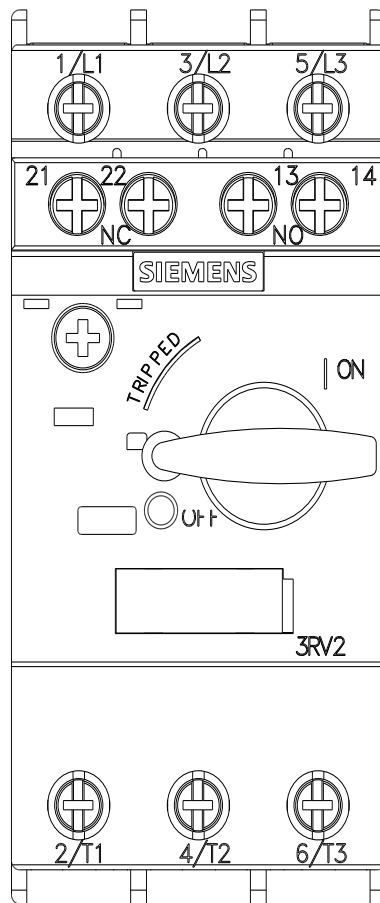

last modified:

11/21/2022