



Circuit breaker size S00 for starter combination Rated current 2 A N-release 26 A screw terminal Standard switching capacity

|                          |                          |
|--------------------------|--------------------------|
| product brand name       | SIRIUS                   |
| product designation      | Circuit breaker          |
| design of the product    | For starter combinations |
| product type designation | 3RV2                     |

### General technical data

|                                                                 |             |
|-----------------------------------------------------------------|-------------|
| size of the circuit-breaker                                     | S00         |
| size of contactor can be combined company-specific              | S00, S0     |
| product extension auxiliary switch                              | Yes         |
| power loss [W] for rated value of the current                   |             |
| • at AC in hot operating state                                  | 7.25 W      |
| • at AC in hot operating state per pole                         | 2.4 W       |
| insulation voltage with degree of pollution 3 at AC rated value | 690 V       |
| surge voltage resistance rated value                            | 6 kV        |
| shock resistance according to IEC 60068-2-27                    | 25g / 11 ms |
| mechanical service life (operating cycles)                      |             |
| • of the main contacts typical                                  | 100 000     |
| • of auxiliary contacts typical                                 | 100 000     |
| electrical endurance (operating cycles) typical                 | 100 000     |
| reference code according to IEC 81346-2                         | Q           |
| Substance Prohibitance (Date)                                   | 10/01/2009  |

### Ambient conditions

|                                                         |                |
|---------------------------------------------------------|----------------|
| installation altitude at height above sea level maximum | 2 000 m        |
| ambient temperature                                     |                |
| • during operation                                      | -20 ... +60 °C |
| • during storage                                        | -50 ... +80 °C |
| • during transport                                      | -50 ... +80 °C |
| relative humidity during operation                      | 10 ... 95 %    |

### Main circuit

|                                          |              |
|------------------------------------------|--------------|
| number of poles for main current circuit | 3            |
| operating voltage                        |              |
| • rated value                            | 20 ... 690 V |
| • at AC-3 rated value maximum            | 690 V        |
| • at AC-3e rated value maximum           | 690 V        |
| operating frequency rated value          | 50 ... 60 Hz |
| operational current rated value          | 2 A          |
| operational current                      |              |
| • at AC-3 at 400 V rated value           | 2 A          |
| • at AC-3e at 400 V rated value          | 2 A          |
| operating power                          |              |
| • at AC-3                                |              |
| — at 230 V rated value                   | 0.4 kW       |

|                                                                                                                                                                                                                                                                                                                                        |                                                                          |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>— at 400 V rated value</li> <li>— at 500 V rated value</li> <li>— at 690 V rated value</li> <li>• at AC-3e <ul style="list-style-type: none"> <li>— at 230 V rated value</li> <li>— at 400 V rated value</li> <li>— at 500 V rated value</li> <li>— at 690 V rated value</li> </ul> </li> </ul> | 0.8 kW<br>0.8 kW<br>1.1 kW<br><br>0.4 kW<br>0.8 kW<br>0.8 kW<br>1.1 kW   |
| <b>operating frequency</b>                                                                                                                                                                                                                                                                                                             |                                                                          |
| <ul style="list-style-type: none"> <li>• at AC-3 maximum</li> <li>• at AC-3e maximum</li> </ul>                                                                                                                                                                                                                                        | 15 1/h<br>15 1/h                                                         |
| <b>Auxiliary circuit</b>                                                                                                                                                                                                                                                                                                               |                                                                          |
| <b>number of NC contacts for auxiliary contacts</b>                                                                                                                                                                                                                                                                                    | 0                                                                        |
| <b>number of NO contacts for auxiliary contacts</b>                                                                                                                                                                                                                                                                                    | 0                                                                        |
| number of CO contacts for auxiliary contacts                                                                                                                                                                                                                                                                                           | 0                                                                        |
| <b>Protective and monitoring functions</b>                                                                                                                                                                                                                                                                                             |                                                                          |
| <b>product function</b>                                                                                                                                                                                                                                                                                                                |                                                                          |
| <ul style="list-style-type: none"> <li>• ground fault detection</li> <li>• phase failure detection</li> </ul>                                                                                                                                                                                                                          | No<br>No                                                                 |
| <b>maximum short-circuit current breaking capacity (I<sub>cu</sub>)</b>                                                                                                                                                                                                                                                                |                                                                          |
| <ul style="list-style-type: none"> <li>• at AC at 240 V rated value</li> <li>• at AC at 400 V rated value</li> <li>• at AC at 500 V rated value</li> <li>• at AC at 690 V rated value</li> </ul>                                                                                                                                       | 100 kA<br>100 kA<br>100 kA<br>10 kA                                      |
| <b>operating short-circuit current breaking capacity (I<sub>cs</sub>) at AC</b>                                                                                                                                                                                                                                                        |                                                                          |
| <ul style="list-style-type: none"> <li>• at 240 V rated value</li> <li>• at 400 V rated value</li> <li>• at 500 V rated value</li> <li>• at 690 V rated value</li> </ul>                                                                                                                                                               | 100 kA<br>100 kA<br>100 kA<br>10 kA                                      |
| response value current of instantaneous short-circuit trip unit                                                                                                                                                                                                                                                                        | 26 A                                                                     |
| <b>UL/CSA ratings</b>                                                                                                                                                                                                                                                                                                                  |                                                                          |
| <b>full-load current (FLA) for 3-phase AC motor</b>                                                                                                                                                                                                                                                                                    |                                                                          |
| <ul style="list-style-type: none"> <li>• at 480 V rated value</li> <li>• at 600 V rated value</li> </ul>                                                                                                                                                                                                                               | 2 A<br>2 A                                                               |
| <b>yielded mechanical performance [hp]</b>                                                                                                                                                                                                                                                                                             |                                                                          |
| <ul style="list-style-type: none"> <li>• for single-phase AC motor <ul style="list-style-type: none"> <li>— at 230 V rated value</li> </ul> </li> <li>• for 3-phase AC motor <ul style="list-style-type: none"> <li>— at 460/480 V rated value</li> <li>— at 575/600 V rated value</li> </ul> </li> </ul>                              | 0.13 hp<br><br>1 hp<br>1 hp                                              |
| <b>Short-circuit protection</b>                                                                                                                                                                                                                                                                                                        |                                                                          |
| <b>product function short circuit protection</b>                                                                                                                                                                                                                                                                                       | Yes                                                                      |
| <b>design of the short-circuit trip</b>                                                                                                                                                                                                                                                                                                | magnetic                                                                 |
| <b>design of the fuse link for IT network for short-circuit protection of the main circuit</b>                                                                                                                                                                                                                                         |                                                                          |
| <ul style="list-style-type: none"> <li>• at 400 V</li> <li>• at 500 V</li> <li>• at 690 V</li> </ul>                                                                                                                                                                                                                                   | gL/gG 25 A<br>gL/gG 25 A<br>gL/gG 20 A                                   |
| <b>Installation/ mounting/ dimensions</b>                                                                                                                                                                                                                                                                                              |                                                                          |
| <b>mounting position</b>                                                                                                                                                                                                                                                                                                               | any                                                                      |
| <b>fastening method</b>                                                                                                                                                                                                                                                                                                                | screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 |
| <b>height</b>                                                                                                                                                                                                                                                                                                                          | 97 mm                                                                    |
| <b>width</b>                                                                                                                                                                                                                                                                                                                           | 45 mm                                                                    |
| <b>depth</b>                                                                                                                                                                                                                                                                                                                           | 97 mm                                                                    |
| <b>required spacing</b>                                                                                                                                                                                                                                                                                                                |                                                                          |
| <ul style="list-style-type: none"> <li>• with side-by-side mounting at the side</li> <li>• for grounded parts at 400 V <ul style="list-style-type: none"> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> </ul> </li> </ul>                                                                                             | 0 mm<br><br>30 mm<br>30 mm<br>9 mm                                       |

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                                                                                                                                  |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>• for live parts at 400 V <ul style="list-style-type: none"> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> </ul> </li> <li>• for grounded parts at 500 V <ul style="list-style-type: none"> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> </ul> </li> <li>• for live parts at 500 V <ul style="list-style-type: none"> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> </ul> </li> <li>• for grounded parts at 690 V <ul style="list-style-type: none"> <li>— downwards</li> <li>— upwards</li> <li>— backwards</li> <li>— at the side</li> <li>— forwards</li> </ul> </li> <li>• for live parts at 690 V <ul style="list-style-type: none"> <li>— downwards</li> <li>— upwards</li> <li>— backwards</li> <li>— at the side</li> <li>— forwards</li> </ul> </li> </ul> | 30 mm<br>30 mm<br>9 mm<br><br>30 mm<br>30 mm<br>9 mm<br><br>30 mm<br>30 mm<br>9 mm<br><br>50 mm<br>50 mm<br>0 mm<br>30 mm<br>0 mm<br><br>50 mm<br>50 mm<br>0 mm<br>30 mm<br>0 mm |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

#### Connections/ Terminals

##### type of electrical connection

- for main current circuit

screw-type terminals  
Top and bottom

##### arrangement of electrical connectors for main current circuit

##### type of connectable conductor cross-sections

- for main contacts
  - solid or stranded
  - finely stranded with core end processing
- at AWG cables for main contacts

2x (0,75 ... 2,5 mm<sup>2</sup>), 2x 4 mm<sup>2</sup>  
2x (0,5 ... 1,5 mm<sup>2</sup>), 2x (0,75 ... 2,5 mm<sup>2</sup>)  
2x (18 ... 14), 2x 12

##### tightening torque

- for main contacts with screw-type terminals

0,8 ... 1,2 N·m

##### design of screwdriver shaft

Diameter 5 to 6 mm

##### size of the screwdriver tip

Pozidriv size 2

##### design of the thread of the connection screw

- for main contacts

M3

#### Safety related data

##### B10 value

- with high demand rate according to SN 31920

5 000

##### proportion of dangerous failures

- with low demand rate according to SN 31920
- with high demand rate according to SN 31920

50 %  
50 %

##### failure rate [FIT]

- with low demand rate according to SN 31920

50 FIT

T1 value for proof test interval or service life according to IEC 61508

10 a

##### protection class IP on the front according to IEC 60529

IP20

touch protection on the front according to IEC 60529  
display version for switching status

finger-safe, for vertical contact from the front  
Handle

#### Certificates/ approvals

##### General Product Approval

##### Declaration of Conformity

[Confirmation](#)



| Test Certificates | Marine / Shipping |
|-------------------|-------------------|
|-------------------|-------------------|

[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)



| Marine / Shipping | other | Railway |
|-------------------|-------|---------|
|-------------------|-------|---------|



[Confirmation](#)



[Confirmation](#)

| Railway |
|---------|
|---------|

[Vibration and Shock](#)

| Further information |
|---------------------|
|---------------------|

**Information on the packaging**

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<https://www.siemens.com/ic10>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2311-1BC10>

**Cax online generator**

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2311-1BC10>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3RV2311-1BC10>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**



[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RV2311-1BC10&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2311-1BC10&lang=en)


**Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current**

<https://support.industry.siemens.com/cs/ww/en/ps/3RV2311-1BC10/char>

**Further characteristics (e.g. electrical endurance, switching frequency)**

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2311-1BC10&objecttype=14&gridview=view1>

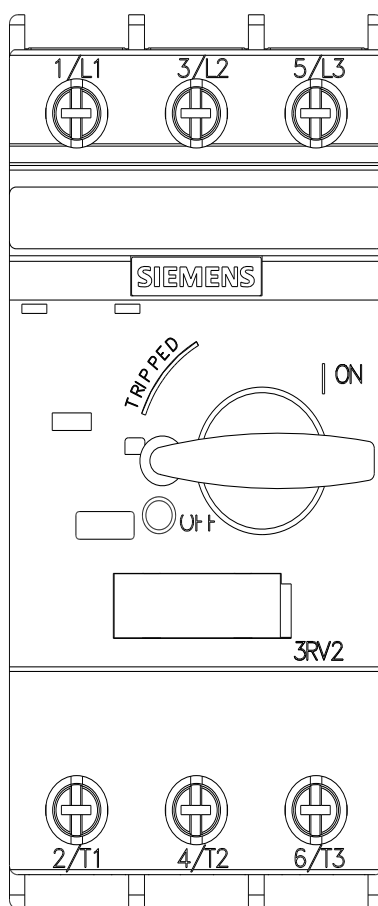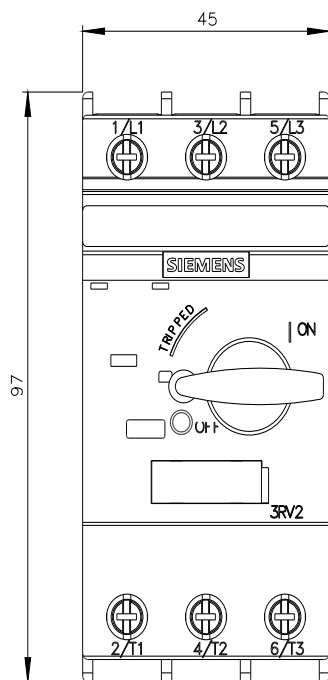

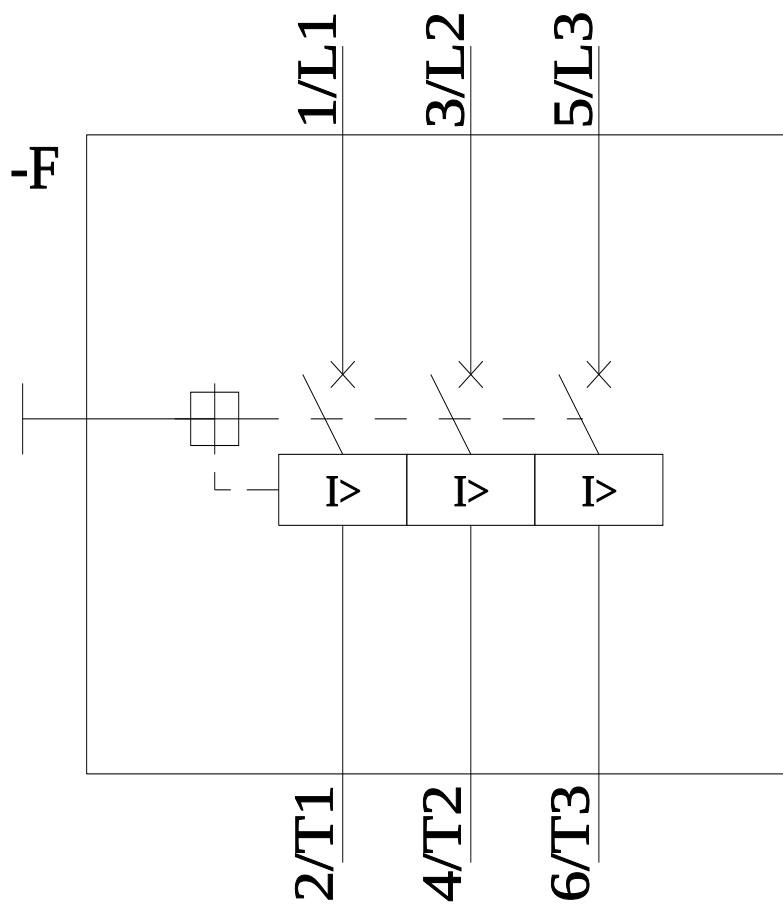

last modified:

11/21/2022 [↗](#)