

Product data sheet 3RV2902-4AV0

UNDERVOLTAGE RELEASE, AC 400V/50HZ, AC 440V/60HZ WITH RING CABLE LUG CONNECTION, FOR CIRCUIT-BREAKERS, SZ S00/S0

Product brand name  Product designation  undervoltage release  Size of the circuit-breaker  Soo, So  Acceptability for application  Protection class IP / frontal/front side  Pesign of the short-circuit protection  Degree of pollution  Insulation voltage / rated value  Insulation voltage / with degree of pollution 3 / rated value  • during storage  SIRIUS  undervoltage release  Soo, So  Inoutor circuit breaker  IP20  Fuse  IP20  Fuse  Fuse				
Size of the circuit-breaker  Acceptability for application  Protection class IP / frontal/front side  Design of the short-circuit protection  Degree of pollution  Insulation voltage / rated value  Insulation voltage / with degree of pollution 3 / rated value  Ambient temperature				
Acceptability for application motor circuit breaker  Protection class IP / frontal/front side IP20  Design of the short-circuit protection fuse  Degree of pollution 3  Insulation voltage / rated value V 690  Insulation voltage / with degree of pollution 3 / rated value V 690  Ambient temperature				
Protection class IP / frontal/front side  Design of the short-circuit protection  Degree of pollution  Insulation voltage / rated value  Insulation voltage / with degree of pollution 3 / rated value  Ambient temperature				
Design of the short-circuit protection  Degree of pollution  Insulation voltage / rated value  V 690  Insulation voltage / with degree of pollution 3 / rated value  V 690  Ambient temperature				
Degree of pollution  Insulation voltage / rated value  V 690  Insulation voltage / with degree of pollution 3 / rated value  V 690  Ambient temperature				
Insulation voltage / rated value  V 690  Insulation voltage / with degree of pollution 3 / rated value  V 690  Ambient temperature				
Insulation voltage / with degree of pollution 3 / rated value V 690  Ambient temperature				
Ambient temperature				
• during storage °C -50 80				
• during the operating phase °C -20 60				
Item designation				
according to DIN 40719 extendable after IEC 204-2 / according     to IEC 750      F				
• according to DIN EN 61346-2				
Auxiliary circuit:				
Number of NC contacts / for auxiliary contacts				
• instantaneous switching 0				
Number of NO contacts / for auxiliary contacts				
• instantaneous switching 0				
Number of changeover contacts / of the auxiliary contacts				
• non-delayed 0				
Control circuit:				
Type of voltage / of the controlled supply voltage AC				
control supply voltage frequency				
• 1 / initial rated value Hz 50				
• 1 / final rated value Hz 60				
Control supply voltage				
• 1 / at 50 Hz / for AC / rated value V 400				

V 440

Installation/mounting/dimensions:		
Type of fixing/fixation		snap-on mounting
Width	mm	18.5
Height	mm	90
Depth	mm	68

Certificates/	approvals:
---------------	------------

verification of suitability CE / UL / CSA / CCC

## **Further information:**

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/industrial-controls/catalogs

Global Industry Mall (Online ordering system)


http://www.siemens.com/industrial-controls/mall


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

http://support.automation.siemens.com/WW/view/en/3RV2902-4AV0/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax\_en.aspx?mlfb=3RV2902-4AV0

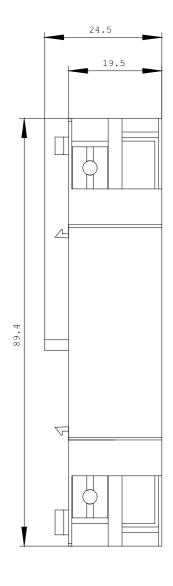

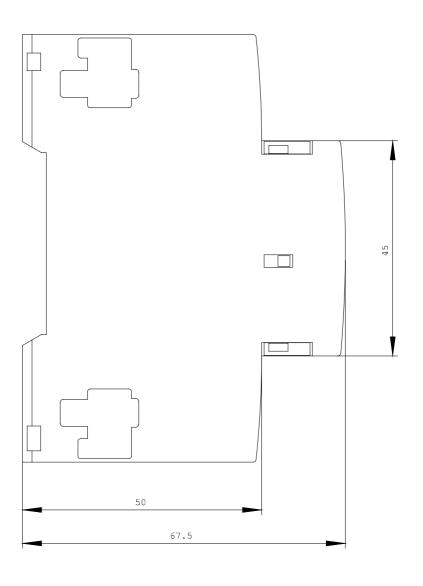



last change: Apr 26, 2010