



Extension connector for connection of 3-phase busbars
3RV2917

General technical data		
product brand name		SIRIUS
product designation		Expansion plug
design of the product		as spare part
size of the circuit-breaker		S0
protection class IP on the front according to IEC 60529		IP20
touch protection on the front according to IEC 60529		finger-safe, for vertical contact from the front
ambient temperature		
• during storage	°C	-50 ... +80
• during operation	°C	-20 ... +60
ampacity maximum	A	63
Installation/ mounting/ dimensions		
width	mm	23.2
height	mm	41.7
depth	mm	26.8
Certificates/ approvals		
certificate of suitability		CE / UL / CSA / CCC
General Product Approval		Test Certificates
		Marine / Shipping
	Confirmation	
		
	Special Test Certificate	
Marine / Shipping		
		
		
		
		
other		Railway
Confirmation	Environmental Confirmations	Vibration and Shock
		

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2917-5BA00>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2917-5BA00>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RV2917-5BA00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2917-5BA00&lang=en

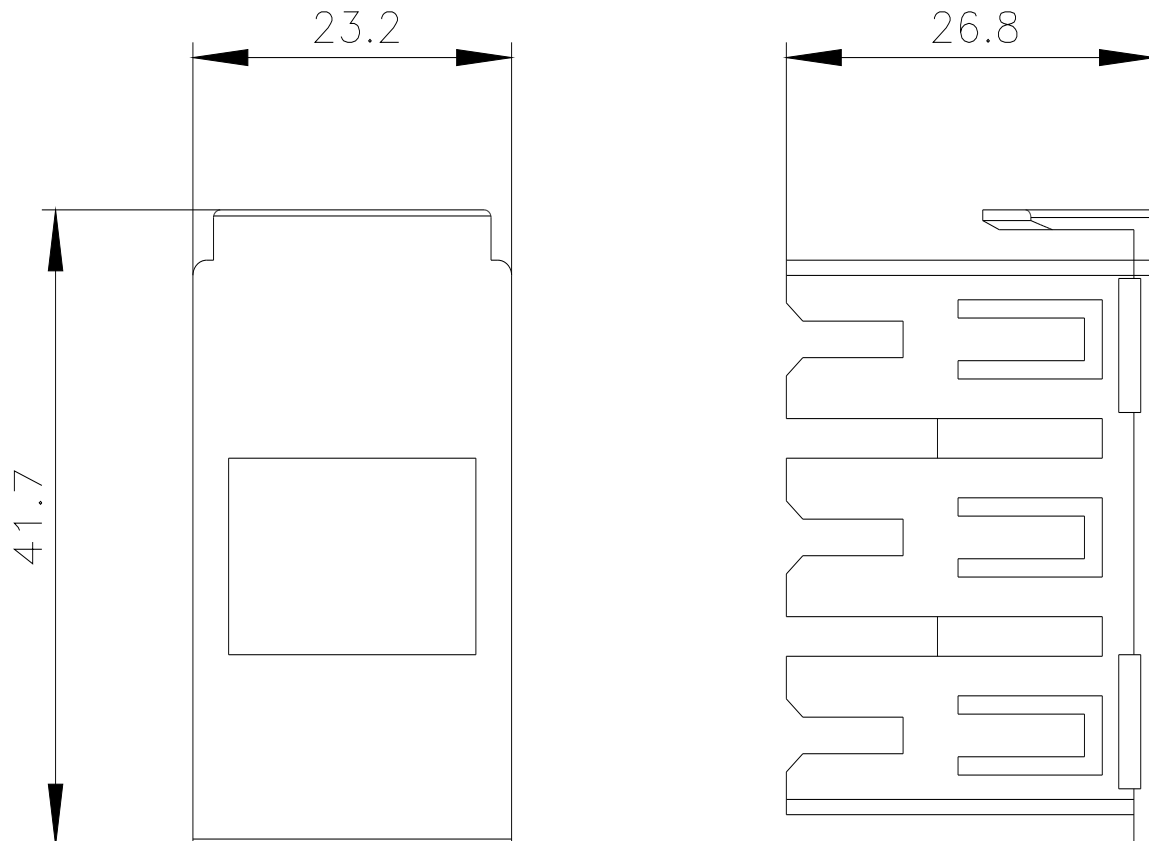

last modified:

12/15/2020 