


Terminal block Device infeed



General technical data		
product brand name		SIRIUS
product designation		Terminal block
design of the product		for power outlet
size of the circuit-breaker		S00, S0
protection class IP on the front according to IEC 60529		IP20
touch protection on the front according to IEC 60529		finger-safe, for vertical contact from the front
insulation voltage with degree of pollution 3 at AC rated value	V	500
ambient temperature		
• during storage	°C	-50 ... +80
• during operation	°C	-20 ... +60
ampacity maximum	A	32
Installation/ mounting/ dimensions		
width	mm	26
height	mm	25
depth	mm	60
Connections/ Terminals		
type of electrical connection for main current circuit		spring-loaded terminals
type of connectable conductor cross-sections		
• for main contacts		
— solid		1x (1 ... 10 mm²)
— stranded		1x (1 ... 10 mm²)
— finely stranded		
— with core end processing		1x (1 ... 6 mm²)
• at AWG cables for main contacts		1x (18 ... 8)
Certificates/ approvals		
certificate of suitability		CE / UL / CSA / CCC
General Product Approval		Declaration of Conformity

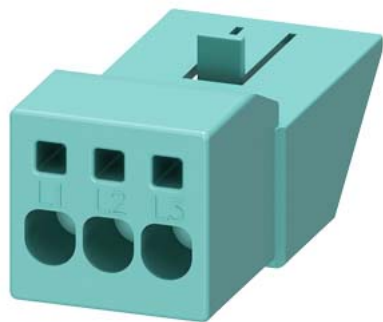

[Confirmation](#)



Test Certificates	Marine / Shipping	other
-------------------	-------------------	-------

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2917-5FA00>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2917-5FA00>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RV2917-5FA00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2917-5FA00&lang=en

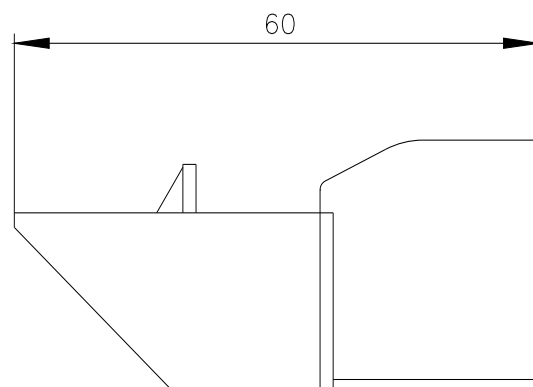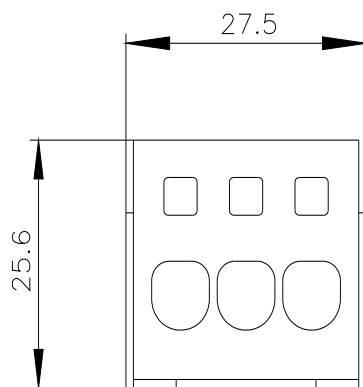

last modified:

12/15/2020 