


Phase barriers Increased air clearances / creepage distances for 3RV2 size S00/S0 with screw terminal



General technical data		
product brand name		SIRIUS
product designation		phase barrier
design of the product		phase barrier for 3RV2
ambient temperature		
• during operation	°C	-20 ... +70
• during storage	°C	-50 ... +80
Installation/ mounting/ dimensions		
fastening method		clip-on
width	mm	44.8
height	mm	29.3
depth	mm	60.6
Certificates/ approvals		
certificate of suitability		CE / UL / CSA / CCC
General Product Approval		Declaration of Conformity

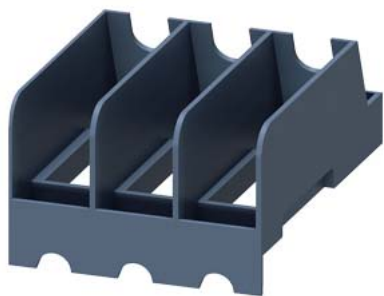

[Confirmation](#)



Test Certificates	Marine / Shipping
Type Test Certificates/Test Report	Special Test Certificate
	   

Marine / Shipping	other	Railway
  	Confirmation 	Vibration and Shock

Further information
Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2928-1K>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2928-1K>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RV2928-1K>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2928-1K&lang=en

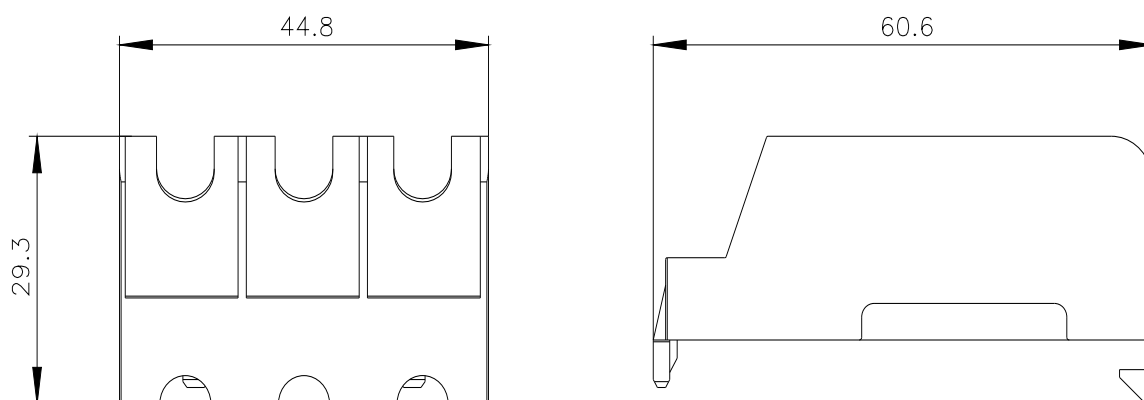

last modified:

1/6/2021 