



SIRIUS soft starter S2 63 A, 30 kW/400 V, 40 °C 200-480 V AC, 110-230 V AC/DC Screw terminals

### General technical data

|                                                                                                   |   |                          |
|---------------------------------------------------------------------------------------------------|---|--------------------------|
| <b>product brand name</b>                                                                         |   | SIRIUS                   |
| <b>product feature</b>                                                                            |   |                          |
| • integrated bypass contact system                                                                |   | Yes                      |
| • thyristors                                                                                      |   | Yes                      |
| <b>product function</b>                                                                           |   |                          |
| • intrinsic device protection                                                                     |   | No                       |
| • motor overload protection                                                                       |   | No                       |
| • evaluation of thermistor motor protection                                                       |   | No                       |
| • external reset                                                                                  |   | No                       |
| • adjustable current limitation                                                                   |   | No                       |
| • inside-delta circuit                                                                            |   | No                       |
| <b>product component motor brake output</b>                                                       |   | No                       |
| <b>insulation voltage rated value</b>                                                             | V | 600                      |
| <b>degree of pollution</b>                                                                        |   | 3, acc. to IEC 60947-4-2 |
| <b>reference code according to EN 61346-2</b>                                                     |   | Q                        |
| <b>reference code according to DIN 40719 extended according to IEC 204-2 according to IEC 750</b> |   | G                        |

### Power Electronics

|                                                                                                                       |    |              |
|-----------------------------------------------------------------------------------------------------------------------|----|--------------|
| <b>product designation</b>                                                                                            |    | Soft starter |
| <b>operational current</b>                                                                                            |    |              |
| • at 40 °C rated value                                                                                                | A  | 63           |
| • at 50 °C rated value                                                                                                | A  | 58           |
| • at 60 °C rated value                                                                                                | A  | 53           |
| <b>yielded mechanical performance for 3-phase motors</b>                                                              |    |              |
| • at 230 V                                                                                                            |    |              |
| — at standard circuit at 40 °C rated value                                                                            | kW | 18.5         |
| • at 400 V                                                                                                            |    |              |
| — at standard circuit at 40 °C rated value                                                                            | kW | 30           |
| <b>yielded mechanical performance [hp] for 3-phase AC motor at 200/208 V at standard circuit at 50 °C rated value</b> | hp | 15           |
| <b>operating frequency rated value</b>                                                                                | Hz | 50 ... 60    |
| <b>relative negative tolerance of the operating frequency</b>                                                         | %  | -10          |
| <b>relative positive tolerance of the operating frequency</b>                                                         | %  | 10           |
| <b>operating voltage at standard circuit rated value</b>                                                              | V  | 200 ... 480  |
| <b>relative negative tolerance of the operating voltage at standard circuit</b>                                       | %  | -15          |
| <b>relative positive tolerance of the operating voltage at standard circuit</b>                                       | %  | 10           |
| <b>minimum load [%]</b>                                                                                               | %  | 10           |
| <b>continuous operating current [% of I<sub>e</sub>] at 40 °C</b>                                                     | %  | 115          |
| <b>power loss [W] at operational current at 40 °C during</b>                                                          | W  | 12           |

|                                                                                                                |    |                                                                                                                        |
|----------------------------------------------------------------------------------------------------------------|----|------------------------------------------------------------------------------------------------------------------------|
| operation typical                                                                                              |    |                                                                                                                        |
| <b>Control circuit/ Control</b>                                                                                |    |                                                                                                                        |
| type of voltage of the control supply voltage                                                                  |    | AC/DC                                                                                                                  |
| control supply voltage frequency 1 rated value                                                                 | Hz | 50                                                                                                                     |
| control supply voltage frequency 2 rated value                                                                 | Hz | 60                                                                                                                     |
| relative negative tolerance of the control supply voltage frequency                                            | %  | -10                                                                                                                    |
| relative positive tolerance of the control supply voltage frequency                                            | %  | 10                                                                                                                     |
| control supply voltage 1 at AC at 50 Hz                                                                        | V  | 110 ... 230                                                                                                            |
| control supply voltage 1 at AC at 60 Hz                                                                        | V  | 110 ... 230                                                                                                            |
| relative negative tolerance of the control supply voltage at AC at 50 Hz                                       | %  | -10                                                                                                                    |
| relative positive tolerance of the control supply voltage at AC at 50 Hz                                       | %  | 10                                                                                                                     |
| relative negative tolerance of the control supply voltage at AC at 60 Hz                                       | %  | -10                                                                                                                    |
| relative positive tolerance of the control supply voltage at AC at 60 Hz                                       | %  | 10                                                                                                                     |
| control supply voltage 1 at DC                                                                                 | V  | 110 ... 230                                                                                                            |
| relative negative tolerance of the control supply voltage at DC                                                | %  | -10                                                                                                                    |
| relative positive tolerance of the control supply voltage at DC                                                | %  | 10                                                                                                                     |
| display version for fault signal                                                                               |    | red                                                                                                                    |
| <b>Mechanical data</b>                                                                                         |    |                                                                                                                        |
| size of engine control device                                                                                  |    | S2                                                                                                                     |
| width                                                                                                          | mm | 55                                                                                                                     |
| height                                                                                                         | mm | 160                                                                                                                    |
| depth                                                                                                          | mm | 170                                                                                                                    |
| fastening method                                                                                               |    | screw and snap-on mounting                                                                                             |
| mounting position                                                                                              |    | With vertical mounting surface +/-10° rotatable, with vertical mounting surface +/- 10° tiltable to the front and back |
| required spacing with side-by-side mounting                                                                    |    |                                                                                                                        |
| • upwards                                                                                                      | mm | 60                                                                                                                     |
| • at the side                                                                                                  | mm | 30                                                                                                                     |
| • downwards                                                                                                    | mm | 40                                                                                                                     |
| wire length maximum                                                                                            | m  | 300                                                                                                                    |
| number of poles for main current circuit                                                                       |    | 3                                                                                                                      |
| <b>Connections/ Terminals</b>                                                                                  |    |                                                                                                                        |
| type of electrical connection                                                                                  |    |                                                                                                                        |
| • for main current circuit                                                                                     |    | screw-type terminals                                                                                                   |
| • for auxiliary and control circuit                                                                            |    | screw-type terminals                                                                                                   |
| number of NC contacts for auxiliary contacts                                                                   |    | 0                                                                                                                      |
| number of NO contacts for auxiliary contacts                                                                   |    | 1                                                                                                                      |
| number of CO contacts for auxiliary contacts                                                                   |    | 0                                                                                                                      |
| type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point |    |                                                                                                                        |
| • solid                                                                                                        |    | 2x (1.5 ... 16 mm²)                                                                                                    |
| • finely stranded with core end processing                                                                     |    | 1.5 ... 25 mm²                                                                                                         |
| • stranded                                                                                                     |    | 1.5 ... 35 mm²                                                                                                         |
| type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point  |    |                                                                                                                        |
| • solid                                                                                                        |    | 2x (1.5 ... 16 mm²)                                                                                                    |
| • finely stranded with core end processing                                                                     |    | 1.5 ... 25 mm²                                                                                                         |
| • stranded                                                                                                     |    | 1.5 ... 35 mm²                                                                                                         |
| type of connectable conductor cross-sections for main contacts for box terminal using both clamping points     |    |                                                                                                                        |
| • solid                                                                                                        |    | 2x (1.5 ... 16 mm²)                                                                                                    |
| • finely stranded with core end processing                                                                     |    | 2x (1.5 ... 16 mm²)                                                                                                    |
| • stranded                                                                                                     |    | 2x (1.5 ... 25 mm²)                                                                                                    |
| type of connectable conductor cross-sections at AWG                                                            |    |                                                                                                                        |

|                                                                                                                                                                                                                         |  |                                                                        |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|------------------------------------------------------------------------|
| <b>cables for main contacts for box terminal</b> <ul style="list-style-type: none"> <li>• using the back clamping point</li> <li>• using the front clamping point</li> <li>• using both clamping points</li> </ul>      |  | 16 ... 2<br>18 ... 2<br>2x (16 ... 2)                                  |
| <b>type of connectable conductor cross-sections for auxiliary contacts</b> <ul style="list-style-type: none"> <li>• solid</li> <li>• finely stranded with core end processing</li> </ul>                                |  | 2x (0.5 ... 2.5 mm <sup>2</sup> )<br>2x (0.5 ... 1.5 mm <sup>2</sup> ) |
| <b>type of connectable conductor cross-sections at AWG cables</b> <ul style="list-style-type: none"> <li>• for auxiliary contacts</li> <li>• for auxiliary contacts finely stranded with core end processing</li> </ul> |  | 2x (20 ... 14)<br>2x (20 ... 16)                                       |

#### Ambient conditions

|                                                                                                                                                                                                                                                                                         |    |                                                                                                                                                                                                                                                                                         |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>installation altitude at height above sea level</b><br><b>environmental category</b> <ul style="list-style-type: none"> <li>• during transport according to IEC 60721</li> <li>• during storage according to IEC 60721</li> <li>• during operation according to IEC 60721</li> </ul> | m  | 5 000<br><br>2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)<br>1K6 (only occasional condensation), 1C2 (no salt mist),<br>1S2 (sand must not get inside the devices), 1M4<br>3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6 |
| <b>ambient temperature</b> <ul style="list-style-type: none"> <li>• during operation</li> <li>• during storage</li> </ul>                                                                                                                                                               | °C | -25 ... +60                                                                                                                                                                                                                                                                             |
| <b>derating temperature</b>                                                                                                                                                                                                                                                             | °C | -40 ... +80                                                                                                                                                                                                                                                                             |
| <b>protection class IP on the front according to IEC 60529</b>                                                                                                                                                                                                                          | °C | 40                                                                                                                                                                                                                                                                                      |
| <b>touch protection on the front according to IEC 60529</b>                                                                                                                                                                                                                             |    | IP20                                                                                                                                                                                                                                                                                    |
|                                                                                                                                                                                                                                                                                         |    | finger-safe, for vertical contact from the front                                                                                                                                                                                                                                        |

#### Certificates/ approvals

|                          |     |
|--------------------------|-----|
| General Product Approval | EMC |
|--------------------------|-----|



[Confirmation](#)



| Declaration of Conformity | Test Certificates | other | Railway |
|---------------------------|-------------------|-------|---------|
|---------------------------|-------------------|-------|---------|



[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)

[Miscellaneous](#)

[Confirmation](#)

[Confirmation](#)

|         |
|---------|
| Railway |
|---------|

[Vibration and Shock](#)

#### UL/CSA ratings

|                                                                                                                                                                                                                                                                                                                                                      |    |             |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|-------------|
| <b>yielded mechanical performance [hp] for 3-phase AC motor</b> <ul style="list-style-type: none"> <li>• at 220/230 V <ul style="list-style-type: none"> <li>— at standard circuit at 50 °C rated value</li> </ul> </li> <li>• at 460/480 V <ul style="list-style-type: none"> <li>— at standard circuit at 50 °C rated value</li> </ul> </li> </ul> | hp | 20          |
| <b>contact rating of auxiliary contacts according to UL</b>                                                                                                                                                                                                                                                                                          | hp | 40          |
|                                                                                                                                                                                                                                                                                                                                                      |    | B300 / R300 |

#### Further information

**Simulation Tool for Soft Starters (STS)**

<https://support.industry.siemens.com/cs/ww/en/view/101494917>

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW3037-1BB14>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW3037-1BB14>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RW3037-1BB14>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RW3037-1BB14&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW3037-1BB14&lang=en)

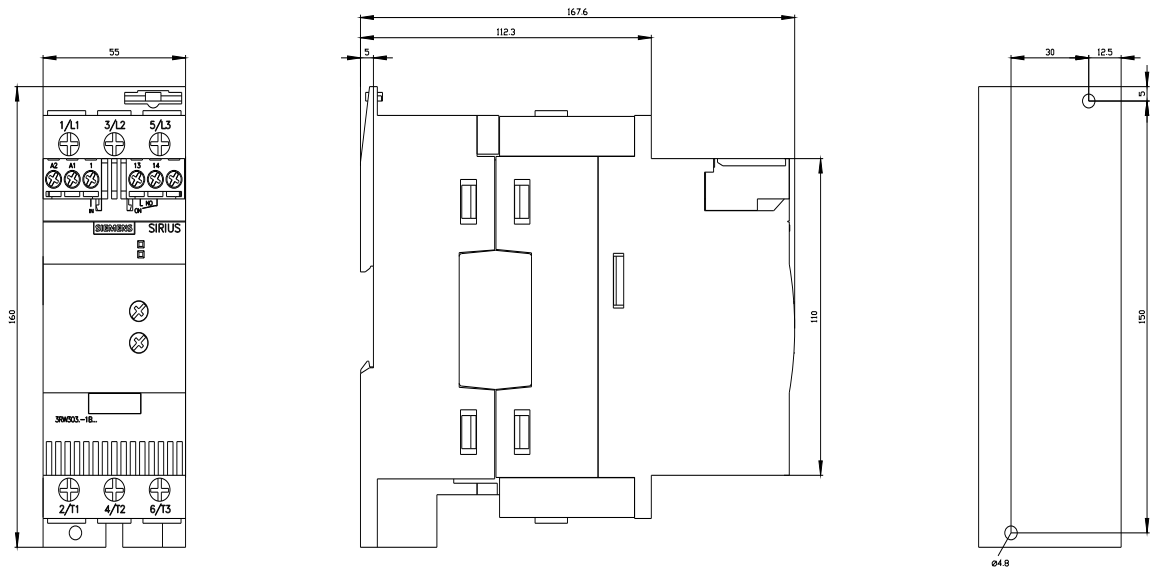

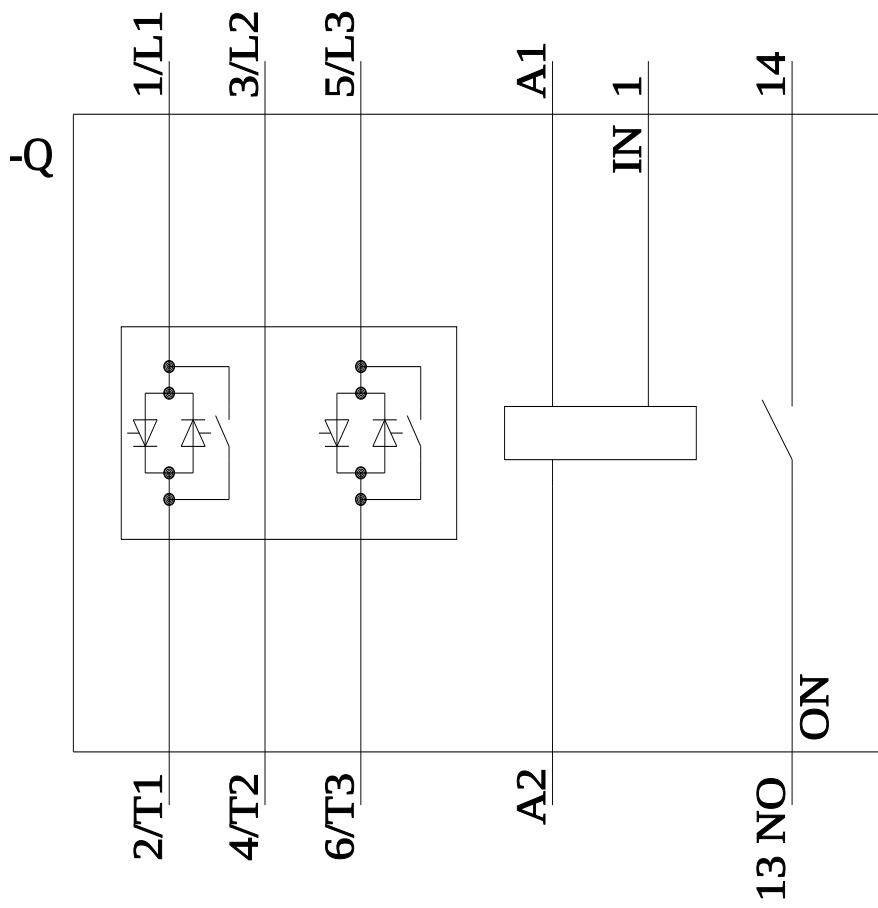

last modified:

1/16/2022