

External display and control module for SIRIUS soft starter 3RW44
Connecting cable e.g. 2.5 m (3UF7933-0BA00-0) not included in scope of delivery Required firmware version 3RW44 >= *E05*. implemented for starters 3RW44 from delivery date May 2006



product brand name
product category
product designation
design of the product

SIRIUS
Display and operator modules
External display and control module
For indicating and operating the functions provided by the 3RW44 soft starter using an externally mounted display and operator module in degree of protection IP54 (e.g. in the control cabinet door)
07/01/2006

Substance Prohibitance (Date)

Installation/ mounting/ dimensions

height 600 mm
width 960 mm

Safety related data

protection class IP on the front according to IEC 60529 IP20
touch protection on the front according to IEC 60529 finger-safe, for vertical contact from the front

Certificates/ approvals

General Product Approval

EMC

Declaration of Conformity



[Confirmation](#)



Test Certificates

Marine / Shipping

other

[Special Test Certificate](#)



[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW4900-0AC00>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW4900-0AC00>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RW4900-0AC00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW4900-0AC00&lang=en

Characteristic: Tripping characteristics, I²t, Let-through current


<https://support.industry.siemens.com/cs/ww/en/ps/3RW4900-0AC00/char>

Characteristic: Installation altitude

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RW4900-0AC00&objecttype=14&gridview=view1>


Simulation Tool for Soft Starters (STS)

<https://support.industry.siemens.com/cs/ww/en/view/101494917>

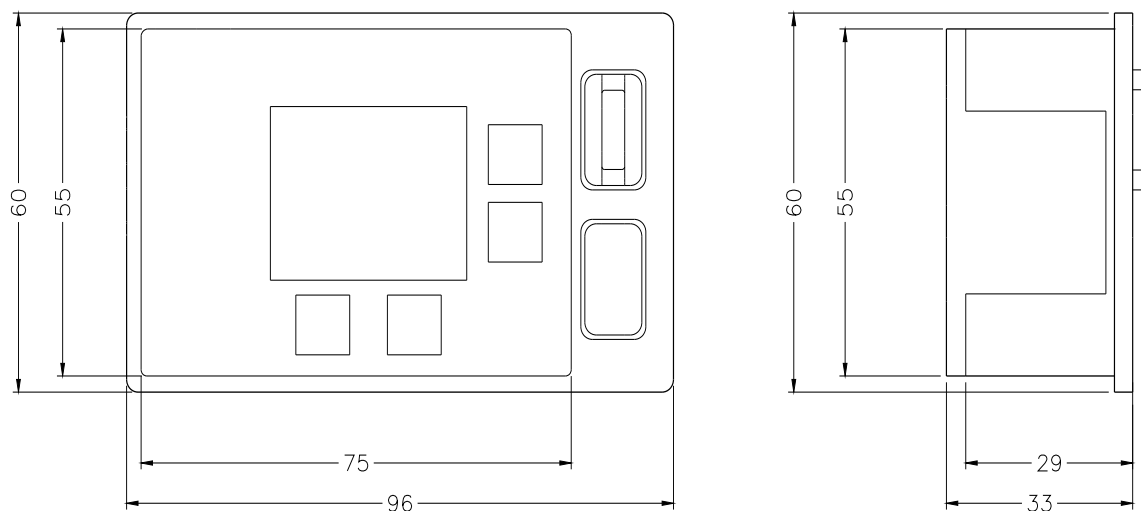

-K1

SIRIUS 3RW

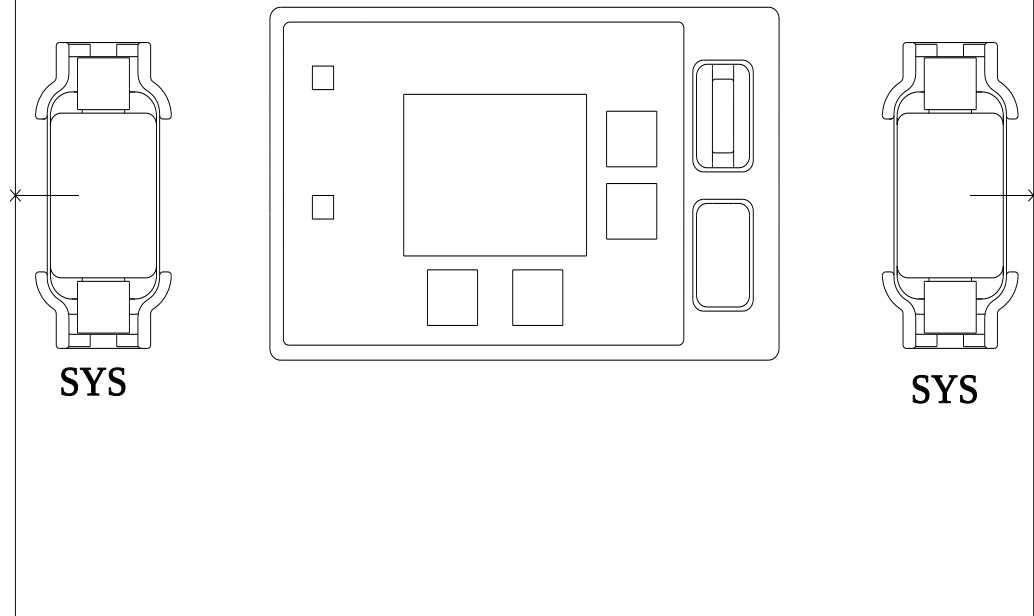

last modified:

12/15/2020 

