SIEMENS

Data sheet


3SB3000-1GA11



Mushroom pushbutton, 22mm, round, plastic, black, 40mm, momentary-contact, with holder !!! Phased-out product !!! SIRIUS ACT 3SU1 is successor Preferred successor type is >>3SU1000-1BD10-0AA0 + 3SU1500-0AA10-0AA0<<

Enclosure 1 Actuator	design of the product	Single device round					
number of command points 1 Actuator mushromm pushbutton design of the actuating element mushromm pushbutton principle of operation of the actuating element No color of the actuating element black material of the actuating element black outer diameter of the actuating element 40 mm type of unlocking device without number of switching positions 2 Front ring Yes design of the front ring glastic color of the front ring plastic color of the front ring plastic color of the front ring plastic black Holder material of the holder Plastic Ceneral technical data Product function • EMERGENCY OFF function No • EMERGENCY STOP function No protection class IP IP66 vibration resistance according to IEC 80068-2-6 20 200 Hz; 5g operating frequency maximum 1.000 1/n meterial service life (operating cycles) typical 10 000 00 reference code according to IEC 80068-2-2 S							
Actuator mushromm pushbutton geign of the actuating element momentary contact type principle of operation of the actuating element black color of the actuating element black material of the actuating element black outer diameter of the actuating element 40 mm type of unlocking device without number of switching positions 2 Front ring yes design of the front ring Ves design of the front ring plastc color of the front ring plastc color of the front ring plastc color of the front ring plastc design of the holder Plastc General technical data product function • EMERGENCY OFF function No • EMERGENCY OFF function No • EMERGENCY off function No vibration resistance according to IEC 60068-2-6 20 200 Hz: 5g operating frequency maximum 1000 1/h mechanical service life (operating cycles) typical 10 000 00 reference code according to IEC 81346-2 S Substance Prohibitance (Date		1					
design of the actuating element mushromm pushbutton prioduct extension optional light source No color of the actuating element black material of the actuating element black outer diameter of the actuating element black mumber of switching positions 2 Front ring product component front ring product component front ring Yes design of the front ring Standard material of the front ring plastic color of the front ring Plastic design of the front ring plastic material of the holder Plastic General technical data product function • EMERGENCY OFF function No • EMERGENCY STOP function No • Urbation resistance according to IEC 60068-2-6 20 200 Hz: 5g operating requency maximum 1000 1/h mechanical service life (operating cycles) typical 10 000 000 reference code according to IEC 81346-2 S Substance Prohibitance (Date) 07/01/2006 Connections/ 0/000 refe							
principle of operation of the actuating element momentary contact type product extension optional light source No color of the actuating element black outer diameter of the actuating element plastic outer diameter of the actuating element 40 mm type of unlocking device without number of switching positions 2 Front ring Yes design of the front ring Standard material of the front ring glastic color of the front ring black Holder material of the holder material of the holder Plastic General technical data Product function • EMERGENCY STOP function No • EMERGENCY STOP function No • EMERGENCY STOP function No protaction class IP IP66 vibration resistance according to IEC 60068-2-6 20200 Hz: 5g. operating frequency maximum 1000 1/h mechanical service IIfe (operating cycles) typical 1000 000 reference code according to IEC 81346-2 S Substance Prohi		mushromm pushbutton					
product extension optional light source No color of the actuating element black material of the actuating element 40 mm type of unlocking device without number of switching positions 2 Product component front ring Yes design of the front ring Standard material of the front ring black totloder black Holder Plastic color of the front ring black Holder Plastic General tochnical data Plastic General tochnical data Image: Standard product function No • EMERGENCY OFF function No protection class IP IP66 vibration resistance according to IEC 60068-2-6 20 200 Hz: 5g operating frequency maximu 1000 1/h mechanical service life (operating cycles) typical 1000 000 reference code according to IEC 60068-2-6 20 200 Hz: 5g operating frequency maximu 1000 1/h mechanical service life (operating cycles) typical 1000 0/h <t< th=""><th></th><th>- · · ·</th></t<>		- · · ·					
color of the actuating element black material of the actuating element 40 mm type of unlocking device without number of switching positions 2 Front ring Yes groduct component front ring Yes dosign of the front ring plastic color of the front ring plastic color of the front ring black Holder plastic color of the holder Plastic Ceneral tochnical data product function eEMERGENCY OFF function No eEMERGENCY OFF function No vibration resistance according to IEC 60068-2-6 20 200 Hz: 5g operating frequency maximum 1000 t/h mechanical service life (operating cycles) typical 10 000 000 reference code according to IEC 81346-2 S Substance Prohibitance (Date) 0701/2006 Connections/Terminals Tu 1.2 N·m Ambient temperature -40 +80 °C environmental category during operation according to IEC 3K6							
material of the actuating element plastic outer diameter of the actuating element 40 mm type of unlocking device without number of switching positions 2 Front ring 2 product component front ring Yes design of the front ring Standard material of the front ring black Holder material of the holder general technical data product function eEMERGENCY OFF function No eEMERGENCY STOP function No protect function No protection class IP IP66 vibration resistance according to IEC 60068-2-6 20 200 Hz: 5g operating frequency maximum 1 000 1/h mechanical service life (operating cycles) typical 10 000 000 reference code according to IEC 81346-2 S Substance Prohibitance (Date) 07/01/2006 Connections/Terminals 1 1.2 N·m Ambient conditions -25 +70 °C ambient temperature -40 +80 °C envinonmental category during operation according to IEC 60721							
outer diameter of the actuating element 40 mm type of unlocking device without number of switching positions 2 Front ring 2 product component front ring Yes design of the front ring plastic color of the front ring black Holder Plastic General technical data Product function o EMERGENCY OFF function No e EMERGENCY STOP function No vibration resistance according to IEC 60068-2-6 20 200 Hz: 5g operating frequency maximum 1 000 1/h mechanical service life (operating cycles) typical 10 000 000 reference code according to IEC 81346-2 S Substance Prohibitance (Date) 07/01/2006 Connections/Terminals 1 1.2 N·m Ambient conditions -40 +80 °C ambient temperature -40 +80 °C oduing storage -40 +80 °C							
type of unlocking device without number of switching positions 2 Front ring product component front ring Yes design of the front ring Standard material of the front ring plastic color of the front ring black Holder material of the holder material of the holder Plastic General technical data Front ring product function No • EMERGENCY OFF function No protection class IP IP66 vibration resistance according to IEC 60068-2-6 20 200 Hz: 5g operating frequency maximum 1 000 1/h mechanical service life (operating cycles) typical 10 000 000 reference code according to IEC 81346-2 S Substance Prohibitance (Date) 07/01/2006 Connections/ Terminals 1 1.2 N·m Ambient conditions -25 +70 °C environmental category during operation according to IEC 3K6 3K6 environmental category during operation according to IEC 3K6 3K6							
number of switching positions 2 Front ring product component front ring Standard material of the front ring plastic color of the front ring plastic color of the front ring plastic color of the front ring plastic color of the front ring plastic color of the front ring plastic Color of the front ring plastic color of the front ring plastic General technical data Product function e. MERGENCY OFF function No • EMERGENCY STOP function No e. EMERGENCY STOP function No protection class IP IP66 vibration resistance according to IEC 60068-2-6 20 200 Hz: 5g operating frequency maximum 1 000 1/h mechanical service life (operating cycles) typical 10 000 000 reference code according to IEC 81346-2 S Substance Prohibitance (Date) O7/01/2006 Connections/ Terminals tightening torque of the screws in the bracket 1 1.2 N m Ambient conditions ambient temperature • during storage -40 +80 °C -40 +80 °C environmental category during operation according to IEC 3/K6 3/K6 -40 +80 °C							
Front ring Yes design of the front ring Standard material of the front ring plastic color of the front ring black Holder Plastic General technical data Product function • EMERGENCY OFF function No • EMERGENCY STOP function No protection class IP IP66 vibration resistance according to IEC 60068-2-6 20 200 Hz: 5g operating frequency maximum 1 0000 1/h mechanical service life (operating cycles) typical 10 000 000 reference code according to IEC 81346-2 S Substance Prohibitance (Date) 07/01/2006 Connections/ Terminals tightening torque of the screws in the bracket tightening torque of using operation -25 +70 "C • during operation -25 +70 "C • during operation -25 +80 "C environmental category during operation according to IEC 3K6 3K6							
product component front ring Yes design of the front ring Standard material of the front ring plastic color of the front ring black Holder black Holder Plastic General technical data Product function • EMERGENCY OFF function No • EMERGENCY STOP function No protection class IP IP66 vibration resistance according to IEC 60068-2-6 20 200 Hz: 5g operating frequency maximum 1 000 1/h mechanical service life (operating cycles) typical 10 000 000 reference code according to IEC 81346-2 S Substance Prohibitance (Date) 07/01/2006 Connections/ Terminals tightening torque of the screws in the bracket ambient conditions -25 +70 °C environmental category during operation according to IEC 60721 3K6							
design of the front ring Standard material of the front ring plastic color of the front ring black Holder black material of the holder Plastic General technical data Product function • EMERGENCY OFF function No • EMERGENCY STOP function No protection class IP IP66 vibration resistance according to IEC 60068-2-6 20 200 Hz; 5g operating frequency maximum 1 000 1/h mechanical service life (operating cycles) typical 10 000 000 reference code according to IEC 81346-2 S Substance Prohibitance (Date) 07/01/2006 Connections/ Terminals tightening torque of the screws in the bracket tightening torque of the screws in the bracket 1 1.2 N·m Ambient conditions -25 +70 °C ambient temperature -40 +80 °C environmental category during operation according to IEC 3K6 3K6		Yes					
Imaterial of the front ring plastic color of the front ring plastic color of the front ring black Holder Plastic General technical data Product function • EMERGENCY OFF function No • EMERGENCY STOP function No product function class IP IP66 vibration resistance according to IEC 60068-2-6 20 200 Hz: 5g operating frequency maximum 1 000 1/h mechanical service life (operating cycles) typical 10 000 000 reference code according to IEC 81346-2 S Substance Prohibitance (Date) 07/01/2006 Connections/ Terminals 1 1.2 N·m tightening torque of the screws in the bracket 1 1.2 N·m Ambient conditions -25 +70 °C e during operation -25 +70 °C • during storage -40 +80 °C environmental category during operation according to IEC 3K6 3K6							
color of the front ring black Holder Plastic General technical data Product function • EMERGENCY OFF function No • EMERGENCY STOP function No protection class IP IP66 vibration resistance according to IEC 60068-2-6 20 200 Hz: 5g operating frequency maximum 1 000 1/h mechanical service life (operating cycles) typical 10 000 000 reference code according to IEC 81346-2 S Substance Prohibitance (Date) 07/01/2006 Connections/ Terminals 1 1.2 N·m Ambient conditions ambient temperature • during operation -25 +70 °C • during storage -40 +80 °C environmental category during operation according to IEC 3K6 3K6							
Holder Plastic General technical data product function • EMERGENCY OFF function No • EMERGENCY STOP function No protection class IP IP66 vibration resistance according to IEC 60068-2-6 20 200 Hz: 5g operating frequency maximum 1 000 1/h mechanical service life (operating cycles) typical 10 000 000 reference code according to IEC 81346-2 S Substance Prohibitance (Date) 07/01/2006 Connections/ Terminals 1 1.2 N·m Ambient conditions -25 +70 °C ambient temperature -40 +80 °C environmental category during operation according to IEC 60721 3K6		•					
material of the holder Plastic General technical data product function No • EMERGENCY OFF function No • EMERGENCY STOP function No protection class IP IP66 vibration resistance according to IEC 60068-2-6 20 200 Hz: 5g operating frequency maximum 1 000 1/h mechanical service life (operating cycles) typical 10 000 000 reference code according to IEC 81346-2 S Substance Prohibitance (Date) 07/01/2006 Connections/ Terminals 1 1.2 N·m tightening torque of the screws in the bracket 1 1.2 N·m Ambient conditions -25 +70 °C amblent temperature -40 +80 °C environmental category during operation according to IEC 3K6 3K6		Muur					
General technical data product function • EMERGENCY OFF function No • EMERGENCY STOP function No protection class IP vibration resistance according to IEC 60068-2-6 20 200 Hz: 5g operating frequency maximum 1 000 1/h mechanical service life (operating cycles) typical 10 000 000 reference code according to IEC 81346-2 S Substance Prohibitance (Date) Or//01/2006 Connections/ Terminals tightening torque of the screws in the bracket 1 1.2 N·m Ambient temperature • during operation -25 +70 °C • during storage -40 +80 °C environmental category during operation according to IEC 60721		Plastic					
product function No • EMERGENCY OFF function No • EMERGENCY STOP function No protection class IP IP66 vibration resistance according to IEC 60068-2-6 20 200 Hz: 5g operating frequency maximum 1 000 1/h mechanical service life (operating cycles) typical 10 000 000 reference code according to IEC 81346-2 S Substance Prohibitance (Date) 07/01/2006 Connections/ Terminals tightening torque of the screws in the bracket 1 1.2 N·m Ambient conditions ambient temperature -25 +70 °C • during operation -25 +70 °C • during storage -40 +80 °C environmental category during operation according to IEC 3K6							
• EMERGENCY OFF function No • EMERGENCY STOP function No protection class IP IP66 vibration resistance according to IEC 60068-2-6 20 200 Hz: 5g operating frequency maximum 1 000 1/h mechanical service life (operating cycles) typical 10 000 000 reference code according to IEC 81346-2 S Substance Prohibitance (Date) 07/01/2006 Connections/ Terminals 1 1.2 N·m tightening torque of the screws in the bracket 1 1.2 N·m Ambient conditions -25 +70 °C • during operation -25 +70 °C • during storage -40 +80 °C environmental category during operation according to IEC 80721 3K6							
• EMERGENCY STOP function No protection class IP IP66 vibration resistance according to IEC 60068-2-6 20 200 Hz: 5g operating frequency maximum 1 000 1/h mechanical service life (operating cycles) typical 10 000 000 reference code according to IEC 81346-2 S Substance Prohibitance (Date) 07/01/2006 Connections/ Terminals 1 1.2 N·m tightening torque of the screws in the bracket 1 1.2 N·m Ambient conditions -25 +70 °C • during operation -25 +80 °C environmental category during operation according to IEC 3K6 3K6		No					
protection class IP IP66 vibration resistance according to IEC 60068-2-6 20 200 Hz: 5g operating frequency maximum 1 000 1/h mechanical service life (operating cycles) typical 10 000 000 reference code according to IEC 81346-2 S Substance Prohibitance (Date) 07/01/2006 Connections/ Terminals 1 1.2 N·m tightening torque of the screws in the bracket 1 1.2 N·m Ambient conditions -25 +70 °C • during operation -25 +70 °C • during storage -40 +80 °C environmental category during operation according to IEC 3K6 3K6							
vibration resistance according to IEC 60068-2-6 20 200 Hz: 5g operating frequency maximum 1 000 1/h mechanical service life (operating cycles) typical 10 000 000 reference code according to IEC 81346-2 S Substance Prohibitance (Date) 07/01/2006 Connections/ Terminals 1 1.2 N·m tightening torque of the screws in the bracket 1 1.2 N·m Ambient conditions -25 +70 °C • during operation -25 +70 °C • during storage -40 +80 °C environmental category during operation according to IEC 3K6 3K6							
operating frequency maximum 1 000 1/h mechanical service life (operating cycles) typical 10 000 000 reference code according to IEC 81346-2 S Substance Prohibitance (Date) 07/01/2006 Connections/ Terminals 07/01/2006 tightening torque of the screws in the bracket 1 1.2 N·m Ambient conditions -25 +70 °C • during operation -25 +70 °C • during storage -40 +80 °C environmental category during operation according to IEC 3K6 3K6 Installation/ mounting/ dimensions -25 +70 °C	•						
mechanical service life (operating cycles) typical 10 000 000 reference code according to IEC 81346-2 \$ Substance Prohibitance (Date) 07/01/2006 Connections/ Terminals 1 1.2 N·m Ambient conditions 1 1.2 N·m ambient temperature -25 +70 °C • during operation -25 +70 °C • during storage -40 +80 °C environmental category during operation according to IEC 60721 3K6		-					
reference code according to IEC 81346-2 S Substance Prohibitance (Date) 07/01/2006 Connections/ Terminals 1 1.2 N·m tightening torque of the screws in the bracket 1 1.2 N·m Ambient conditions ambient temperature • during operation -25 +70 °C • during storage -40 +80 °C environmental category during operation according to IEC 60721 3K6							
Substance Prohibitance (Date) 07/01/2006 Connections/ Terminals 1 tightening torque of the screws in the bracket 1 Ambient conditions 1 ambient temperature -25 • during operation -25 • during storage -40 environmental category during operation according to IEC 60721 3K6		S					
tightening torque of the screws in the bracket 1 1.2 N·m Ambient conditions		07/01/2006					
Ambient conditions -25 +70 °C • during operation -25 +70 °C • during storage -40 +80 °C environmental category during operation according to IEC 60721 3K6 Installation/ mounting/ dimensions -25 +70 °C							
ambient temperature • during operation • during storage • during storage -40 +80 °C environmental category during operation according to IEC 60721 Installation/ mounting/ dimensions	tightening torque of the screws in the bracket	1 1.2 N·m					
• during operation -25 +70 °C • during storage -40 +80 °C environmental category during operation according to IEC 3K6 60721 3K6							
during storage -40 +80 °C environmental category during operation according to IEC 60721 Installation/ mounting/ dimensions	ambient temperature						
environmental category during operation according to IEC 3K6 60721 Installation/ mounting/ dimensions	 during operation 	-25 +70 °C					
60721 Installation/ mounting/ dimensions	during storage	-40 +80 °C					
		3K6					
fastening method front mounting	Installation/ mounting/ dimensions						
non mounting	fastening method	front mounting					

shape of the installation	on opening	rou				
mounting diameter			22 mm			
mounting height			23.5 mm			
installation width	nstallation width			40 mm		
installation depth 29 mm						
Certificates/ approvals						
General Product App	roval		Marine / Shipping			
(SP)		EHC	Lloyds Register uis	PRS	RINA	
Marine / Shipping	other					
ENVILCEMENT	<u>Miscellaneous</u>	<u>Confirmation</u>				
urther information						
	to exit the Russian mar		ssian husinoss			
Siemens is working of Please contact your loc EAC relevant market (o Information on the page	n the renewal of the cur al Siemens office on the s ther than the sanctioned ckaging	rent EAC certificates. status of validity of the E EAEU member states Ru	AC certification if you intend	I to import or offer to sup	ply these products to an	
	<u>siemens.com/cs/ww/en/v</u> nloadcenter (Catalogs, I					
https://www.siemens.co		5.00.000,,				
Industry Mall (Online of						
https://mall.industry.sier Cax online generator	mens.com/mall/en/en/Cat	alog/product?mltb=3SB3	<u>3000-1GA11</u>			
	n.siemens.com/WW/CAX	Corder/default.aspx?lang	en&mlfb=3SB3000-1GA11	1		
Service&Support (Mar	nuals, Certificates, Char	acteristics, FAQs,)		-		
	siemens.com/cs/ww/en/p					
	uct images, 2D dimensi siemens.com/bilddb/cax_		l <mark>s, device circuit diagrams</mark> <u>1GA11⟨=en</u>	s, EPLAN macros,)		

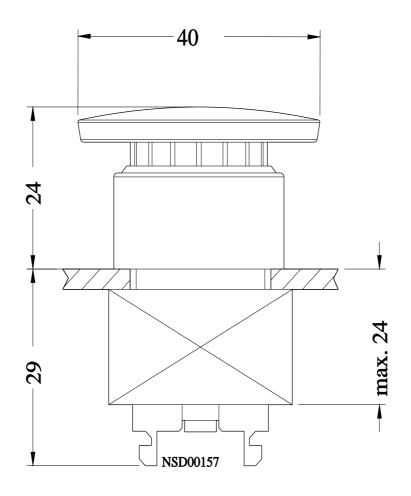

last modified:

1/18/2021 🖸