# **SIEMENS**

Data sheet 3SB3000-1HA20



22MM PLASTIC ROUND ACTUATOR: EMERGEN.-STOP MUSHR.PUSHB. 40MM LATCH.W. ROT.-TO-UNLATCH MECH. WITH HOLDER RED !!! Phased-out product !!! SIRIUS ACT 3SU1 is successor Preferred successor type is >>3SU1000-1HB20-0AA0 + 3SU1500-0AA10-0AA0<<

design of the product	Single device round with positive latching in accordance with ISO 13850
Enclosure	
number of command points	1
Actuator	
design of the actuating element	EMERGENCY STOP mushroom pushbutton
principle of operation of the actuating element	latching
product extension optional light source	No
color of the actuating element	red
material of the actuating element	plastic
outer diameter of the actuating element	40.5 mm
type of unlocking device	rotate-to-unlatch mechanism
number of switching positions	2
Front ring	
product component front ring	No
Holder	
material of the holder	Plastic
General technical data	
product function	
<ul> <li>EMERGENCY OFF function</li> </ul>	Yes
<ul> <li>EMERGENCY STOP function</li> </ul>	Yes
protection class IP	IP66
vibration resistance according to IEC 60068-2-6	20 200 Hz: 5g
operating frequency maximum	1 000 1/h
mechanical service life (switching cycles) typical	300 000
reference code according to IEC 81346-2	S
Substance Prohibitance (Date)	07/01/2006
Connections/ Terminals	
tightening torque of the screws in the bracket	1 1.2 N·m
Safety related data	
B10 value with high demand rate according to SN 31920	100 000
proportion of dangerous failures	
<ul> <li>with low demand rate according to SN 31920</li> </ul>	20 %
<ul> <li>with high demand rate according to SN 31920</li> </ul>	20 %
failure rate [FIT] with low demand rate according to SN 31920	100 FIT
Ambient conditions	
ambient temperature	
<ul><li>during operation</li></ul>	-25 +70 °C
<ul> <li>during storage</li> </ul>	-40 +80 °C
environmental category during operation according to IEC	3K6

#### 60721

## Installation/ mounting/ dimensions

fastening method

shape of the installation opening

mounting diameter mounting height

installation width installation depth

front mounting

round

22 mm

49 mm

40.5 mm 29 mm

# Certificates/ approvals

## **General Product Approval**

Functional Safety/Safety of Machinery

**Test Certificates** 

Marine / Shipping









Type Test Certificates/Test Report



# Marine / Shipping









Miscellaneous

other

Confirmation

## Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SB3000-1HA20


Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SB3000-1HA20

 ${\bf Service \& Support\ (Manuals,\ Certificates,\ Characteristics,\ FAQs,...)}$ 

https://support.industry.siemens.com/cs/ww/en/ps/3SB3000-1HA20

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) <a href="http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3SB3000-1HA20&lang=en">http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3SB3000-1HA20&lang=en</a>

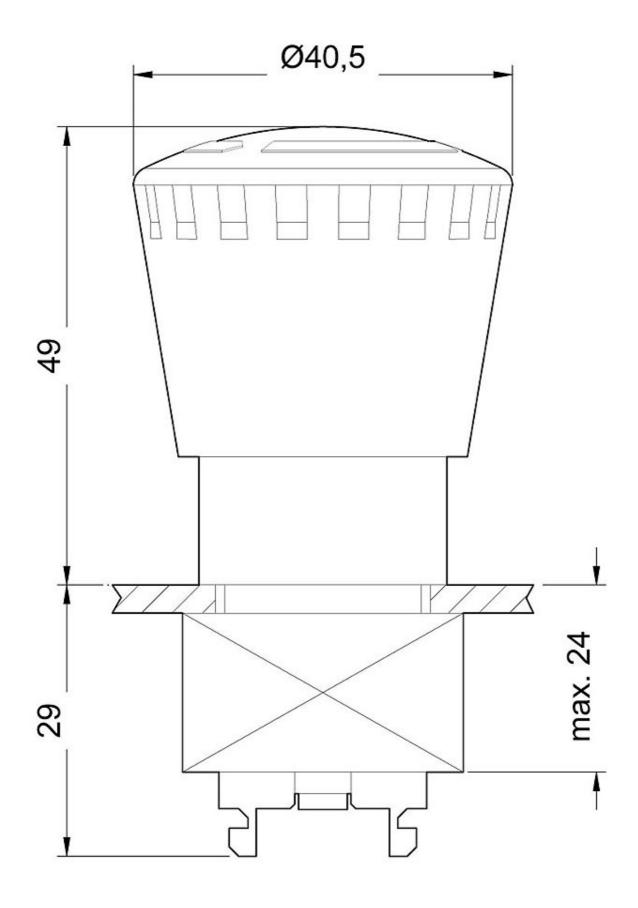

last modified: 1/27/2022 🖸