SIEMENS

Product data sheet 3SB3205-0AA61



22MM PLASTIC ROUND COMPLETE UNIT COMBINATION: ILLUMINATED PUSHBUTTON WITH FLAT BUTTON NON-ILLUMINATED WITH LAMP HOLDER BA 9S WITHOUT LAMP SCREW TERMINAL, 1NO+1NC WITH HOLDER WHITE

Front ring:		
Product component / front ring		Yes
Material / of the front ring		plastic
Color / of the front ring		black
Enclosure:		
Shape / of the housing front		round
material / of the housing		plastic
General technical details:		
Number of control points		1
Type of voltage		
of the operating voltage		AC/DC
Operating voltage / rated value		
• minimum	V	5
• maximum	V	400
Design of the electrical connection		screw-type terminals
Number of switching positions		2
Product component / fluorescent materials		No
Product extension / optional / fluorescent materials		Yes

Resistance against shock		
 for devices with incandescent lamp / according to IEC 60068-2- 27 		<= 30g
 for devices without incandescent lamp / according to IEC 60068- 2-27 		<= 50g
Resistance against vibration / according to IEC 60068-2-6		20 200 Hz: 5g
Operating cycles / maximum	1/h	1,000
Mechanical operating cycles as operating time / typical		3,000,000
Item designation		
according to DIN EN 61346-2		S
 according to DIN 40719 extendable after IEC 204-2 / according to IEC 750 		S
Auxiliary circuit:		
Number of NC contacts / for auxiliary contacts		1
Number of NO contacts / for auxiliary contacts		1
Number of NO contacts / for auxiliary contacts Number of change-over switches / for auxiliary contacts		0
Number of change-over switches / for auxiliary contacts		
Number of change-over switches / for auxiliary contacts Installation/mounting/dimensions:		0
Number of change-over switches / for auxiliary contacts Installation/mounting/dimensions: Execution of the mounting		0 BA 9s, without lamp
Number of change-over switches / for auxiliary contacts Installation/mounting/dimensions: Execution of the mounting Type of mounting	mm	BA 9s, without lamp front mounting
Number of change-over switches / for auxiliary contacts Installation/mounting/dimensions: Execution of the mounting Type of mounting Shape / of the installation hole	mm mm	BA 9s, without lamp front mounting round
Number of change-over switches / for auxiliary contacts Installation/mounting/dimensions: Execution of the mounting Type of mounting Shape / of the installation hole Installation width		BA 9s, without lamp front mounting round 28.5
Number of change-over switches / for auxiliary contacts Installation/mounting/dimensions: Execution of the mounting Type of mounting Shape / of the installation hole Installation width Mounting diameter	mm	BA 9s, without lamp front mounting round 28.5
Number of change-over switches / for auxiliary contacts Installation/mounting/dimensions: Execution of the mounting Type of mounting Shape / of the installation hole Installation width Mounting diameter Mounting height	mm mm	BA 9s, without lamp front mounting round 28.5
Number of change-over switches / for auxiliary contacts Installation/mounting/dimensions: Execution of the mounting Type of mounting Shape / of the installation hole Installation width Mounting diameter Mounting height Tightening torque / of the screws in the bracket / maximum	mm mm	BA 9s, without lamp front mounting round 28.5
Number of change-over switches / for auxiliary contacts Installation/mounting/dimensions: Execution of the mounting Type of mounting Shape / of the installation hole Installation width Mounting diameter Mounting height Tightening torque / of the screws in the bracket / maximum Ambient conditions:	mm mm	BA 9s, without lamp front mounting round 28.5
Number of change-over switches / for auxiliary contacts Installation/mounting/dimensions: Execution of the mounting Type of mounting Shape / of the installation hole Installation width Mounting diameter Mounting height Tightening torque / of the screws in the bracket / maximum Ambient conditions: Ambient temperature	mm mm N·m	BA 9s, without lamp front mounting round 28.5 22 8 1

General Product Approval





ROSTEST



Manufacturer

Test Certificates

Shipping Approval













other

Manufacturer

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)

http://www.siemens.com/industrial-controls/mall

CAx-Online-Generator


http://www.siemens.com/cax


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

http://support.automation.siemens.com/WW/view/en/3SB3205-0AA61/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3SB3205-0AA61



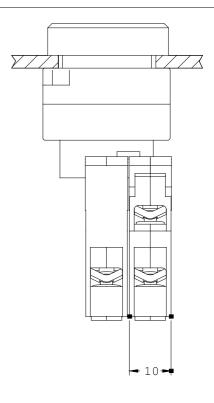

last change: Oct 31, 2011