SIEMENS

Data sheet


3SB3500-2EA11



22MM METAL ROUND ACTUATOR: SELECTOR SWITCH MOMENTARY CONTACT TYPE 3 SWITCH POSITIONS I-O-II NON-ILLUMINATED WITH HOLDER BLACK !!! Phased-out product !!! SIRIUS ACT 3SU1 is successor Preferred successor type is >>3SU1052-2BM60-0AA0 + 3SU1550-0AA10-0AA0<<

design of the product Single device round Enclosure I Actuator I design of the actuating element selector switch principle of operation of the actuating element momentary contact type color of the actuating element black material of the actuating element plastic outer diameter of the actuating element 28.5 mm type of unlocking device without number of switching positions 3 actuating angle - • clockwise 50° • anticlockwise 50° • actuating angle - • clockwise 50° • anticlockwise 50° • actuating angle - • clockwise 50° • anticlockwise 50° #roting Yes design of the front ring Standard material of the front ring Metal General acthical data - product function No • EMERGENCY STOP function No • EMERGENCY STOP function No • EMERGENCY OF fun	1 igu e sinna				
number of command points 1 Actuator	design of the product	Single device round			
Actuator design of the actuating element selector switch principle of operation of the actuating element momentary contact type product extension optional light source No color of the actuating element black material of the actuating element plastic outer diameter of the actuating element 28.5 mm type of unlocking device without number of switching positions 3 actuating angle 0° • olockwise 50° • anticlockwise 50° • anticlockwise 50° • anticlockwise 50° • anticlockwise 50° front ring Yees design of the front ring metal color of the front ring metal color of the front ring selector Holder metal todard metal color of the front ring selector product function No • EMERGENCY OFF function No • EMERGENCY STOP function <th colspan="5">Enclosure</th>	Enclosure				
design of the actuating element selector switch principle of operation of the actuating element momentary contact type product extension optional light source No color of the actuating element black material of the actuating element plastic outer diameter of the actuating element 28.5 mm type of unlocking device without number of switching positions 3 actuating angle 60ck/wise e dockwise 50° e anticlockwise 50° product component front ring Yes design of the front ring Standard material of the front ring metal color of the front ring silver Holder Metal General technical data product function e KMERGENCY OFF function No e KMERGENCY STOP function No e KMERGENCY STOP function No vibration resistance according to IEC 60068-2-6 20 200 Hz; 5g operating frequency maximum 1000 1/h mechanical service life (operating cycles) typical 3	number of command points	1			
principle of operation of the actuating element momentary contact type product extension optional light source No color of the actuating element black outer diameter of the actuating element 28.5 mm type of unlocking device without number of switching positions 3 actuating angle 50° • clockwise 50° • anticlockwise 50° Front ring Yes product component front ring Yes design of the front ring Standard material of the holder Metal Color of the front ring silver Holder Metal General technical data 100 t/n product function No • EMERGENCY OFF function No • EMERGENCY OFF function No • EMERGENCY OFF function No • EMERGENCY STOP function No protection class IP IP67 vibration resistance according to IEC 60068-2-6 20 200 Hz: 5g operating frequency maximum 1000 1/n mechanical service Iif (operating cycles) typical 300 000 reference code according to IEC 81346-2 S Substance Prohibitance (Date) 07/01/2006 Connections/I	Actuator				
product extension optional light source No color of the actuating element black material of the actuating element 28.5 mm type of unlocking device without number of switching positions 3 actuating angle - • clockwise 50° • anticockwise 50° • anticockwise 50° • anticockwise 50° • anticockwise 50° front ring Yes design of the front ring Standard material of the front ring silver Holder Metal Ceneral technical data - product function No • EMERGENCY OFF function No • EMERGENCY OFF function No • EMERGENCY OFF function No production class IP IP67 vibration resistance according to IEC 60068-2-6 20 200 Hz: 5g operating frequency maximum 1000 1/h mechanical service life (operating cycles) typical 300 000 reference code according to IEC 81346-2 <th>design of the actuating element</th> <th>selector switch</th>	design of the actuating element	selector switch			
color of the actuating element black material of the actuating element 28.5 mm type of unlocking device without number of switching positions 3 actuating angle - • clockwise 50° • anticlockwise 50° • antise <	principle of operation of the actuating element	momentary contact type			
material of the actuating element plastic outer diameter of the actuating element 28.5 mm type of unlocking device without number of switching positions 3 actuating angle - • clockwise 50° • anticlockwise 50° # anticlockwise 50° product component front ring Yes design of the front ring Standard material of the front ring metal color of the front ring silver Holder Metal General technical data	product extension optional light source	No			
outer diameter of the actuating element 28.5 mm type of unlocking device without number of switching positions 3 actuating angle - • clockwise 50° • anticlockwise 50° Front ring Yes design of the front ring Yes design of the front ring metal color of the front ring metal color of the front ring silver Holder Metal General tochnical data	color of the actuating element	black			
type of unlocking device without number of switching positions 3 actuating angle 50° e clockwise 50° e anticlockwise 50° Front ring Yes design of the front ring Yes design of the front ring metal color of the front ring metal color of the front ring silver Holder Metal General technical data metal product function No • EMERGENCY OFF function No • EMERGENCY STOP function No • EMERGENCY STOP function No • EMERGENCY STOP function No • protection class IP IP67 vibration resistance according to IEC 60068-2-6 20 200 Hz: 5g operating frequency maximum 1000 1/h mechanical service life (operating cycles) typical 300 000 reference code according to IEC 81346-2 S Substance Prohibitance (Date) 07/01/2006 Connections/ Terminals 14 1.6 N:m Ambient conditions ambient temperature • durin	material of the actuating element	plastic			
number of switching positions 3 actuating angle 50° • clockwise 50° • anticlockwise 50° Front ring Yes design of the front ring Standard material of the front ring metal color of the front ring metal color of the front ring silver Holder metal general technical data metal product function No • EMERGENCY OFF function No • EMERGENCY STOP function No protection class IP IP67 vibration resistance according to IEC 60068-2-6 20 200 Hz: 5g operating frequency maximum 1 000 1/h mechanical service life (operating cycles) typical 300 000 reference code according to IEC 81346-2 S Substance Prohibitance (Date) 07/01/2006 Connections/ Terminals 1.4 1.6 N·m Ambient conditions -25 470 °C ambient temperature -40 480 °C	outer diameter of the actuating element	28.5 mm			
actuating angle 50° • clockwise 50° • anticlockwise 50° Front ring 50° product component front ring Yes design of the front ring Standard material of the front ring metal color of the front ring silver Holder Metal General technical data metal product function No • EMERGENCY OFF function No Protection class IP IP67 vibration resistance according to IEC 60068-2-6 20 200 Hz: 5g operating frequency maximum 1 000 1/h mechanical service life (operating cycles) typical 300 000 reference code according to IEC 61346-2 S Substance Prohibitance (Date) 07/01/2006 Connections/ Terminals 1.4 1.6 N·m Amblent conditions -25 470 °C amblent temperature -40 480 °C	type of unlocking device	without			
• clockwise 50° • anticlockwise 50° Front ring Yes design of the front ring Standard material of the front ring metal color of the front ring metal color of the front ring metal color of the front ring silver Holder Metal General technical data	number of switching positions	3			
• anticlockwise 50° Front ring Yes design of the front ring Standard material of the front ring metal color of the front ring silver Holder Metal General technical data General technical data product function No • EMERGENCY OFF function No • EMERGENCY OFF function No metanic of ite (operating to EC 60068-2-6 20 200 Hz: 5g operating frequency maximum 1000 1/h mechanical service life (operating cycles) typical 300 000 reference code according to EC 81346-2 S Substance Prohibitance (Date) 07/01/2006 Connections/ Terminals 1.4 1.6 N·m Ambient temperature - • during operation -25 +70 °C • during storage -40 +80 °C	actuating angle				
Front ring Yes design of the front ring Standard material of the front ring metal color of the front ring metal color of the front ring silver Holder material of the holder Metal General technical data product function No • EMERGENCY OFF function No • EMERGENCY STOP function No protection class IP IP67 vibration resistance according to IEC 60068-2-6 20 200 Hz: 5g operating frequency maximum 1 000 1/h mechanical service life (operating cycles) typical 300 000 reference code according to IEC 81346-2 S Substance Prohibitance (Date) 07/01/2006 Connections/Terminals 14 1.6 N·m Ambient conditions -25 +70 °C ambient temperature -40 +80 °C	clockwise	50°			
product component front ring Yes design of the front ring Standard material of the front ring metal color of the front ring silver Holder Metal General technical data Forduct function product function No • EMERGENCY OFF function No protection class IP IP67 vibration resistance according to IEC 60068-2-6 20 200 Hz: 5g operating frequency maximum 1 000 1/h mechanical service life (operating cycles) typical 300 000 reference code according to IEC 81346-2 S Substance Prohibitance (Date) 07/01/2006 Connections/ Terminals tightening torque of the screws in the bracket 4mbient conditions -25 +70 °C ambient temperature -40 +80 °C	anticlockwise	50°			
design of the front ring Standard material of the front ring metal color of the front ring silver Holder Metal General technical data Image: Standard product function No • EMERGENCY OFF function No • EMERGENCY STOP function No protection class IP IP67 vibration resistance according to IEC 60068-2-6 20 200 Hz: 5g operating frequency maximum 1 000 1/h mechanical service life (operating cycles) typical 300 000 reference code according to IEC 81346-2 S Substance Prohibitance (Date) 07/01/2006 Connections/ Terminals 14 1.6 N·m tightening torque of the screws in the bracket 1.4 1.6 N·m Ambient conditions -25 +70 °C ambient temperature -40 +80 °C	Front ring				
material of the front ringmetalcolor of the front ringsilverHolderMetalGeneral technical dataMetalgeneral technical dataForduct function• EMERGENCY OFF functionNo• EMERGENCY STOP functionNo• EMERGENCY STOP functionNoprotection class IPIP67vibration resistance according to IEC 60068-2-620 200 Hz: 5goperating frequency maximum1 000 1/hmechanical service life (operating cycles) typical300 000reference code according to IEC 81346-2SSubstance Prohibitance (Date)07/01/2006Connections/ Terminals1.4 1.6 N·mAmbient conditions-25 +70 °C• during operation-25 +70 °C• during storage-40 +80 °C	product component front ring	Yes			
color of the front ring silver Holder Metal General technical data material of the holder product function No • EMERGENCY OFF function No • EMERGENCY STOP function No protection class IP IP67 vibration resistance according to IEC 60068-2-6 20 200 Hz: 5g operating frequency maximum 1 000 1/h mechanical service life (operating cycles) typical 300 000 reference code according to IEC 81346-2 S Substance Prohibitance (Date) 07/01/2006 Connections/ Terminals tightening torque of the screws in the bracket 1.4 1.6 N·m Ambient conditions ambient temperature -25 +70 °C • during operation -25 +70 °C • during storage -40 +80 °C	design of the front ring	Standard			
Holder Metal General technical data product function EMERGENCY OFF function EMERGENCY STOP function No EMERGENCY STOP function No protection class IP IP67 vibration resistance according to IEC 60068-2-6 20 200 Hz: 5g operating frequency maximum 1 000 1/h mechanical service life (operating cycles) typical 300 000 reference code according to IEC 81346-2 S Substance Prohibitance (Date) 07/01/2006 Connections/ Terminals 1.4 1.6 N·m Ambient conditions -25 +70 °C ambient temperature -40 +80 °C ouring storage -40 +80 °C	material of the front ring	metal			
material of the holder Metal General technical data product function • EMERGENCY OFF function • EMERGENCY STOP function No • EMERGENCY STOP function No protection class IP IP67 vibration resistance according to IEC 60068-2-6 20 200 Hz: 5g operating frequency maximum 1 000 1/h mechanical service life (operating cycles) typical 300 000 reference code according to IEC 81346-2 S Substance Prohibitance (Date) 07/01/2006 Connections/ Terminals tightening torque of the screws in the bracket 1.4 1.6 N·m Ambient conditions ambient temperature • during operation -25 +70 °C -40 +80 °C	color of the front ring	silver			
General technical data product function • EMERGENCY OFF function No • EMERGENCY STOP function protection class IP vibration resistance according to IEC 60068-2-6 20 200 Hz: 5g operating frequency maximum 1 000 1/h mechanical service life (operating cycles) typical 300 000 reference code according to IEC 81346-2 S Substance Prohibitance (Date) 07/01/2006 Connections/ Terminals tightening torque of the screws in the bracket 1.4 1.6 N·m Ambient conditions ambient temperature • during operation -25 +70 °C • during storage	Holder				
product function No • EMERGENCY OFF function No • EMERGENCY STOP function No protection class IP IP67 vibration resistance according to IEC 60068-2-6 20 200 Hz: 5g operating frequency maximum 1 000 1/h mechanical service life (operating cycles) typical 300 000 reference code according to IEC 81346-2 S Substance Prohibitance (Date) 07/01/2006 Connections/ Terminals 1.4 1.6 N·m Ambient conditions -25 +70 °C • during operation -25 +70 °C • during storage -40 +80 °C	material of the holder	Metal			
• EMERGENCY OFF function No • EMERGENCY STOP function No protection class IP IP67 vibration resistance according to IEC 60068-2-6 20 200 Hz: 5g operating frequency maximum 1 000 1/h mechanical service life (operating cycles) typical 300 000 reference code according to IEC 81346-2 S Substance Prohibitance (Date) 07/01/2006 Connections/ Terminals 1.4 1.6 N·m Ambient conditions -25 +70 °C • during storage -40 +80 °C	General technical data				
• EMERGENCY STOP function No protection class IP IP67 vibration resistance according to IEC 60068-2-6 20 200 Hz: 5g operating frequency maximum 1 000 1/h mechanical service life (operating cycles) typical 300 000 reference code according to IEC 81346-2 S Substance Prohibitance (Date) 07/01/2006 Connections/ Terminals 1.4 1.6 N·m Ambient conditions -25 +70 °C • during operation -25 +70 °C • during storage -40 +80 °C	product function				
protection class IPIP67vibration resistance according to IEC 60068-2-620 200 Hz: 5goperating frequency maximum1 000 1/hmechanical service life (operating cycles) typical300 000reference code according to IEC 81346-2SSubstance Prohibitance (Date)07/01/2006Connections/ Terminals1.4 1.6 N·mAmbient conditions-25 +70 °C• during operation-25 +70 °C• during storage-40 +80 °C	 EMERGENCY OFF function 	No			
vibration resistance according to IEC 60068-2-620 200 Hz: 5goperating frequency maximum1 000 1/hmechanical service life (operating cycles) typical300 000reference code according to IEC 81346-2SSubstance Prohibitance (Date)07/01/2006Connections/ Terminals1.4 1.6 N·mAmbient conditions-25 +70 °C• during operation-25 +70 °C• during storage-40 +80 °C	EMERGENCY STOP function	No			
operating frequency maximum 1 000 1/h mechanical service life (operating cycles) typical 300 000 reference code according to IEC 81346-2 S Substance Prohibitance (Date) 07/01/2006 Connections/ Terminals 07/01/2006 tightening torque of the screws in the bracket 1.4 1.6 N·m Ambient conditions -25 +70 °C • during operation -25 +70 °C • during storage -40 +80 °C	protection class IP	IP67			
mechanical service life (operating cycles) typical 300 000 reference code according to IEC 81346-2 S Substance Prohibitance (Date) 07/01/2006 Connections/ Terminals 1.4 1.6 N·m Ambient conditions ambient temperature • during operation -25 +70 °C • during storage -40 +80 °C	vibration resistance according to IEC 60068-2-6	20 200 Hz: 5g			
reference code according to IEC 81346-2 S Substance Prohibitance (Date) 07/01/2006 Connections/ Terminals I.4 1.6 N·m tightening torque of the screws in the bracket 1.4 1.6 N·m Ambient conditions ambient temperature • during operation -25 +70 °C • during storage -40 +80 °C	operating frequency maximum	1 000 1/h			
Substance Prohibitance (Date) 07/01/2006 Connections/ Terminals	mechanical service life (operating cycles) typical	300 000			
Connections/ Terminals tightening torque of the screws in the bracket 1.4 1.6 N·m Ambient conditions	reference code according to IEC 81346-2	S			
tightening torque of the screws in the bracket 1.4 1.6 N·m Ambient conditions	Substance Prohibitance (Date)	07/01/2006			
Ambient conditions ambient temperature • during operation • during storage -40 +80 °C	Connections/ Terminals				
ambient temperature -25 +70 °C • during storage -40 +80 °C	tightening torque of the screws in the bracket	1.4 1.6 N·m			
• during operation -25 +70 °C • during storage -40 +80 °C	Ambient conditions				
• during storage -40 +80 °C	ambient temperature				
	during operation	-25 +70 °C			
environmental category during operation according to IEC 3K6	during storage	-40 +80 °C			
	environmental category during operation according to IEC	3K6			

General Product Approval Marine / Shipping Image: Second se						
fastening method front mounting shape of the installation opening round mounting diameter 22 mm mounting height 24 mm installation width 28.5 mm installation depth 29 mm ortificates/ approvals General Product Approval General Product Approval Marine / Shipping Open and the statistication width 28.5 mm Marine / Shipping other Open and the statistication width 10.5 mm Simens has decided to exit the Russian market (see here). https://press.ismens.com/global/an/pressretease/simens-wind-down-russian-business Simens has decided to exit the Russian market (see here). https://press.ismens.com/global/an/pressretease/simens-wind-down-russian-business Simens has decided to exit the Russian market (see here). https://press.ismens.com/global/an/pressretease/simens-wind-down-russian-business Simens is according other enrewal of the current EAC certificates. Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russian Balanou.). Information https://www.geners.com/global/an/pressretease/siemens.com/global/an/pressretease/siemens.com/global/an/pressretases/siemens.com/global/an/prestases/siemens.						
shape of the installation opening round mounting diameter 22 mm mounting height 24 mm installation width 28 5 mm installation depth 29 mm ortificates/ approvals General Product Approval General Product Approval Marine / Shipping Image: Statistic statis						
mounting diameter 22 mm mounting height 24 mm installation width 28.5 mm installation depth 29 mm certificates/approvals 29 mm Ceneral Product Approval Marine / Shipping Image of the state of the states of the sta			front mounting			
Installation width 24 mm Installation width 28.5 mm Installation depth 29 mm ertificates/ approvals General Product Approval Ceneral Product Approval Marine / Shipping other Confirmation Miscellaneous Simens has decided to exit the Russian market (see here). https://www.semens.com/collen/lnv/ressentease/siemens.wind-down-russian-business Simens is working on the renewal of the current EAC certificates. Please contact your local Simens Somice Automation 45AEU member states Russia or Belarus). Information on the packaging Infuscionation Citations Somice Automation 45AEU member states Russia or Belarus). Information and Downloadcenter (Catalogs, Brochures,) https://www.semens.com/csi/wwien/ide/auti.asox?lang=en&mlh=35B3500-2EA11 Caxonine generator Into:/isoport.automation.simens.com/w/W/CAXorder/default.asox?lang=en&mlh=35B3500-2EA11 Caxonine generator http://support.automation.simens.com/rus/wien/simesion drawing, 3D models, device circuit diagrams, EPLAN macros,)	shape of the installation opening		round			
installation width 28.5 mm Installation dopth 29 mm Central Product Approvals General Product Approvals General Product Approval	mounting diameter					
Installation depth 29 mm retificates/ approvals General Product Approval	mounting height	24 mm				
General Product Approval Marine / Shipping General Product Approval Image: Constraint of the second sec	installation width	28.5 mm				
General Product Approval Marine / Shipping General Product Approval Marine / Shipping Warine / Shipping Different Control of Contro	installation depth	29 mm				
Warine / Shipping Image: I	Certificates/ approvals					
Marine / Shipping other	General Product Approval	Marine / Shipping				
wither information Wither information Siemens has decided to exit the Russian market (see here). https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business Siemens is working on the renewal of the current EAC certificates. Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus). Information on the packaging https://pupret.industry.siemens.com/cs/ww/en/view/109813875 Information - and Downloadcenter (Catalogs, Brochures,) https://www.siemens.com/c10 Industry Mall (Online ordering system) https://support.automation.siemens.com//WV/CAXorder/default.aspx?lang=en&mlfb=3SB3500-2EA11 Cax online generator http://support.industry.siemens.com/www.chaysers.statustics, FAQs,) http://support.automation.siemens.com/www.chaysers/sb3500-2EA11 Service&Support (Manuals, Certificates, Characteristics, FAQs,) https://support.industry.siemens.com/cs/ww/en/ps/SSB3500-2EA11 Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros,)		Lloyd's Register urs	PRS	RINA		
wither information Siemens has decided to exit the Russian market (see here). https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business Siemens is working on the renewal of the current EAC certificates. Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus). Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875 Information- and Downloadcenter (Catalogs, Brochures,) https://support.industry.siemens.com/cs/ww/en/view/109813875 Information- and Downloadcenter (Catalogs, Brochures,) https://www.siemens.com/cs/ww/en/View/109813875 Information- and Downloadcenter (Catalogs, Brochures,) https://support.industry.siemens.com/cs/ww/en/View/109813875 Information- and Downloadcenter (Catalog/product?mlfb=3SB3500-2EA11 Cax online generator http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SB3500-2EA11 Service&Support (Manuals, Certificates, Characteristics, FAQs,) https://support.industry.siemens.com/cs/ww/en/ps/3SB3500-2EEA11 Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros,)						
Siemens has decided to exit the Russian market (see here). https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business Siemens is working on the renewal of the current EAC certificates. Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus). Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875 Information- and Downloadcenter (Catalogs, Brochures,) https://www.siemens.com/ic10 Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/Catalog/product?mlfb=3SB3500-2EA11 Cax online generator http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SB3500-2EA11 Service&Support (Manuals, Certificates, Characteristics, FAQs,) https://support.industry.siemens.com/cs/ww/en/pi/3SB3500-2EA11 Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros,)	EMISLEORA					
https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business Siemens is working on the renewal of the current EAC certificates. Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus). Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875 Information- and Downloadcenter (Catalogs, Brochures,) https://www.siemens.com/ic10 Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/Catalog/product?mlfb=3SB3500-2EA11 Cax online generator http://support.industry.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SB3500-2EA11 Service&Support (Manuals, Certificates, Characteristics, FAQs,) https://support.industry.siemens.com/cs/ww/en/ps/3SB3500-2EA11 Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros,)	urther information					
Siemens is working on the renewal of the current EAC certificates. Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus). Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875 Information- and Downloadcenter (Catalogs, Brochures,) https://www.siemens.com/ic10 Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/Catalog/product?mlfb=3SB3500-2EA11 Cax online generator http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SB3500-2EA11 Service&Support (Manuals, Certificates, Characteristics, FAQs,) https://support.industry.siemens.com/cs/ww/en/ps/3SB3500-2EA11 Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros,)	Siemens has decided to exit the Russian market (see here).					
Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus). Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875 Information- and Downloadcenter (Catalogs, Brochures,) https://www.siemens.com/ic10 Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/catalog/product?mlfb=3SB3500-2EA11 Cax online generator http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SB3500-2EA11 Service&Support (Manuals, Certificates, Characteristics, FAQs,) https://support.industry.siemens.com/cs/ww/en/ps/3SB3500-2EA11 Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros,)	· · · · · · · · · · · · · · · · · · ·					
https://support.industry.siemens.com/cs/ww/en/view/109813875 Information- and Downloadcenter (Catalogs, Brochures,) https://www.siemens.com/ic10 Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SB3500-2EA11 Cax online generator http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SB3500-2EA11 Service&Support (Manuals, Certificates, Characteristics, FAQs,) https://support.industry.siemens.com/cs/ww/en/ps/3SB3500-2EA11 Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros,)	Please contact your local Siemens office on the status of validity	of the EAC certification if you inten-	d to import or offer to sup	oply these products to an		
https://www.siemens.com/ic10 Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SB3500-2EA11 Cax online generator http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SB3500-2EA11 Service&Support (Manuals, Certificates, Characteristics, FAQs,) https://support.industry.siemens.com/cs/ww/en/ps/3SB3500-2EA11 Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros,)	https://support.industry.siemens.com/cs/ww/en/view/109813875					
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SB3500-2EA11 Cax online generator http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SB3500-2EA11 Service&Support (Manuals, Certificates, Characteristics, FAQs,) https://support.industry.siemens.com/cs/ww/en/ps/3SB3500-2EA11 Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros,)						
http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SB3500-2EA11 Service&Support (Manuals, Certificates, Characteristics, FAQs,) https://support.industry.siemens.com/cs/ww/en/ps/3SB3500-2EA11 Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros,)		lfb=3SB3500-2EA11				
Service&Support (Manuals, Certificates, Characteristics, FAQs,) <u>https://support.industry.siemens.com/cs/ww/en/ps/3SB3500-2EA11</u> Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros,)						
https://support.industry.siemens.com/cs/ww/en/ps/3SB3500-2EA11 Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros,)		· •	1			
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros,)	https://support.industry.siemens.com/cs/ww/en/ps/3SB3500-2EA	ري				

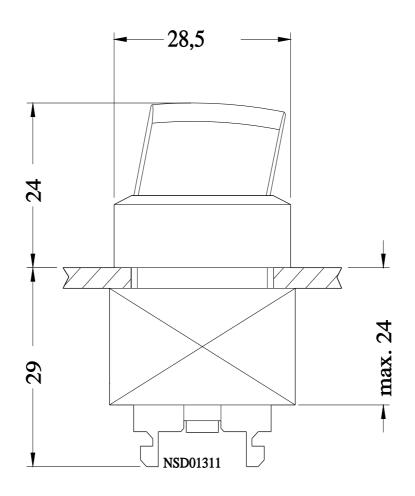

last modified:

