SIEMENS

Data sheet

3SB3500-4AD01



22MM ROUND METAL ACTUATOR: RONIS LOCK WITH 2 KEYS MAINTAINED CONTACT 2 SWITCH POSITIONS O-I LOCK NUMBER SB 30, REMOVE O WITH HOLDER POSSIBLE SPECIAL LOCKS FOR RONIS KEYSWITCHES: SB31, 455, 421 !!! Phased-out product !!! SIRIUS ACT 3SU1 is suc Preferred successor ty >>3SU1050-4BF01-0AA0 + 3SU1550-0AA10-0AA0<<


design of the product	Single device round				
Enclosure					
number of command points	1				
Actuator					
design of the actuating element	Key-operated switch				
principle of operation of the actuating element	latching				
product extension optional light source	No				
color of the actuating element	silver				
material of the actuating element	metal				
outer diameter of the actuating element	28.5 mm				
type of unlocking device	key unlatching				
number of switching positions	2				
switch position for key distraction	0				
actuating angle					
clockwise	50°				
lock make	RONIS				
Front ring					
product component front ring	Yes				
design of the front ring	Standard				
material of the front ring	metal				
color of the front ring	silver				
Holder					
material of the holder	Metal				
General technical data					
product function					
EMERGENCY OFF function	No				
EMERGENCY STOP function	No				
protection class IP	IP67				
vibration resistance according to IEC 60068-2-6	20 200 Hz: 5g				
operating frequency maximum	1 000 1/h				
mechanical service life (operating cycles) typical	300 000				
reference code according to IEC 81346-2	S				
Substance Prohibitance (Date)	07/01/2006				
Connections/ Terminals					
tightening torque of the screws in the bracket	1.4 1.6 N·m				
Ambient conditions					
ambient temperature					
during operation	-25 +70 °C				
during storage	-40 +80 °C				

environmental category during operation according to IEC 60721		ig to IEC 31	3K6		
Installation/ mounting/	dimensions				
fastening method			front mounting		
shape of the installation opening		rc	round		
mounting diameter		22	22 mm		
mounting height			44 mm		
installation width			28.5 mm		
installation depth	allation depth 29 mm				
Certificates/ approvals			-		
General Product Approval Marine / Shipping					
(Standard	U	EHC	Lloyd's Register urs	PRS	RINA
Marine / Shipping	other				
DNV-GL DWGLCDRAP	Miscellaneous	<u>Confirmation</u>			
Further information	to ovit the Duccion moul				
Siemens has decided to exit the Russian market (see here). https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business					
Siemens is working o Please contact your loc EAC relevant market (c Information on the pa https://support.industry	n the renewal of the curr cal Siemens office on the s other than the sanctioned E ckaging .siemens.com/cs/ww/en/vie	ent EAC certificates tatus of validity of the AEU member states ew/109813875	EAC certification if you intend	I to import or offer to sup	ply these products to an
Information- and Downloadcenter (Catalogs, Brochures,) https://www.siemens.com/ic10					

Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SB3500-4AD01

Cax online generator http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SB3500-4AD01 Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3SB3500-4AD01 Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SB3500-4AD01&lang=en

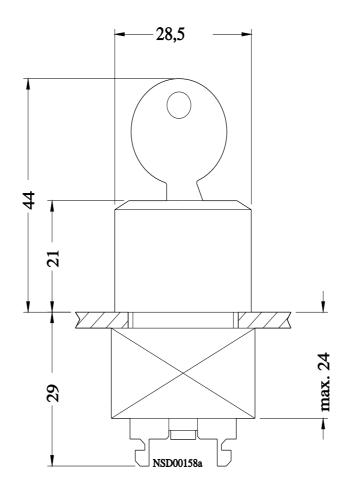

last modified:

12/21/2020 🖸