



22MM METAL ROUND ACTUATOR: ILLUMINATED
PUSHBUTTON WITH FLAT BUTTON ILLUMINABLE INCL.
HOLDER FOR 3 ELEMENTS WITH HOLDER WHITE,
SOLVENT-RESISTANT NOT INSCRIBABLE WITH LASER

Actuator / signaling device:

| | | |
|---|----|------------------------|
| Design of the product | | Single device round |
| Design of the operating mechanism | | Illuminated pushbutton |
| External diameter / of the activation element | mm | 28.5 |
| Type of unlocking device | | without |
| Color / of the activation element | | White |
| Material / of the activation element | | plastic |
| Shape / of the activation element | | Flat pushbutton |
| Number of switching positions | | 2 |
| Product component / front ring | | Yes |
| Material / of the front ring | | metal |
| Color / of the front ring | | silver |
| Design of the front ring | | Standard |
| Product function / EMERGENCY STOP function | | No |

Holder:

| | | |
|--------------------------|--|-------|
| Material / of the holder | | Metal |
|--------------------------|--|-------|

General technical details:

| | | |
|--------------------------|--|--|
| Resistance against shock | | |
|--------------------------|--|--|

| | | |
|---|---------------------|---------------------------------------|
| <ul style="list-style-type: none"> • for devices with incandescent lamp / according to IEC 60068-2-27 • for devices without incandescent lamp / according to IEC 60068-2-27 | | <p><= 30g</p> <p><= 50g</p> |
| Resistance against vibration / according to IEC 60068-2-6 | | 20 ... 200 Hz: 5g |
| Operating cycles / maximum | 1/h | 1,000 |
| Mechanical operating cycles as operating time / typical | | 3,000,000 |
| Product extension / optional / fluorescent materials | | Yes |
| Item designation <ul style="list-style-type: none"> • according to DIN EN 61346-2 • according to DIN 40719 extendable after IEC 204-2 / according to IEC 750 | | <p>S</p> <p>S</p> |
| Tightening torque / of the screws in the bracket / maximum | N·m | 1 |
| Ambient temperature <ul style="list-style-type: none"> • during operating • during storage | <p>°C</p> <p>°C</p> | <p>-25 ... +70</p> <p>-40 ... +80</p> |
| Protection class IP | | IP67 |
| climatic class / during the operating phase / according to EN 60721 | | 3K6 |
| Type of mounting | | front mounting |
| Shape / of the installation hole | | round |
| Installation width | mm | 28.5 |
| Mounting diameter | mm | 22 |
| Mounting height | mm | 12 |
| Mounting depth | mm | 29 |

Certificates/approvals:

General Product Approval



Test Certificates

[Special Test Certificate](#)

Shipping Approval



other

[Confirmation](#)


[other](#)

[Environmental Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

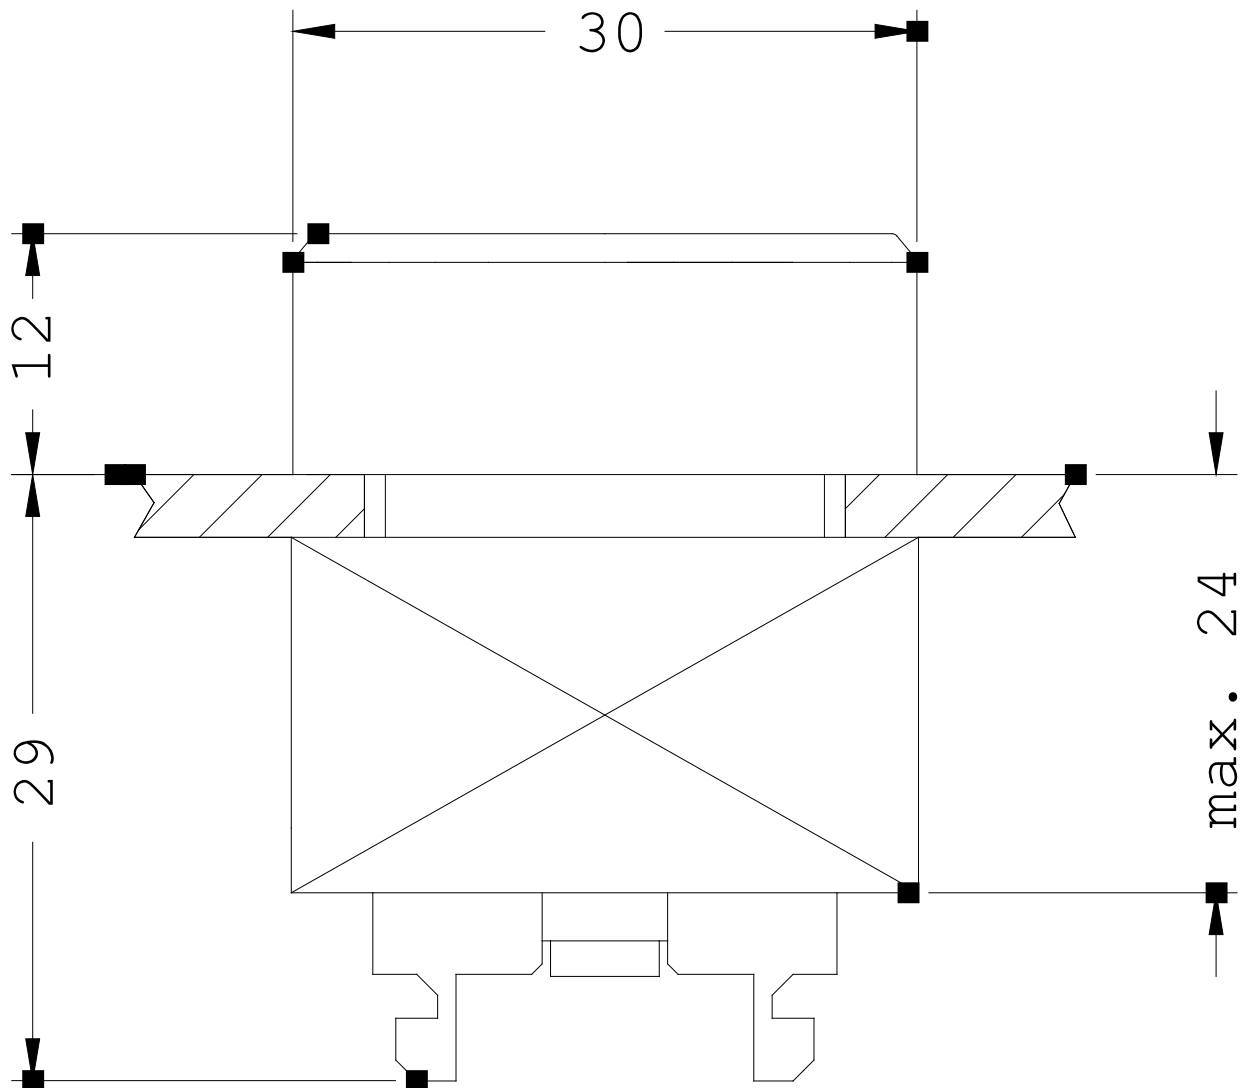

last change:

Jan 21, 2013