

22MM METAL ROUND ACTUATOR: PUSH-PULL BUTTON  
40MM LATCHING W.PULL-TO-UNLOCK MECH.  
ILLUMINABLE INCL. HOLDER FOR 3 ELEMENTS WITH  
HOLDER BLUE

### Actuator:

Design of the operating mechanism		push-pull button, Ø 40 mm
Shape / of the activation element		round
Manner of function / of the activation element		Yes No
<ul style="list-style-type: none"> <li>• arresting lock</li> <li>• tentative</li> </ul>		
Outer diameter / of the activation element	mm	40
Material / of the activation element		plastic

### Button:

Design of the button		raised
Color / of the button		blue

### Front ring:

Material / of the front ring		metal
Color / of the front ring		silver

### General technical details:

Design of the product		Ø 40 mm
Number of control points		1
Number of indicator lights / installable		1
Number of switching positions		2
Product extension / optional / fluorescent materials		Yes
Product function / emergency-OFF function		No
Type of unlocking device		pull-to-unlatch mechanism
Resistance against shock		<= 30g <= 50g
<ul style="list-style-type: none"> <li>• for devices with incandescent lamp / according to IEC 60068-2-27</li> <li>• for devices without incandescent lamp / according to IEC 60068-2-27</li> </ul>		
Operating cycles / maximum	1/h	1,000
Resistance against vibration / according to IEC 60068-2-6		20 ... 200 Hz: 5g
Mechanical operating cycles as operating time / typical		300,000

<b>Item designation</b>		
<ul style="list-style-type: none"> <li>• according to DIN 40719 extendable after IEC 204-2 / according to IEC 750</li> <li>• according to DIN EN 61346-2</li> </ul>		S
		S

#### Auxiliary Contacts:

<b>Number of NC contacts / for auxiliary contact</b>		0
<b>Number of NO contacts / for auxiliary contact</b>		0
<b>Number of change-over switches / for auxiliary contact</b>		0







#### Installation/mounting/dimensions:

<b>Color / of the lens</b>		blue
<b>Product component / front ring</b>		Yes
<b>Material / of the housing</b>		metal
<b>Type of mounting</b>		front mounting
<b>Installation width</b>	mm	22
<b>Shape / of the installation hole</b>		round
<b>Mounting diameter</b>	mm	22
<b>Height</b>	mm	40
<b>Width</b>	mm	40
<b>Depth</b>	mm	53.5
<b>Tightening torque / of the screws in the holder / maximum</b>	N·m	1


#### Ambient conditions:

<b>Ambient temperature</b>		
<ul style="list-style-type: none"> <li>• during the operating phase</li> <li>• during storage</li> </ul>	°C	70 ... -25
	°C	-40 ... 80
<b>Protection class IP</b>		IP67
<b>Climatic class / according to DIN EN ISO 6270-2</b>		KTW24

#### Certificates/approvals:

<b>General Product Approval</b>	<b>Test Certificates</b>	
 	<a href="#">Manufacturer</a>	
<b>Shipping Approval</b>		
<a href="#">ABS</a>    <a href="#">PRS</a> 		
<b>other</b>		
<a href="#">Manufacturer</a>		

#### Further information:

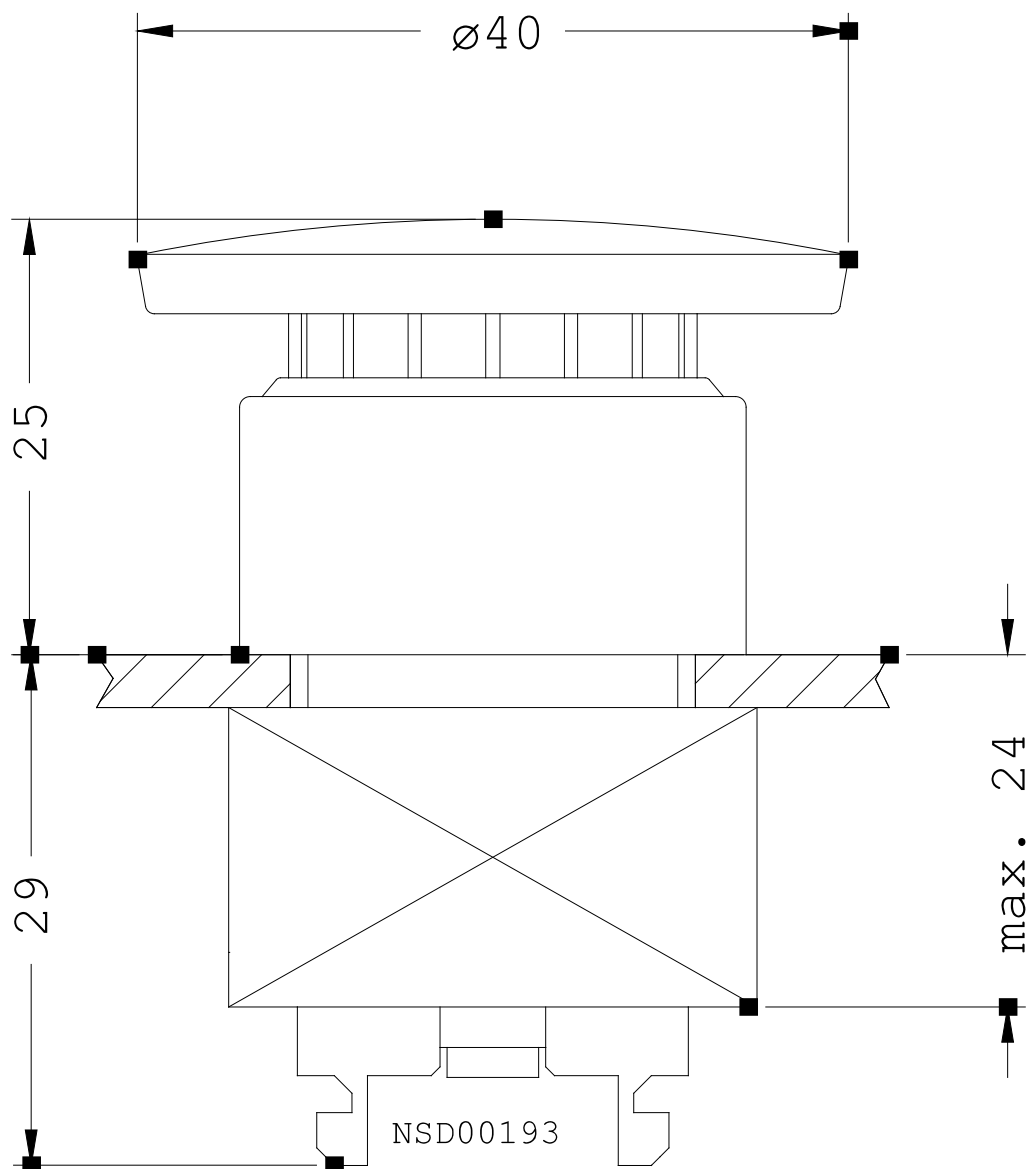

last change:

Sep 6, 2010