SIEMENS

Data sheet

3SB3802-0AA3



ENCLOSURE FOR 22MM PROGRAM PLASTIC VERSION 2 COMMAND POSITIONS GRAY TOP PART !!! Phased-out product !!! SIRIUS ACT 3SU1 is successor Preferred successor type is >>3SU1802-0AA00-0AB1<<

| Enclosure | | | | |
|--|--|--|--|--|
| design of the housing | Empty enclosure for command and signaling devices | | | |
| shape of the enclosure front | rectangular | | | |
| material of the enclosure | plastic | | | |
| number of command points | 2 | | | |
| product component protective collar | No | | | |
| color of the enclosure top part | grey | | | |
| delivery state | | | | |
| ● as a kit | No | | | |
| pre-wired on strip terminal | No | | | |
| fastening method of the enclosure | Vertical / horizontal | | | |
| Actuator | | | | |
| product feature | | | | |
| lockout | No | | | |
| product extension optional light source | Yes | | | |
| Front ring | | | | |
| product component front ring | No | | | |
| General technical data | | | | |
| product function | | | | |
| positive opening | No | | | |
| EMERGENCY STOP function | No | | | |
| product component | | | | |
| light source | No | | | |
| stand/pedestal | No | | | |
| protection class IP | IP65 | | | |
| vibration resistance according to IEC 60068-2-6 | 20 200 Hz: 5g | | | |
| reference code according to IEC 81346-2 | U | | | |
| Substance Prohibitance (Date) | 07/01/2006 | | | |
| Connections/ Terminals | | | | |
| type of electrical connection on enclosure | Cable routing above, below / left, right, each 1 x M20 | | | |
| Ambient conditions | | | | |
| ambient temperature | | | | |
| during operation | -25 +70 °C | | | |
| during storage | -40 +80 °C | | | |
| environmental category during operation according to IEC 60721 | 3K6 | | | |
| Installation/ mounting/ dimensions | | | | |
| fastening method of contact blocks, socket, and accessories | Floor mounting / front mounting (1-pole) | | | |
| height | 114 mm | | | |
| width | 85 mm | | | |

| depth | | 64 m | m | | |
|--|---|---|------------------------------|--------------------------------|------------------------|
| shape of the installation opening | | round | 1 | | |
| mounting diameter | | 22 m | m | | |
| Accessories | | | | | |
| number of labels | | 2 | | | |
| product component holder for 3 switching elements | | ements No | | | |
| Certificates/ approvals | | | | | |
| General Product Approval | | | | Marine / Shipping | |
| SP M | | | EHC | Llovd's Register uis | PRS |
| Marine / Shipping | other | | | | |
| DNV-GL | <u>Confirmation</u> | | | | |
| https://press.siemens.co Siemens is working ou Please contact your loc EAC relevant market (o Information on the par | n the renewal of the cur al Siemens office on the s ther than the sanctioned l ckaging | e/siemens-wind-down-rus rent EAC certificates. status of validity of the EA EAEU member states Rus | C certification if you inter | id to import or offer to suppl | y these products to an |
| https://support.industry. | siemens.com/cs/ww/en/v | | | | |
| Information and David | nloadcenter (Catalogs, I | | | | |

https://www.siemens.com/ic10 Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SB3802-0AA3

Cax online generator


 $\underline{http://support.automation.siemens.com/WW/CAX order/default.aspx?lang=en\&mlfb=3SB3802-0AA3$

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3SB3802-0AA3

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SB3802-0AA3&lang=en

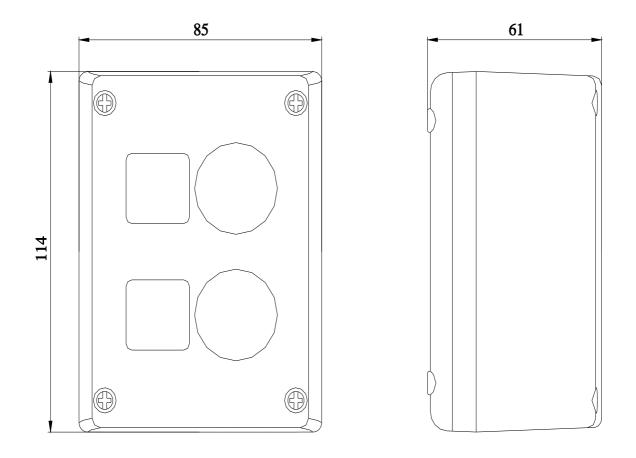

last modified:

1/18/2021 🖸