

Foot switch molded-plastic enclosure Pedal switch 1-pedal without cover, 1 change-over contact



product brand name	SIRIUS
product designation	momentary-contact foot switch
product type designation	3SE39
suitability for use safety switch	No
General technical data	
protection class IP	IP65
reference code according to IEC 81346-2	S
Substance Prohibitance (Date)	07/01/2006
number of switching steps	1
number of the actuation pedals	1
Ambient conditions	
ambient temperature during operation	-10 ... +75 °C
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
operational current at AC-15 at 230 V rated value	5 A
Enclosure	
material of the enclosure	plastic with total insulation
color	
• of the enclosure	black
• of the enclosure top part	black
Actuator	
product feature	
• interlock	No
• latching	No
cable entry type	cable, 3 m
Installation/ mounting/ dimensions	
fastening method	screw fixing
height	96 mm
width	71 mm
depth	27 mm
Certificates/ approvals	
General Product Approval	Declaration of Conformity



[Confirmation](#)





EG-Konf.

[Miscellaneous](#)

LRS



PRS

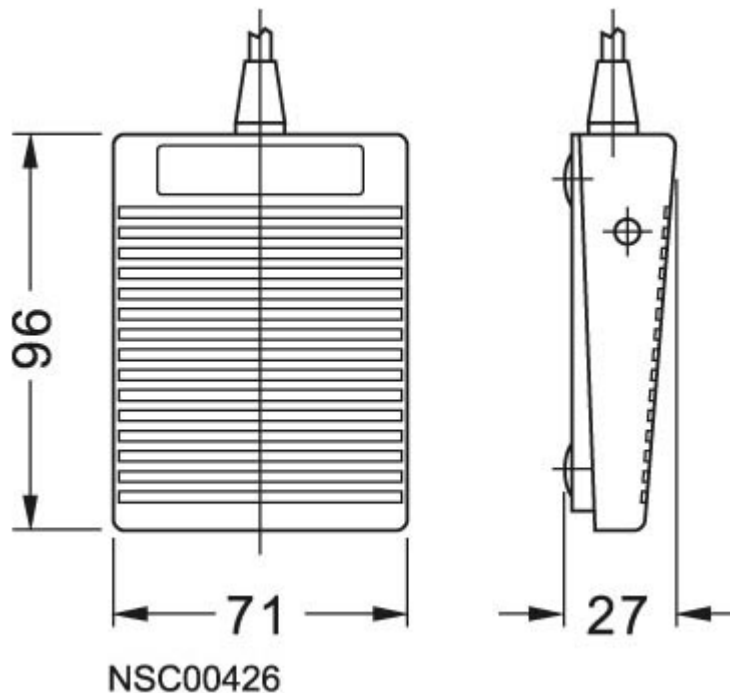


RINA



DNV-GL

other

[Confirmation](#)**Further information****Information on the packaging**<https://support.industry.siemens.com/cs/ww/en/view/109813875>**Information- and Downloadcenter (Catalogs, Brochures,...)**<https://www.siemens.com/ic10>**Industry Mall (Online ordering system)**<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SE3902-4CB20>**Cax online generator**<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SE3902-4CB20>**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**<https://support.industry.siemens.com/cs/ww/en/ps/3SE3902-4CB20>**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SE3902-4CB20&lang=en

last modified:

2/12/2021