



Adjustable-length Twist lever for position switch 3SE51/52 Metal lever 100 mm long Positive fit (grid hole) plastic roller 19 mm

|                                                          |                                                                                           |
|----------------------------------------------------------|-------------------------------------------------------------------------------------------|
| product brand name                                       | SIRIUS                                                                                    |
| product designation                                      | actuator for part-turn actuator                                                           |
| product type designation                                 | 3SE5                                                                                      |
| <b>General technical data</b>                            |                                                                                           |
| product function positive opening                        | Yes                                                                                       |
| shock resistance                                         |                                                                                           |
| • according to IEC 60068-2-27                            | 30g / 11 ms                                                                               |
| • for railway applications according to EN 61373         | Category 1, Class B                                                                       |
| vibration resistance                                     |                                                                                           |
| • according to IEC 60068-2-6                             | 0.35 mm/5g                                                                                |
| • for railway applications according to EN 61373         | Category 1, Class B                                                                       |
| mechanical service life (switching cycles) typical       | 15 000 000                                                                                |
| reference code according to IEC 81346-2                  | T                                                                                         |
| active principle                                         | mechanical                                                                                |
| Substance Prohibitance (Date)                            | 07/01/2006                                                                                |
| <b>Ambient conditions</b>                                |                                                                                           |
| ambient temperature                                      |                                                                                           |
| • during operation                                       | -40 ... +85 °C                                                                            |
| • during storage                                         | -40 ... +90 °C                                                                            |
| explosion protection category for dust                   | none                                                                                      |
| <b>Enclosure</b>                                         |                                                                                           |
| coating of the enclosure                                 | Other types                                                                               |
| <b>Drive Head</b>                                        |                                                                                           |
| design of the actuating element                          | Adjustable twist lever, adjustable-length metal lever with latching, plastic roller 19 mm |
| shape of the switch head                                 | roller                                                                                    |
| outer diameter of the switch head                        | 19 mm                                                                                     |
| <b>Installation/ mounting/ dimensions</b>                |                                                                                           |
| mounting position                                        | any                                                                                       |
| fastening method                                         | screw fixing                                                                              |
| design of the interface for safety-related communication | without                                                                                   |
| <b>Communication/ Protocol</b>                           |                                                                                           |
| design of the interface                                  | without                                                                                   |
| <b>Certificates/ approvals</b>                           |                                                                                           |
| General Product Approval                                 |                                                                                           |



[Confirmation](#)



[KC](#)





[Type Test Certificates/Test Report](#)

[Confirmation](#)

#### Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SE5000-0AA60-1AJ0>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SE5000-0AA60-1AJ0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SE5000-0AA60-1AJ0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3SE5000-0AA60-1AJ0&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SE5000-0AA60-1AJ0&lang=en)

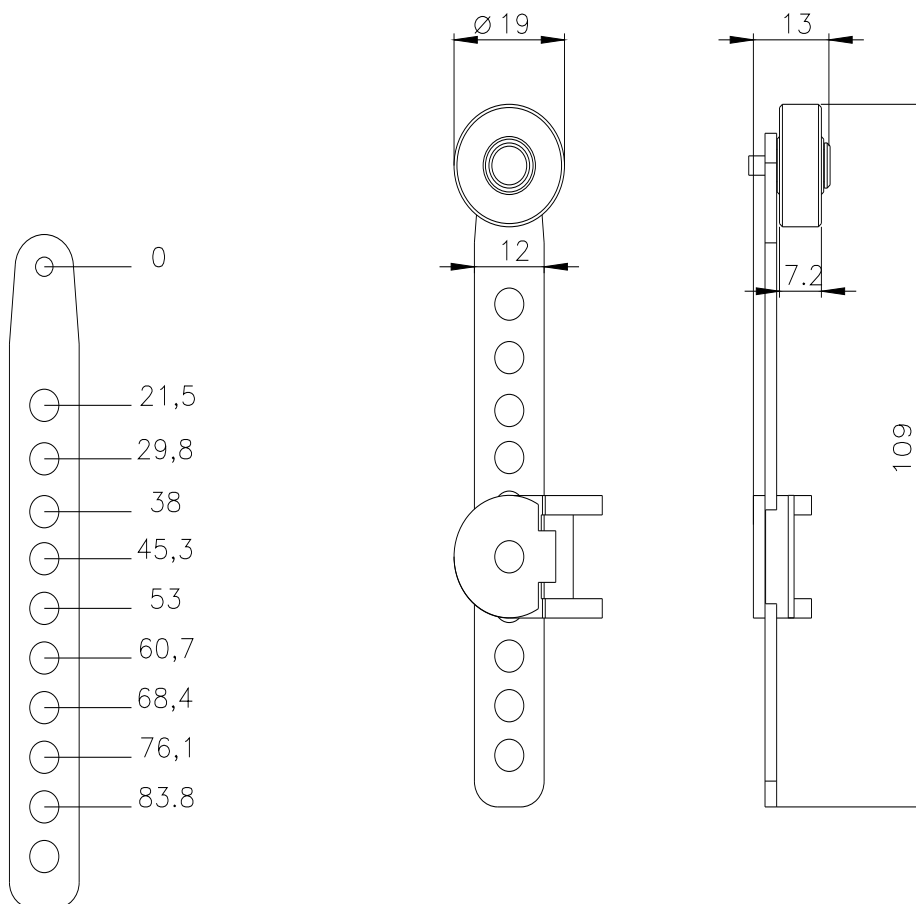

last modified:

12/21/2020