## **SIEMENS**

Product data sheet 3SE5232-0LC05



## Manufacturer article number

• of the basic unit included in the scope of supply

3SE5232-0LC05

General technical details:					
product designation		standard position switch			
Insulation voltage					
• rated value	V	400			
Degree of pollution		class 3			
Thermal current	Α	6			
Operating current					
• at AC-15					
• at 24 V / rated value	Α	6			
• at 125 V / rated value	Α	6			
• at 230 V / rated value	Α	1.5			
• at DC-13					
• at 24 V / rated value	Α	3			
• at 125 V / rated value	Α	0.55			
• at 230 V / rated value	Α	0.27			
Continuous current					
• of the slow DIAZED fuse link	Α	6			
• of the quick DIAZED fuse link	Α	10			

of the C characteristic circuit breaker	Α	1	
Mechanical operating cycles as operating time			
• typical		15,000,000	
Electrical operating cycles as operating time			
<ul> <li>with contactor 3RH11, 3RT1016, 3RT1017, 3RT1024, 3RT1025, 3RT1026 / typical</li> </ul>		10,000,000	
• at AC-15 / at 230 V / typical		100,000	
Electrical operating cycles in one hour			
• with contactor 3RH11, 3RT1016, 3RT1017, 3RT1024, 3RT1025, 3RT1026		6,000	
Repeat accuracy	mm	0.1	
Design of the contact element		snap-action contacts	
Number of NC contacts			
for auxiliary contacts		2	
Design of the switching function		positive opening	
Number of NO contacts			
for auxiliary contacts		1	
Resistance against vibration		0.35 mm / 5g	
Resistance against shock		30g / 11 ms	
Ambient temperature			
during the operating phase	°C	-25 85	
during storage	°C	-40 90	
Product specification			
• for dimensions		EN 50047	
Width of the sensor	mm	31	
material			
of the housing		plastic	
Material / of the housing / of the switch head		plastic	
Design of the operating mechanism		teflon plunger	
Actuating speed	mm/s / m/s	0.1 1.5	
Minimum actuating force / in activation direction	N	20	
Protection class IP		IP65	
Built in orientation		any	
design of the cable entry (gland)		1x (M20 x 1.5)	
Design of the electrical connection		screw-type terminals	
Item designation			
<ul> <li>according to DIN 40719 extendable after IEC 204-2</li> </ul>		s	
• according to DIN EN 61346-2		В	

## Certificates/approvals:

General I	Product Approval	Functional Safety / Safety of Machinery	Test Certificates	other
CQC	(ŲL)	<u>TÜV</u>	other	Manufacturer

## Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)

http://www.siemens.com/industrial-controls/mall

**CAx-Online-Generator** 


http://www.siemens.com/cax


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

http://support.automation.siemens.com/WW/view/en/3SE5232-0LC05/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

 $\underline{\text{http://www.automation.siemens.com/bilddb/cax\_en.aspx?mlfb=3SE5232-0LC05}}$ 

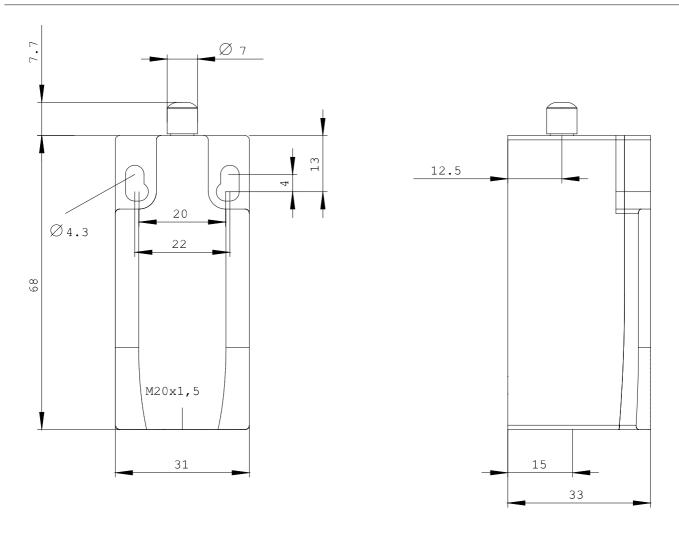

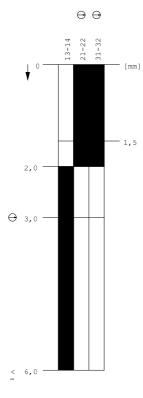

last change: Jan 11, 2011