



Magnet switch Contact block 25 x 88 mm for door hinge on the left Contact elements: Safety contacts 2 NC Signaling contact 1 NC with connecting cable 3 m without LED, the matching solenoid 3SE6714-2CA or offset by 90° 3SE6724-2CA

product brand name
product designation
design of the product
product type designation
suitability for use safety-related circuits

SIRIUS
Magnetically operated switch
Rectangular sensor unit
3SE66
Yes

General technical data

product function
• positive opening
• control function for downstream devices
• cross-circuit/short-circuit recognition
type of voltage of the operating voltage
protection class IP
shock resistance according to IEC 60068-2-27
vibration resistance according to IEC 60068-2-6
reference code according to IEC 81346-2
Substance Prohibitance (Date)
height of the sensor
length of the sensor
width of the sensor
material of the active sensor area
mechanical installation condition for sensor

No
No
Yes
DC
IP67
Sinusoidal half-wave 30g / 11 ms
10 ... 55 Hz: 1 mm
S
07/01/2006
25 mm
13 mm
88 mm
Plastic, glass-fiber reinforced thermoplastic
can be installed almost flush

Ambient conditions

ambient temperature during operation -25 ... +70 °C

Control circuit/ Control

type of voltage
operating voltage rated value
operational current rated value
operating power rated value
number of NC contacts for auxiliary contacts
number of NC contacts safety-related
number of NO contacts for auxiliary contacts
number of NO contacts safety-related

DC
75 V
400 mA
10 W
3
2
0
0

Enclosure

material of the enclosure
opening direction of the door
material of cable sheath

Plastic, glass-fiber reinforced thermoplastic
left
PVC

Actuator

design of the actuating element

magnet

Display

evaluation unit required

yes

Contact		
switching frequency	5 Hz	
assured operating distance OFF	17 mm	
assured operating distance ON	7 mm	
design of the switching function	NC contact	
number of switching contacts for signaling function	1	
• safety-related	0	
Installation/ mounting/ dimensions		
fastening method	screw fixing	
Connections/ Terminals		
type of electrical connection	cable	
wire length	3 m	
Inputs/ Outputs		
number of semiconductor outputs		
• for signaling function	0	
• safety-related	0	
number of outputs as contact-affected switching element		
• as NC contact		
— for signaling function instantaneous contact	1	
— safety-related instantaneous contact	2	
• as NO contact safety-related instantaneous contact	0	
Safety related data		
B10 value with high demand rate according to SN 31920	12 500 000	
Safety Integrity Level (SIL) according to IEC 61508	3	
performance level (PL) according to EN ISO 13849-1	e	
proportion of dangerous failures		
• with low demand rate according to SN 31920	50 %	
• with high demand rate according to SN 31920	50 %	
T1 value for proof test interval or service life according to IEC 61508	20 a	
category according to EN 954-1	4	
Certificates/ approvals		
General Product Approval	EMC	Functional Safety/Safety of Machinery

[Confirmation](#)



[Miscellaneous](#)

Declaration of Conformity

other



[Confirmation](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SE6617-2CA04>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SE6617-2CA04>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SE6617-2CA04>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SE6617-2CA04&lang=en

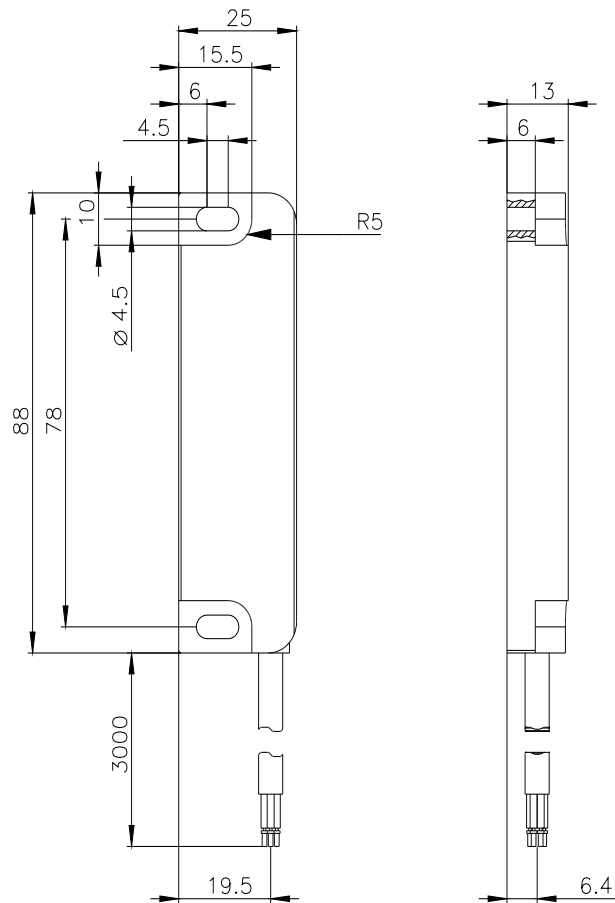

GN = Green	→	21
YE = Yellow	→	22
GY = Grey	→	11
PK = Pink	→	12
WH = White	→	31
BN = Brown	→	32

