



SIRIUS safety relay Basic unit Advanced series with time delay 0.5-30 s  
 Relay enabling circuits 2 NO instantaneous 2 NO delayed  $U_s = 24 \text{ V DC}$   
 Spring-type terminal (push-in)

|   |  |
|---|--|
| product brand name  | SIRIUS   |
| product category  | Safety relays  |
| product designation                                       | safety relays  |
| design of the product                                     | Relay enabling circuits  |
| <b>General technical data</b>                             |  |
| protection class IP of the enclosure                      | IP20   |
| touch protection against electrical shock                 | finger-safe  |
| insulation voltage rated value                            | 300 V  |
| ambient temperature                                       |  |
| • during storage  | -40 ... +80 °C   |
| • during operation  | -25 ... +60 °C   |
| air pressure according to SN 31205                        | 90 ... 106 kPa   |
| relative humidity during operation                        | 10 ... 95 %  |
| installation altitude at height above sea level maximum   | 4 000 m; Derating, see Product Notification 109792701  |
| vibration resistance according to IEC 60068-2-6           | 5 ... 500 Hz: 0.75 mm  |
| shock resistance  | 10g / 11 ms  |
| surge voltage resistance rated value                      | 4 000 V  |
| EMC emitted interference                                  | IEC 60947-5-1, Class A   |
| installation environment regarding EMC                    | This product is suitable for Class A environments only. In household environments, this device can cause unwanted radio interference. The user is required to implement appropriate measures in this case. |
| overvoltage category                                      | 3  |
| degree of pollution                                       | 3  |
| reference code according to IEC 81346-2                   | F  |
| power loss [W] maximum                                    | 2.5 W  |
| number of sensor inputs 1-channel or 2-channel            | 1  |
| design of the cascading                                   | yes  |
| type of the safety-related wiring of the inputs           | single-channel and two-channel   |
| product feature cross-circuit-proof                       | Yes  |
| Safety Integrity Level (SIL)                              |  |
| • according to IEC 62061                                  | 3  |
| • according to IEC 61508                                  | 3  |
| • for delayed release circuit according to IEC 61508      | SIL3   |
| performance level (PL)                                    |  |
| • according to ISO 13849-1                                | e  |
| • for delayed release circuit according to EN ISO 13849-1 | e  |
| category according to EN ISO 13849-1                      | 4  |
| Safe failure fraction (SFF)                               | 99 %   |
| PFHD with high demand rate according to EN 62061          | 3.7E-9 1/h   |
| PFDAvg with low demand rate according to IEC 61508        | 7E-6   |
| T1 value for proof test interval or service life          | 20 y   |

according to IEC 61508  
 hardware fault tolerance according to IEC 61508  
 safety device type according to IEC 61508-2

1  
 Type B

### Inputs/ Outputs

**number of outputs as contact-affected switching element**

- as NO contact
  - safety-related instantaneous contact
  - safety-related delayed switching

2  
 2

**stop category according to EN 60204-1**

0 / 1

**design of input**

- cascading input/functional switching
- feedback input
- start input

Yes  
 Yes  
 Yes

**type of electrical connection plug-in socket**

No

**operating frequency maximum**

360 1/h

**switching capacity current**

- of the NO contacts of the relay outputs
  - at DC-13
    - at 24 V
    - at 115 V
    - at 230 V
  - at AC-15
    - at 115 V
    - at 230 V

3 A  
 0.2 A  
 0.1 A  
 3 A  
 3 A

**thermal current of the switching element with contacts maximum**

5 A

**total current maximum**

12 A

**operational current at 17 V minimum**

5 mA

**mechanical service life (switching cycles) typical**

10 000 000

**design of the fuse link for short-circuit protection of the NO contacts of the relay outputs required**

gL/gG: 6A or circuit breaker type A: 3A or circuit breaker type B: 2A or circuit breaker type C: 1A

**wire length**

- with Cu 1.5 mm<sup>2</sup> and 150 nF/km per sensor circuit maximum

4 000 m

**make time with automatic start**

- at DC maximum

110 ms

**make time with automatic start after power failure**

- typical
- maximum

6 500 ms  
 6 500 ms

**make time with monitored start**

- maximum

110 ms

**backslide delay time after opening of the safety circuits typical**

40 ms

**backslide delay time in the event of power failure**

- typical
- maximum

30 ms  
 40 ms

**adjustable OFF-delay time after opening of the safety circuits**

0.5 ... 30

**recovery time after opening of the safety circuits typical**

30 ms

**recovery time after power failure typical**

6.5 s

**pulse duration**

- of the sensor input minimum
- of the ON pushbutton input minimum

75 ms  
 0.15 s

### Control circuit/ Control

**type of voltage of the control supply voltage**

DC

**control supply voltage**

- at DC
  - rated value

24 V

**operating range factor control supply voltage rated value of magnet coil**

- at DC

0.8 ... 1.2

### Installation/ mounting/ dimensions

**mounting position**

any

|   |                            |
|---|----------------------------|
| required spacing for grounded parts at the side | 5 mm                       |
| fastening method                                | screw and snap-on mounting |
| width   | 22.5 mm                    |
| height  | 100 mm                     |
| depth   | 121.6 mm                   |

#### Connections/ Terminals

|   |  |
|---|--|
| type of electrical connection   | spring-loaded terminal (push-in)   |
| type of connectable conductor cross-sections  | 1x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.5 ... 1.5 mm <sup>2</sup> )   |
| <ul style="list-style-type: none"> <li>• solid</li> <li>• finely stranded</li> <li>— with core end processing</li> <li>— without core end processing</li> </ul> | 1x (0.5 ... 1.0 mm <sup>2</sup> ), 2x (0.5 ... 1.0 mm <sup>2</sup> )<br>1x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.5 ... 1.5 mm <sup>2</sup> ) |
| type of connectable conductor cross-sections at AWG cables  | 1x (20 ... 16), 2x (20 ... 16)   |
| <ul style="list-style-type: none"> <li>• solid</li> <li>• stranded</li> </ul>   | 1x (20 ... 16), 2x (20 ... 16)   |

#### Product Function

|   |   |
|---|---|
| product function parameterizable  | sensor floating / sensor non-floating, monitored start-up / automatic start, 1-channel / 2-channel sensor connection, cross-circuit detection, startup testing, antivalent sensors, 2-hand switches, time delay |
| suitability for operation device connector 3ZY12  | Yes   |
| suitability for interaction press control   | Yes   |
| suitability for use   | Yes   |
| <ul style="list-style-type: none"> <li>• safety switch</li> <li>• monitoring of floating sensors</li> <li>• monitoring of non-floating sensors</li> <li>• magnetically operated switch monitoring</li> <li>• safety-related circuits</li> </ul> | Yes<br>Yes<br>Yes<br>Yes<br>Yes   |

#### Certificates/ approvals

|                          |     |
|--------------------------|-----|
| General Product Approval | EMC |
|--------------------------|-----|



[Confirmation](#)



|                                       |                           |                   |                   |
|---------------------------------------|---------------------------|-------------------|-------------------|
| Functional Safety/Safety of Machinery | Declaration of Conformity | Test Certificates | Marine / Shipping |
|---------------------------------------|---------------------------|-------------------|-------------------|

[Type Examination Certificate](#)



EG-Konf.

[Type Test Certificates/Test Report](#)



DNV



LRS



RINA

|                   |       |         |
|-------------------|-------|---------|
| Marine / Shipping | other | Railway |
|-------------------|-------|---------|



RMRS

[Confirmation](#)

[Confirmation](#)

#### Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)



<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SK1121-2CB42>


Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SK1121-2CB42>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SK1121-2CB42>

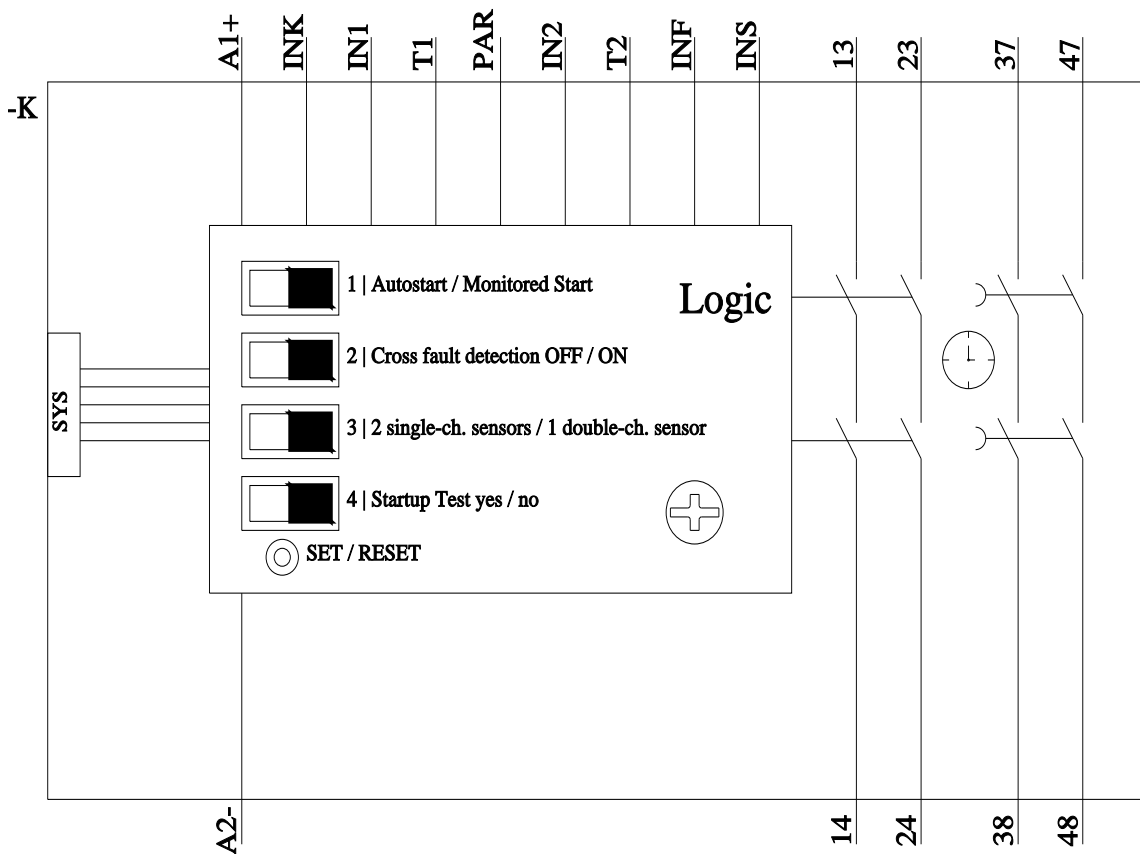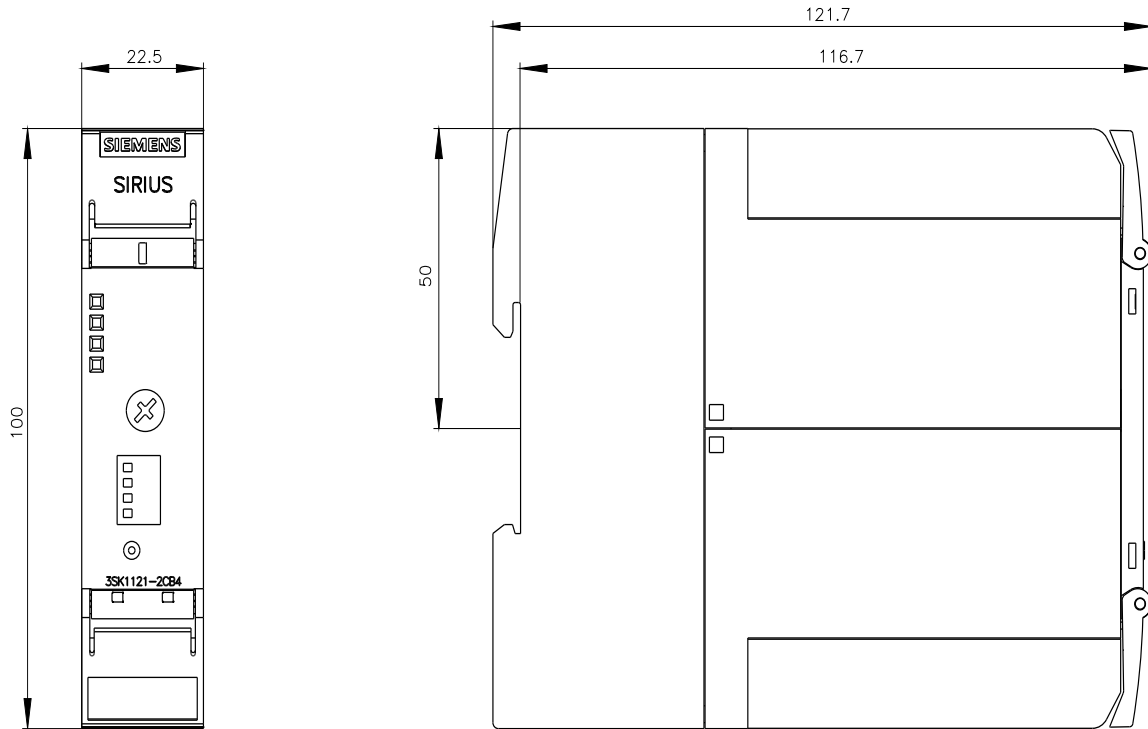

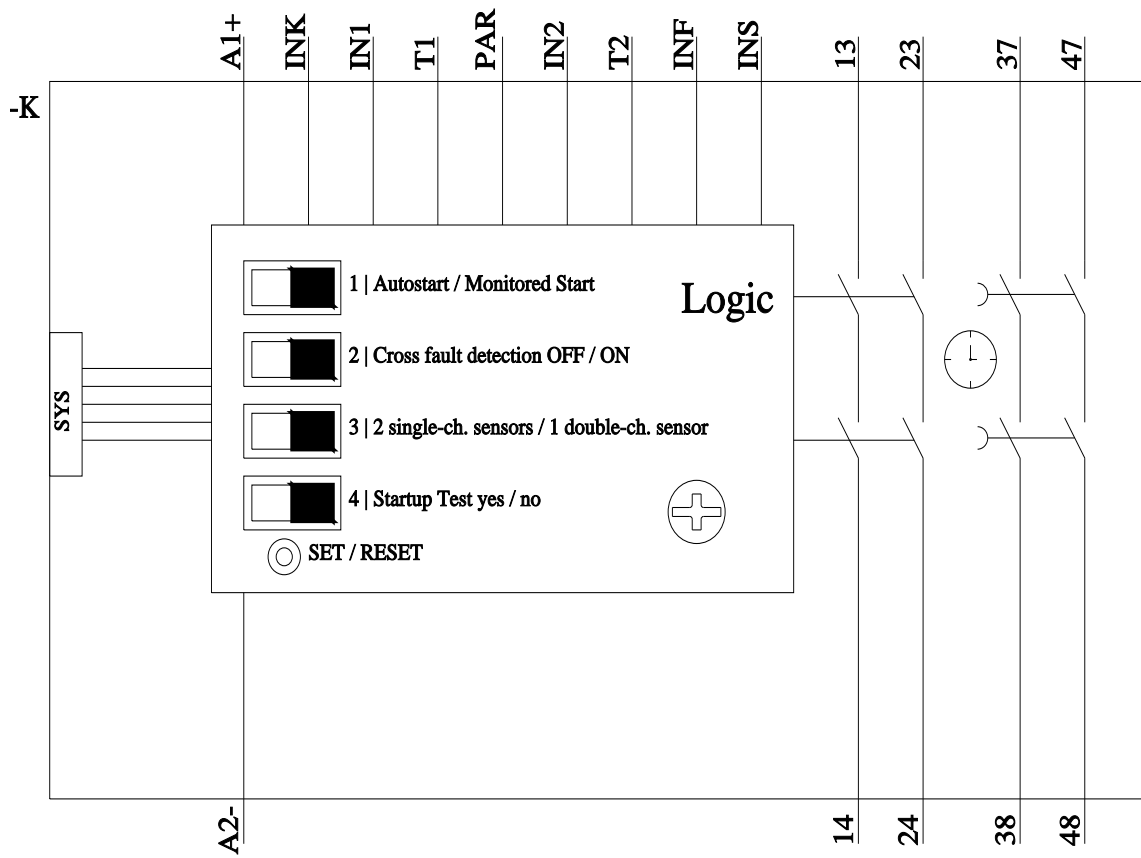

last modified:

9/29/2022