



Key-operated switch IKON, 22 mm, round, plastic with metal front ring, lock number 360012K1, with 2 keys, 3 switch positions I>O<II, momentary contact type, actuating angle 2x45°, 10:30h/12h/13:30h, Key removal O

product brand name
product designation
design of the product
product type designation
product line
manufacturer's article number of included key

SIRIUS ACT
Key-operated switches
Actuating/signaling element
3SU1
Plastic with metal front ring, matt, 22 mm
[3SU1950-0FR80-0AA0](#)

Actuator

principle of operation of the actuating element
product extension optional light source
color
• of the actuating element
material of the actuating element
shape of the actuating element
outer diameter of the actuating element
number of switching positions
switch position for key distraction
actuating angle
• clockwise
• anticlockwise
lock make
key number

momentary contact, 2x45° (10:30 h/12 h/13:30 h), return on both sides
No
silver
metal
Key
29.5 mm
3
O
45°
45°
ICON
360012K1

Front ring

product component front ring
design of the front ring
material of the front ring
color of the front ring

Yes
Standard
Metal, matt
sand gray

General technical data

protection class IP
• of the terminal
degree of protection NEMA rating
shock resistance
• according to IEC 60068-2-27
• for railway applications according to EN 61373
vibration resistance
• according to IEC 60068-2-6
• for railway applications according to EN 61373
operating frequency maximum
mechanical service life (operating cycles) typical
reference code according to IEC 81346-2
Substance Prohibitance (Date)

IP66, IP67, IP69(IP69K)
IP20
1, 2, 3, 3R, 4, 4X, 12, 13
sinusoidal half-wave 15g / 11 ms
Category 1, Class B
10 ... 500 Hz: 5g
Category 1, Class B
1 800 1/h
1 000 000
S
10/01/2014

Ambient conditions

ambient temperature

- during operation
- during storage

environmental category during operation according to IEC 60721

-25 ... +70 °C

-40 ... +80 °C

3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 ... 95%)

Installation/ mounting/ dimensions

height	29.5 mm
width	29.5 mm
shape of the installation opening	round
mounting diameter	22.3 mm
positive tolerance of installation diameter	0.4 mm
mounting height	56.2 mm
installation width	29.5 mm
installation depth	25.4 mm

Certificates/ approvals**General Product Approval****Declaration of Conformity**

[Confirmation](#)

**Test Certificates****Marine / Shipping**

[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)

**Marine / Shipping****other**

[Confirmation](#)

Further information**Information on the packaging**

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1030-5XM01-0AA0>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1030-5XM01-0AA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SU1030-5XM01-0AA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1030-5XM01-0AA0&lang=en

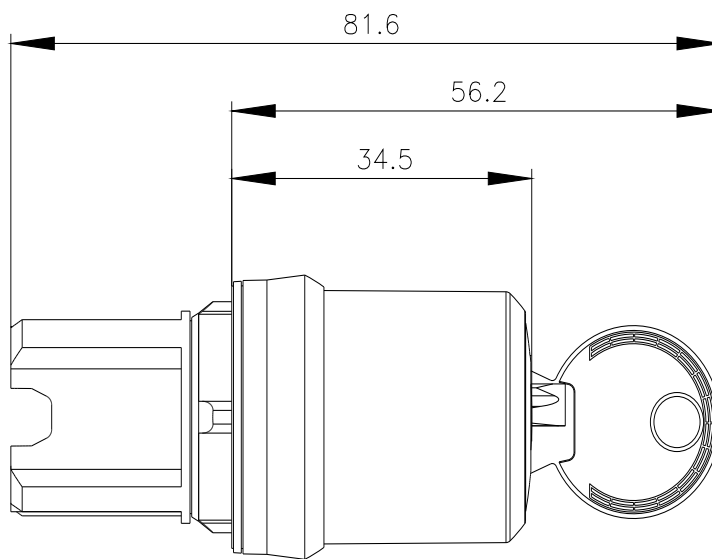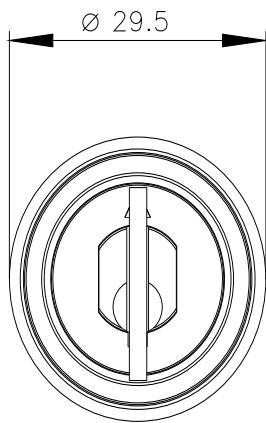

last modified:

1/26/2022 