



Selector switch, illuminable, 22 mm, round, plastic with metal front ring, blue, selector switch, short, 3 switch positions I>O<II, momentary contact type, actuating angle 2x45°, 10:30h/12h/13:30h

|                          |                                            |
|--------------------------|--------------------------------------------|
| product brand name       | SIRIUS ACT                                 |
| product designation      | Selector switches                          |
| design of the product    | Actuating/signaling element                |
| product type designation | 3SU1                                       |
| product line             | Plastic with metal front ring, matt, 22 mm |

### Enclosure

|                          |   |
|--------------------------|---|
| number of command points | 1 |
|--------------------------|---|

### Actuator

|                                                 |                                                                       |
|-------------------------------------------------|-----------------------------------------------------------------------|
| design of the actuating element                 | Selector, short                                                       |
| principle of operation of the actuating element | momentary contact, 2x45° (10:30 h/12 h/13:30 h), return on both sides |
| product extension optional                      |                                                                       |
| • light source                                  | Yes                                                                   |
| • contact module                                | Yes                                                                   |
| color of the actuating element                  | blue                                                                  |
| material of the actuating element               | plastic                                                               |
| shape of the actuating element                  | Handle                                                                |
| outer diameter of the actuating element         | 32.3 mm                                                               |
| number of switching positions                   | 3                                                                     |
| actuating angle                                 |                                                                       |
| • clockwise                                     | 45°                                                                   |
| • anticlockwise                                 | 45°                                                                   |

### Front ring

|                              |             |
|------------------------------|-------------|
| product component front ring | Yes         |
| design of the front ring     | standard    |
| material of the front ring   | Metal, matt |
| color of the front ring      | sand gray   |

### General technical data

|                                                    |                                  |
|----------------------------------------------------|----------------------------------|
| protection class IP                                | IP66, IP67, IP69(IP69K)          |
| degree of protection NEMA rating                   | 1, 2, 3, 3R, 4, 4X, 12, 13       |
| shock resistance                                   |                                  |
| • according to IEC 60068-2-27                      | sinusoidal half-wave 15g / 11 ms |
| • for railway applications according to EN 61373   | Category 1, Class B              |
| vibration resistance                               |                                  |
| • according to IEC 60068-2-6                       | 10 ... 500 Hz: 5g                |
| • for railway applications according to EN 61373   | Category 1, Class B              |
| operating frequency maximum                        | 1 800 1/h                        |
| mechanical service life (operating cycles) typical | 1 000 000                        |
| reference code according to IEC 81346-2            | S                                |
| Substance Prohibitance (Date)                      | 10/01/2014                       |

### Safety related data

|                                                       |         |
|-------------------------------------------------------|---------|
| B10 value with high demand rate according to SN 31920 | 300 000 |
|-------------------------------------------------------|---------|

**proportion of dangerous failures**

- with low demand rate according to SN 31920
- with high demand rate according to SN 31920

20 %  
20 %  
100 FIT

failure rate [FIT] with low demand rate according to SN 31920

**Ambient conditions****ambient temperature**

- during operation
- during storage

-25 ... +70 °C  
-40 ... +80 °C

environmental category during operation according to IEC 60721

3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 ... 95%)

**Installation/ mounting/ dimensions****height**

32.3 mm

**width**

32.3 mm

**shape of the installation opening**

round

**mounting diameter**

22.3 mm

**positive tolerance of installation diameter**

0.4 mm

**mounting height**

28.8 mm

**installation width**

32.3 mm

**installation depth**

25.4 mm

**Certificates/ approvals****General Product Approval****Declaration of Conformity**

[Confirmation](#)

**Test Certificates****Marine / Shipping**

[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)

**Marine / Shipping****other**

[Confirmation](#)

**Further information****Information on the packaging**

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<https://www.siemens.com/ic10>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1032-2BM50-0AA0>

**Cax online generator**



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1032-2BM50-0AA0>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3SU1032-2BM50-0AA0>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3SU1032-2BM50-0AA0&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1032-2BM50-0AA0&lang=en)

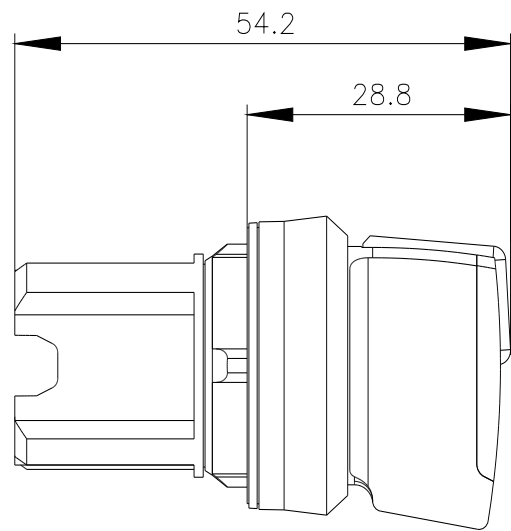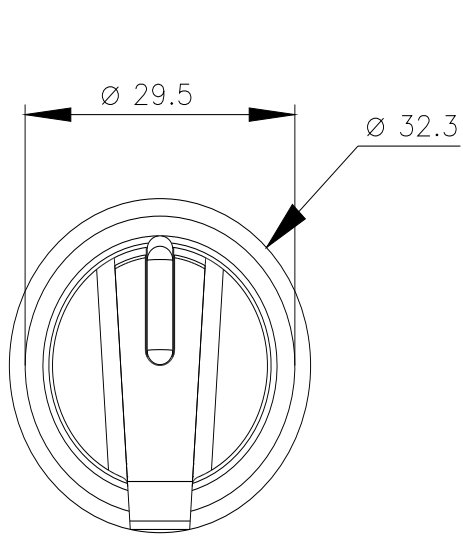

last modified:

1/26/2022 