



Mushroom pushbutton, 22 mm, round, metal, shiny, red, 40 mm, latching, pull-to-unlatch mechanism, with holder, 1 NC, screw terminal

product brand name	SIRIUS ACT
product designation	Mushroom pushbuttons
design of the product	Complete unit
product type designation	3SU1
product line	Metal, shiny, 22 mm
manufacturer's article number	
• of supplied contact module at position 1	3SU1400-1AA10-1CA0
• of the supplied holder	3SU1550-0AA10-0AA0
• of the supplied actuator	3SU1050-1BA20-0AA0

Enclosure

number of command points	1
---------------------------------	---

Actuator

principle of operation of the actuating element	latching
product extension optional light source	No
color of the actuating element	red
material of the actuating element	plastic
shape of the actuating element	round
outer diameter of the actuating element	40 mm
number of contact modules	1
type of unlocking device	pull-to-unlatch mechanism
number of switching positions	2

Front ring

product component front ring	Yes
design of the front ring	Standard
material of the front ring	Metal, high gloss
color of the front ring	silver

Holder

material of the holder	Plastic
-------------------------------	---------

Display

number of LEDs	0
-----------------------	---

General technical data

product function	
• positive opening	Yes
• EMERGENCY OFF function	No
• EMERGENCY STOP function	No
product component light source	No
insulation voltage rated value	500 V
degree of pollution	3
type of voltage of the operating voltage	AC/DC
surge voltage resistance rated value	6 kV
protection class IP	IP66, IP67, IP69(IP69K)

• of the terminal	IP20		
degree of protection NEMA rating	1, 2, 3, 3R, 4, 4X, 12, 13		
shock resistance			
• according to IEC 60068-2-27	sinusoidal half-wave 15g / 11 ms		
vibration resistance			
• according to IEC 60068-2-6	10 ... 500 Hz: 5g		
operating frequency maximum	1 800 1/h		
mechanical service life (switching cycles) typical	500 000		
electrical endurance (switching cycles) typical	10 000 000		
thermal current	10 A		
reference code according to IEC 81346-2	P		
continuous current of the C characteristic MCB	10 A; for a short-circuit current smaller than 400 A		
continuous current of the quick DIAZED fuse link	10 A		
continuous current of the DIAZED fuse link gG	10 A		
Substance Prohibitance (Date)	10/01/2014		
operating voltage			
• at AC — at 50 Hz rated value — at 60 Hz rated value • at DC rated value	5 ... 500 V 5 ... 500 V 5 ... 500 V		
Power Electronics			
contact reliability	One maloperation per 100 million (17 V, 5 mA), one maloperation per 10 million (5 V, 1 mA)		
Auxiliary circuit			
design of the contact of auxiliary contacts	Silver alloy		
number of NC contacts for auxiliary contacts	1		
number of NO contacts for auxiliary contacts	0		
Connections/ Terminals			
type of electrical connection of modules and accessories	Screw-type terminal		
type of connectable conductor cross-sections			
• solid with core end processing • solid without core end processing • finely stranded with core end processing • finely stranded without core end processing • at AWG cables	2x (0.5 ... 0.75 mm ²) 2x (1.0 ... 1.5 mm ²) 2x (0.5 ... 1.5 mm ²) 2x (1,0 ... 1,5 mm ²) 2x (18 ... 14)		
tightening torque of the screws in the bracket	1 ... 1.2 N·m		
tightening torque with screw-type terminals	0.8 ... 0.9 N·m		
Ambient conditions			
ambient temperature			
• during operation • during storage	-25 ... +70 °C -40 ... +80 °C		
environmental category during operation according to IEC 60721	3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 ... 95%, no condensation in operation permitted for all devices behind front panel)		
Installation/ mounting/ dimensions			
fastening method			
• of modules and accessories	Front plate mounting		
height	40 mm		
width	40 mm		
shape of the installation opening	round		
mounting diameter	22.3 mm		
positive tolerance of installation diameter	0.4 mm		
mounting height	27.5 mm		
installation width	40 mm		
installation depth	49.7 mm		
Certificates/ approvals			
<table> <tr> <td>General Product Approval</td><td>Declaration of Conformity</td></tr> </table>		General Product Approval	Declaration of Conformity
General Product Approval	Declaration of Conformity		



[Confirmation](#)



Declaration of Conformity	Test Certificates	Marine / Shipping
---------------------------	-------------------	-------------------



[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)



Marine / Shipping	other
-------------------	-------



[Confirmation](#)

[Environmental Confirmations](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1150-1BA20-1CA0>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1150-1BA20-1CA0>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SU1150-1BA20-1CA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1150-1BA20-1CA0&lang=en

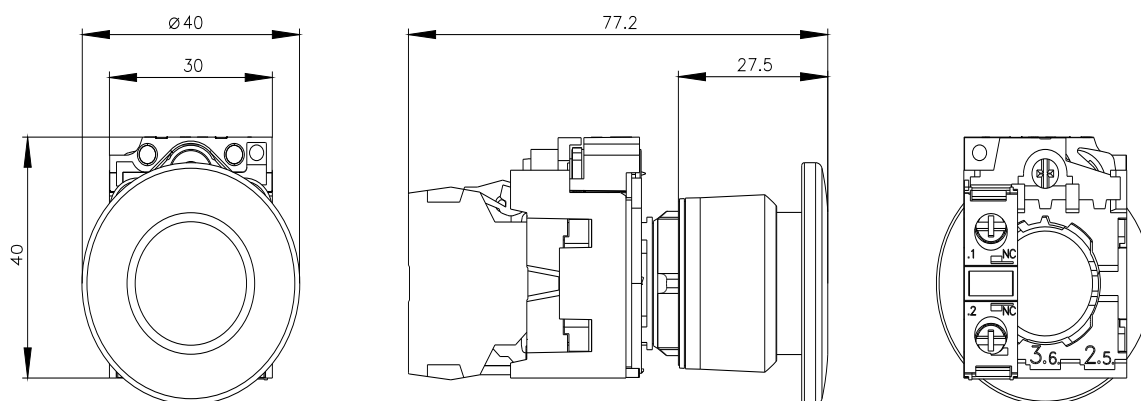

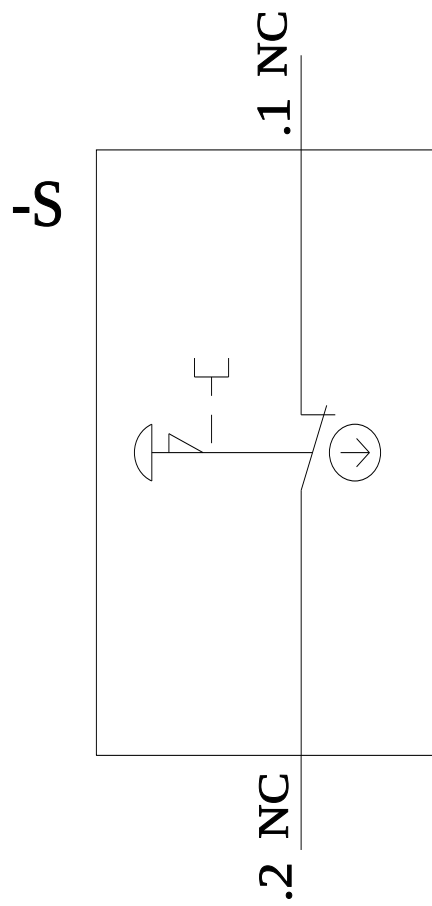

last modified:

1/27/2022