



AS-Interface enclosure for command devices, 22 mm, round, Enclosure material plastic, Enclosure top part yellow, 1 control point plastic, Recess for label, A=EMERGENCY STOP mushroom pushbutton red, 40 mm, rotate-to-unlatch, 1 NC, 1 NC, spring-type terminal, floor mounting, Insulation displacement system on top, Label enclosed

**product brand name**  
**product designation**  
**product type designation**  
**equipment of commanding and signaling device**

**manufacturer's article number**

- of supplied contact module
- of supplied contact module at the command point A 1
- of supplied contact module at the command point A 2
- of supplied communication module
- of the supplied holder
- of the supplied holder at the command point A
- of the supplied actuator
- of the supplied actuator at the command point A
- of supplied empty enclosure

SIRIUS ACT

Enclosures

3SU1

A = EMERGENCY STOP mushroom pushbutton, 40 mm, with positive latching acc. to ISO 13850 and rotate-to-unlatch mechanism

A1 = 3SU1400-2AA10-3CA0, A2 = 3SU1400-2AA10-3CA0

[3SU1400-2AA10-3CA0](#)

[3SU1400-2AA10-3CA0](#)

AB = 3SU1400-2EA10-6AA0

A = 3SU1500-0AA10-0AA0

[3SU1500-0AA10-0AA0](#)

A = 3SU1000-1HB20-0AA0

[3SU1000-1HB20-0AA0](#)

[3SU1801-0AA00-0AB2](#)

### Enclosure

**design of the housing**

**shape of the enclosure front**

**material of the enclosure**

**number of command points**

**product component**

- EMERGENCY STOP device
- protective collar

color of the enclosure top part

**delivery state**

- as a kit
- pre-wired on strip terminal

**fastening method of the enclosure**

with recess for label

Square

plastic

1

Yes

No

yellow

No

No

Vertical

### Actuator

**design of the actuating element**

suitability for use EMERGENCY OFF switch

product feature lockout

product extension optional light source

color of the actuating element

**material of the actuating element**

**shape of the actuating element**

**number of contact modules**

**type of unlocking device**

EMERGENCY STOP mushroom pushbutton

Yes

No

No

red

plastic

round

2

A = rotate-to-unlatch mechanism

### Front ring

**product component front ring**

No

design of the front ring	Standard
material of the front ring	plastic
color of the front ring	black
<b>Holder</b>	
material of the holder	Plastic
<b>Display</b>	
number of LED modules	0
<b>General technical data</b>	
product function	Yes
• positive opening	Yes
• EMERGENCY OFF function	Yes
• EMERGENCY STOP function	Yes
protection class IP	IP66, IP67, IP69(IP69K)
degree of protection NEMA rating	1, 2, 3, 3R, 4, 4X, 12K, 13
shock resistance	
• according to IEC 60068-2-27	sinusoidal half-wave 15g / 11 ms
• for railway applications according to EN 61373	Category 1, Class B
vibration resistance	
• according to IEC 60068-2-6	10 ... 500 Hz: 5g
• for railway applications according to EN 61373	Category 1, Class B
reference code according to IEC 81346-2	S
continuous current of the C characteristic MCB	10 A; for a short-circuit current smaller than 400 A
continuous current of the quick DIAZED fuse link	10 A
continuous current of the DIAZED fuse link gG	10 A
Substance Prohibitance (Date)	10/01/2014
operating voltage	
• at AC	
— at 50 Hz rated value	5 ... 500 V
— at 60 Hz rated value	5 ... 500 V
• at DC rated value	5 ... 500 V
cable entry type	Adapter ASI shaped cable (insulation displacement method) M20 cable entry
<b>Communication/ Protocol</b>	
design of the interface for communication	AS-i
<b>Auxiliary circuit</b>	
design of the contact of auxiliary contacts	Silver alloy
number of NC contacts for auxiliary contacts	2
number of NO contacts for auxiliary contacts	0
<b>Connections/ Terminals</b>	
type of electrical connection of modules and accessories	Spring-type terminal
type of electrical connection on enclosure	Adapter ASI shaped cable (insulation displacement method)
tightening torque of the screws in the bracket	1 ... 1.2 N·m
tightening torque of fixing screws in the enclosure cover	1.5 ... 1.7 N·m
<b>Ambient conditions</b>	
ambient temperature	
• during operation	-25 ... +70 °C
• during storage	-40 ... +80 °C
environmental category during operation according to IEC 60721	3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 ... 95%, no condensation in operation permitted for all devices behind front panel)
<b>Installation/ mounting/ dimensions</b>	
fastening method of modules and accessories	Floor mounting
height	105.4 mm
width	85 mm
depth	109 mm
shape of the installation opening	round
<b>Accessories</b>	
number of labels	0
number of inscription plates	0
number of backing plates	0
<b>Certificates/ approvals</b>	


[Confirmation](#)
Declaration of  
Conformity

Test Certificates

other



EG-Konf.

[Type Test Certificates/Test Report](#)
[Special Test Certificate](#)
[Confirmation](#)
[Environmental Conformations](#)

## Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1801-0NB10-4HB2>

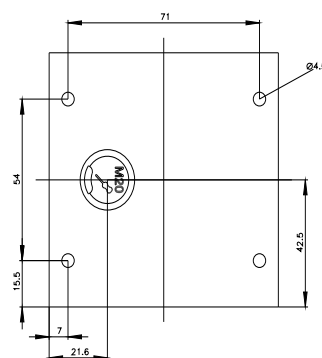
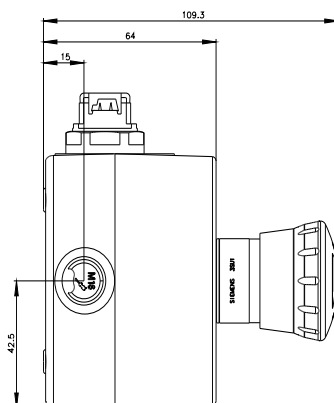
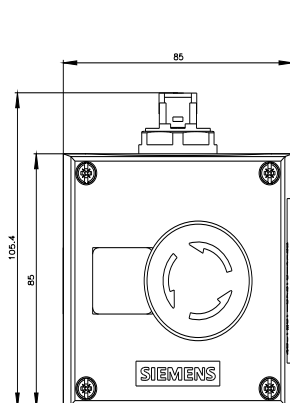
Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1801-0NB10-4HB2>

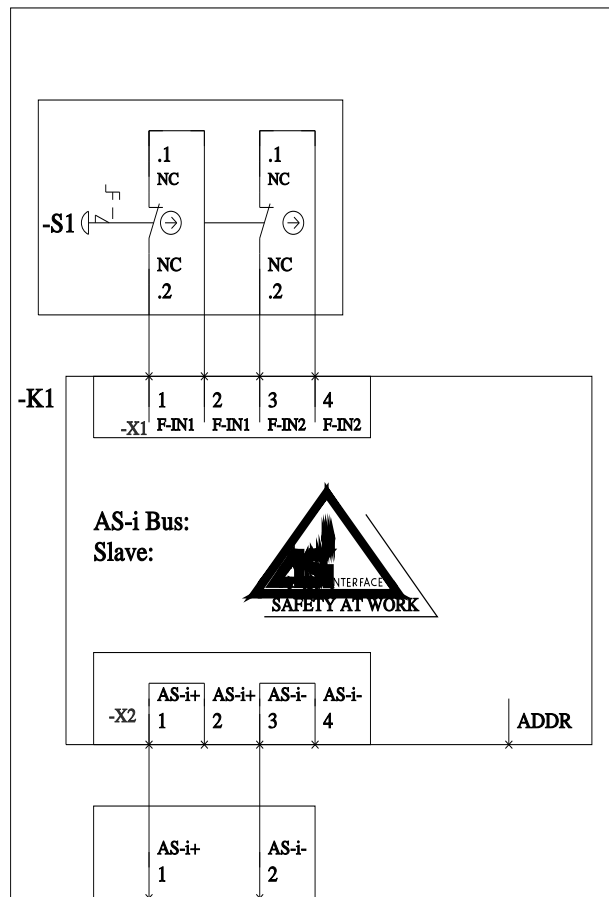
Service&amp;Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SU1801-0NB10-4HB2>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3SU1801-0NB10-4HB2&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1801-0NB10-4HB2&lang=en)


-U1



last modified:

1/26/2022 