



Enclosure for command devices, 22 mm, round, Enclosure material plastic, enclosure top part gray, 3 control points plastic, C=Indicator light clear, label, LED 24 V, screw terminal, B=Pushbutton white, label: I, 1 NO, screw terminal, A=Pushbutton black, Label: O, 1 NC, screw terminal, floor mounting, 1xM20 each on top and bottom, Labels enclosed

- product brand name**
product designation
product type designation
equipment of commanding and signaling device
manufacturer's article number
- of supplied contact module
 - of supplied contact module at the command point A 1
 - of supplied contact module at the command point B 2
 - of supplied LED module
 - of supplied LED module at the command point C
 - of the supplied holder
 - of the supplied holder at the command point A
 - of the supplied holder at the command point B
 - of the supplied holder at the command point C
 - of the supplied actuator
 - of the supplied actuator at the command point A
 - of the supplied actuator at the command point B
 - of the supplied actuator at the command point C
 - of supplied repeater
 - of supplied empty enclosure
 - of supplied accessory
 - of the supplied accessories at the command point A
 - of the supplied accessories at the command point B
 - of the supplied accessories at the command point C

SIRIUS ACT
Enclosures
3SU1
A = Pushbutton / B = Pushbutton / C = Indicator light

A1 = 3SU1400-2AA10-1CA0 / B2 = 3SU1400-2AA10-1BA0
[3SU1400-2AA10-1CA0](#)
[3SU1400-2AA10-1BA0](#)

C3 = 3SU1401-2BB60-1AA0
[3SU1401-2BB60-1AA0](#)

A = 3SU1500-0AA10-0AA0, B = 3SU1500-0AA10-0AA0, C = 3SU1500-0AA10-0AA0
[3SU1500-0AA10-0AA0](#)
[3SU1500-0AA10-0AA0](#)
[3SU1500-0AA10-0AA0](#)

A = 3SU1000-0AB10-0AA0 / B = 3SU1000-0AB60-0AA0
[3SU1000-0AB10-0AA0](#)
[3SU1000-0AB60-0AA0](#)
[3SU1001-6AA60-0AA0](#)

C = 3SU1001-6AA60-0AA0
[3SU1803-0AA00-0AB1](#)

A = 3SU1900-0AF16-0QA0, B = 3SU1900-0AF16-0QB0, C = 3SU1900-0AF16-0AA0
[3SU1900-0AF16-0QA0](#)
[3SU1900-0AF16-0QB0](#)
[3SU1900-0AF16-0AA0](#)

Enclosure

design of the housing	with recess for label
shape of the enclosure front	rectangular
material of the enclosure	plastic
number of command points	3
product component	
• EMERGENCY STOP device	No
• protective collar	No
color of the enclosure top part	grey
delivery state	
• as a kit	No
• pre-wired on strip terminal	No
fastening method of the enclosure	Vertical

Actuator

design of the actuating element	Pushbutton / pushbutton / indicator light
suitability for use EMERGENCY OFF switch	No
product feature lockout	No
product extension optional light source	Yes
color of the actuating element	A = black / B = white / C = clear
material of the actuating element	plastic
shape of the actuating element	round
number of contact modules	2
type of unlocking device	A = none / B = none / C = none
Front ring	
product component front ring	Yes
design of the front ring	Standard
material of the front ring	plastic
color of the front ring	black
Holder	
material of the holder	Plastic
Display	
number of LED modules	1
General technical data	
product function	Yes
• positive opening	No
• EMERGENCY OFF function	No
• EMERGENCY STOP function	IP66, IP67, IP69(IP69K)
protection class IP	1, 2, 3, 3R, 4, 4X, 12K, 13
degree of protection NEMA rating	
shock resistance	sinusoidal half-wave 15g / 11 ms
• according to IEC 60068-2-27	Category 1, Class B
• for railway applications according to EN 61373	
vibration resistance	10 ... 500 Hz: 5g
• according to IEC 60068-2-6	Category 1, Class B
• for railway applications according to EN 61373	S
reference code according to IEC 81346-2	10 A; for a short-circuit current smaller than 400 A
continuous current of the C characteristic MCB	10 A
continuous current of the quick DIAZED fuse link	10 A
continuous current of the DIAZED fuse link gG	10 A
Substance Prohibitance (Date)	10/01/2014
operating voltage	
• at AC	
— at 50 Hz rated value	24 ... 24 V
— at 60 Hz rated value	24 ... 24 V
• at DC rated value	24 ... 24 V
Communication/ Protocol	
design of the interface for communication	without
Auxiliary circuit	
design of the contact of auxiliary contacts	Silver alloy
number of NC contacts for auxiliary contacts	1
number of NO contacts for auxiliary contacts	1
Connections/ Terminals	
type of electrical connection of modules and accessories	Screw-type terminal
type of electrical connection on enclosure	Cable routing above and below, both 1 x M20
tightening torque of the screws in the bracket	1 ... 1.2 N·m
tightening torque of fixing screws in the enclosure cover	1.5 ... 1.7 N·m
tightening torque with screw-type terminals	0.8 ... 0.9 N·m
Lamp	
light intensity	900 ... 1 400 mcd
Ambient conditions	
ambient temperature	
• during operation	-25 ... +70 °C
• during storage	-40 ... +80 °C
environmental category during operation according to IEC 60721	3M6, 3S2, 3B2, 3K6 (with relative air humidity of 10 ... 95%, no condensation in operation permitted for all devices behind front panel)

Installation/ mounting/ dimensions	
fastening method of modules and accessories	Floor mounting
height	154 mm
width	85 mm
depth	75.8 mm
shape of the installation opening	round
Accessories	
number of labels	3
marking of the name plate for command devices	A = O / B = I / C = without inscription
color of the label	A = black / B = black / C = black
number of inscription plates	0
Certificates/ approvals	
General Product Approval	






[Confirmation](#)




Declaration of Conformity	Test Certificates	Marine / Shipping
 EG-Konf.	 Special Test Certificate	Type Test Certificates/Test Report  ABS  LRS

Marine / Shipping	other
 PRS  RINA  RMRS	Environmental Confirmations Confirmation

Further information
Information- and Downloadcenter (Catalogs, Brochures,...) https://www.siemens.com/ic10 Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1803-0AC00-2AB1 Cax online generator http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1803-0AC00-2AB1 Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3SU1803-0AC00-2AB1 Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1803-0AC00-2AB1&lang=en

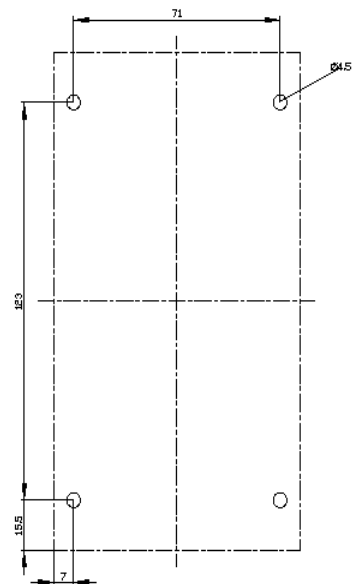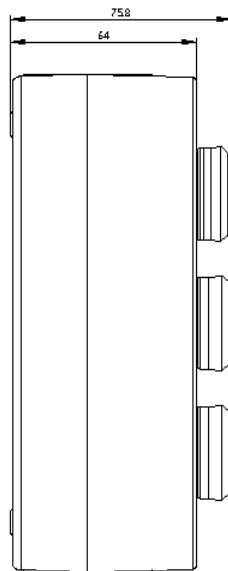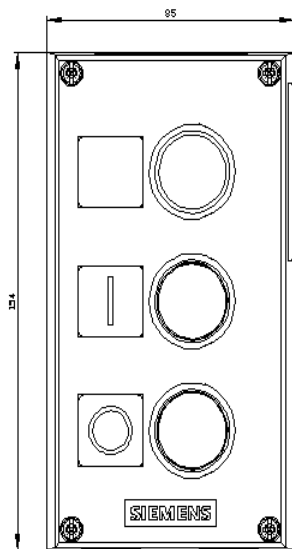

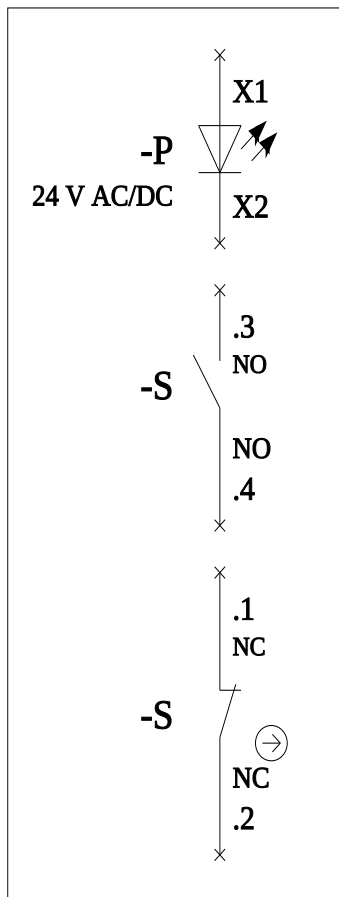

last modified:

1/26/2022 