



Enclosure for command devices, 22 mm, round, Enclosure material plastic, enclosure top part gray, 3 control points plastic, C=Pushbutton black, Label: II, 1 NO, screw terminal, B=Pushbutton black, Label: I, 1 NO, screw terminal, A=Pushbutton red, label: O, 1 NC, screw terminal, floor mounting, 1xM20 each on top and bottom, Labels enclosed

| | |
|---|---|
| product brand name | SIRIUS ACT |
| product designation | Enclosures |
| product type designation | 3SU1 |
| equipment of commanding and signaling device | A = Pushbutton / B = Pushbutton / C = Pushbutton |
| manufacturer's article number | |
| • of supplied contact module | A1 = 3SU1400-2AA10-1CA0 / B2 = 3SU1400-2AA10-1BA0 / C2 = 3SU1400-2AA10-1CA0 |
| • of supplied contact module at the command point A 1 | 3SU1400-2AA10-1CA0 |
| • of supplied contact module at the command point B 2 | 3SU1400-2AA10-1BA0 |
| • of supplied contact module at the command point C 2 | 3SU1400-2AA10-1BA0 |
| • of the supplied holder | A = 3SU1500-0AA10-0AA0, B = 3SU1500-0AA10-0AA0, C = 3SU1500-0AA10-0AA0 |
| • of the supplied holder at the command point A | 3SU1500-0AA10-0AA0 |
| • of the supplied holder at the command point B | 3SU1500-0AA10-0AA0 |
| • of the supplied holder at the command point C | 3SU1500-0AA10-0AA0 |
| • of the supplied actuator | A = 3SU1000-0AB20-0AA0 / B = 3SU1000-0AB10-0AA0 / C = 3SU1000-0AB10-0AA0 |
| • of the supplied actuator at the command point A | 3SU1000-0AB20-0AA0 |
| • of the supplied actuator at the command point B | 3SU1000-0AB10-0AA0 |
| • of the supplied actuator at the command point C | 3SU1000-0AB10-0AA0 |
| • of supplied empty enclosure | 3SU1803-0AA00-0AB1 |
| • of supplied accessory | A = 3SU1900-0AF16-0QA0, B = 3SU1900-0AF16-0QB0, C = 3SU1900-0AF16-0QC0 |
| • of the supplied accessories at the command point A | 3SU1900-0AF16-0QA0 |
| • of the supplied accessories at the command point B | 3SU1900-0AF16-0QB0 |
| • of the supplied accessories at the command point C | 3SU1900-0AF16-0QC0 |

Enclosure

| | |
|--|-----------------------|
| design of the housing | with recess for label |
| shape of the enclosure front | rectangular |
| material of the enclosure | plastic |
| number of command points | 3 |
| product component | |
| • EMERGENCY STOP device | No |
| • protective collar | No |
| color of the enclosure top part | grey |
| delivery state | No |
| • as a kit | No |
| • pre-wired on strip terminal | Vertical |
| fastening method of the enclosure | |

Actuator

| | |
|--|---|
| design of the actuating element | Pushbutton / pushbutton / pushbutton |
| suitability for use EMERGENCY OFF switch | No |
| product feature lockout | No |
| product extension optional light source | No |
| color of the actuating element | A = red / B = black / C = black |
| material of the actuating element | plastic |
| shape of the actuating element | round |
| number of contact modules | 3 |
| type of unlocking device | A = none / B = none / C = none |
| Front ring | |
| product component front ring | Yes |
| design of the front ring | Standard |
| material of the front ring | plastic |
| color of the front ring | black |
| Holder | |
| material of the holder | Plastic |
| Display | |
| number of LED modules | 0 |
| General technical data | |
| product function | Yes |
| • positive opening | No |
| • EMERGENCY OFF function | No |
| • EMERGENCY STOP function | |
| protection class IP | IP66, IP67, IP69(IP69K) |
| degree of protection NEMA rating | 1, 2, 3, 3R, 4, 4X, 12K, 13 |
| shock resistance | sinusoidal half-wave 15g / 11 ms Category 1, Class B |
| vibration resistance | 10 ... 500 Hz: 5g Category 1, Class B |
| reference code according to IEC 81346-2 | S |
| continuous current of the C characteristic MCB | 10 A; for a short-circuit current smaller than 400 A |
| continuous current of the quick DIAZED fuse link | 10 A |
| continuous current of the DIAZED fuse link gG | 10 A |
| Substance Prohibitance (Date) | 10/01/2014 |
| operating voltage | |
| • at AC | 5 ... 500 V |
| — at 50 Hz rated value | 5 ... 500 V |
| — at 60 Hz rated value | 5 ... 500 V |
| • at DC rated value | 5 ... 500 V |
| Communication/ Protocol | |
| design of the interface for communication | without |
| Auxiliary circuit | |
| design of the contact of auxiliary contacts | Silver alloy |
| number of NC contacts for auxiliary contacts | 1 |
| number of NO contacts for auxiliary contacts | 2 |
| Connections/ Terminals | |
| type of electrical connection of modules and accessories | Screw-type terminal |
| type of electrical connection on enclosure | Cable routing above and below, both 1 x M20 |
| tightening torque of the screws in the bracket | 1 ... 1.2 N·m |
| tightening torque of fixing screws in the enclosure cover | 1.5 ... 1.7 N·m |
| tightening torque with screw-type terminals | 0.8 ... 0.9 N·m |
| Ambient conditions | |
| ambient temperature | -25 ... +70 °C |
| • during operation | -40 ... +80 °C |
| • during storage | |
| environmental category during operation according to IEC 60721 | 3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 ... 95%, no condensation in operation permitted for all devices behind front panel) |
| Installation/ mounting/ dimensions | |
| fastening method of modules and accessories | Floor mounting |

| | |
|-----------------------------------|--------|
| height | 154 mm |
| width | 85 mm |
| depth | 75 mm |
| shape of the installation opening | round |

Accessories

| | |
|---|-----------------------------------|
| number of labels | 3 |
| marking of the name plate for command devices | A = O / B = I / C = II |
| color of the label | A = black / B = black / C = black |
| number of inscription plates | 0 |

Certificates/ approvals

General Product Approval



[Confirmation](#)



Declaration of Conformity



Test Certificates

[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)

Marine / Shipping



Marine / Shipping

other



[Confirmation](#)

[Environmental Confirmations](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1803-0AD00-2AB1>

Cax online generator




<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1803-0AD00-2AB1>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SU1803-0AD00-2AB1>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1803-0AD00-2AB1&lang=en

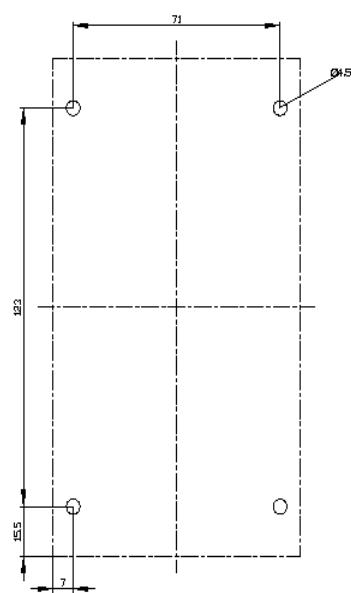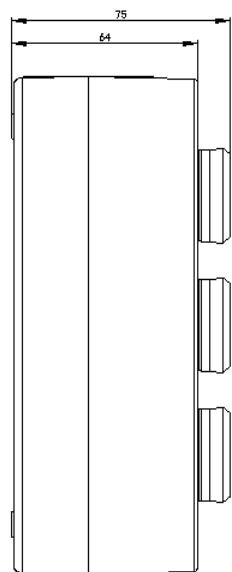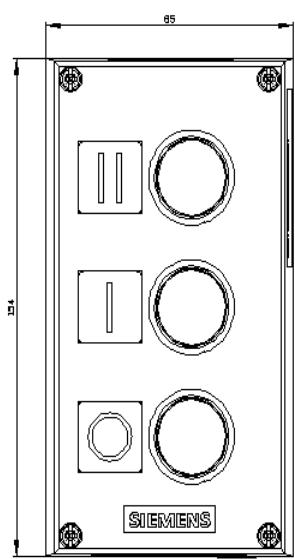

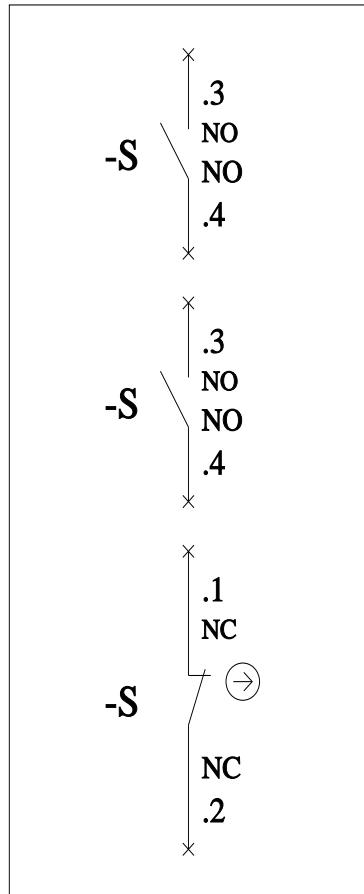

last modified:

1/26/2022