


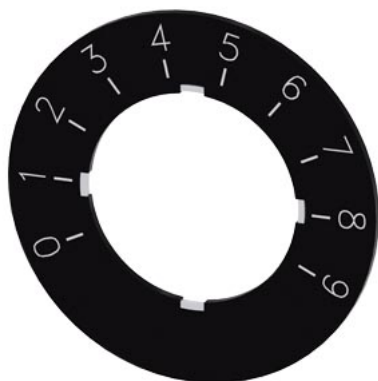

Labeling plate for potentiometer, black label, white font, with inscription:
0...9 Outer diameter 40 mm

product brand name
product designation
design of the product
product type designation

SIRIUS ACT
Labeling plate
for potentiometers
3SU1

General technical data

protection class IP

IP66, IP67, IP69(IP69K)

shock resistance for railway applications according to EN 61373

Category 1, Class B

vibration resistance for railway applications according to EN 61373

Category 1, Class B

Substance Prohibition (Date)

10/01/2014

Ambient conditions

ambient temperature

- during operation
- during storage and transport

70 ... -25 °C
80 ... -40 °C

Accessories

material of accessory

Plastic

fastening method of label

without

marking of the name plate for command devices

SYMBOL: 0 ... 9 (for potentiometer)

shape of the name plate for command devices

round

color of the label

black (plate); white (text)

printed ISO symbols

SYMBOL: 0 ... 9 (for potentiometer)

Certificates/ approvals

General Product Approval

Declaration of Conformity



[Confirmation](#)




Test Certificates

Marine / Shipping

[Type Test Certificates/Test Report](#)



other

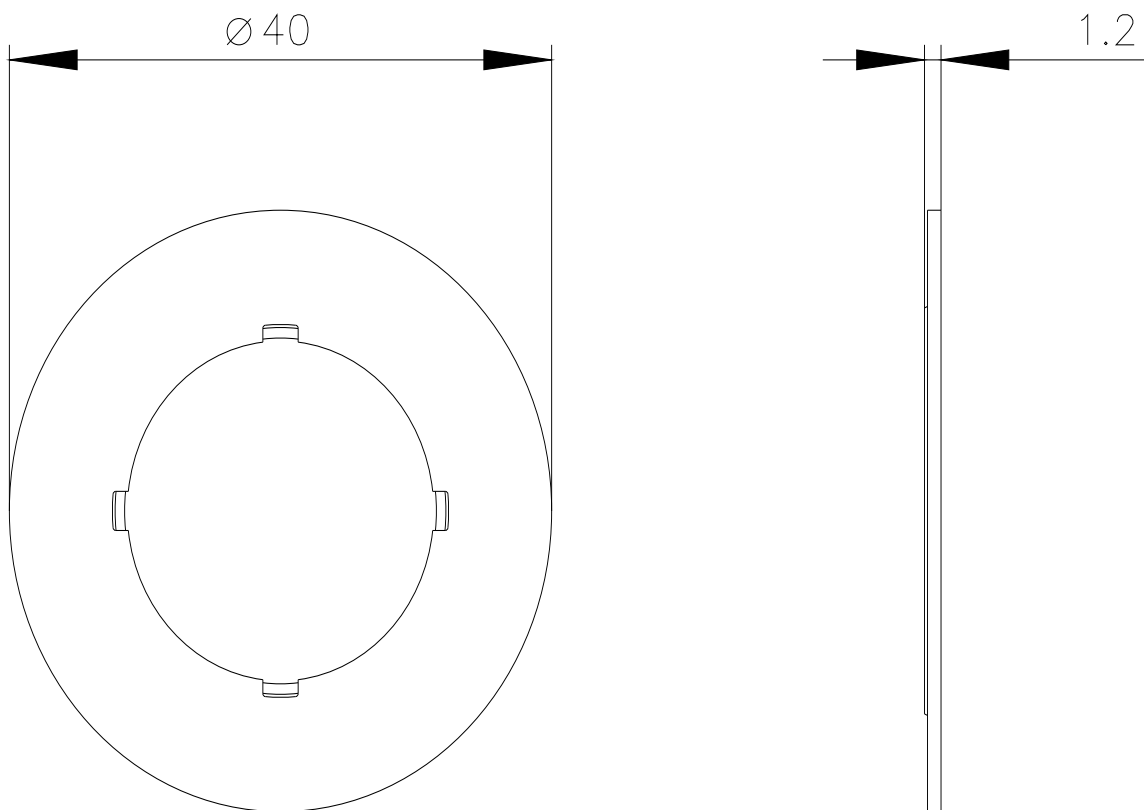Further information**Information- and Downloadcenter (Catalogs, Brochures,...)**<https://www.siemens.com/ic10>**Industry Mall (Online ordering system)**<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1900-0BG16-0RT0>**Cax online generator**<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1900-0BG16-0RT0>**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**<https://support.industry.siemens.com/cs/ww/en/ps/3SU1900-0BG16-0RT0>**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1900-0BG16-0RT0&lang=en

last modified:

3/29/2022