



Coupling M8 with connection cable, 5 m long for M8 connector 4-pole, for 3SE66 magnetically-operated switch

| General technical data                   |                                                |
|------------------------------------------|------------------------------------------------|
| product brand name                       | SIRIUS                                         |
| product designation                      | Coupling, M8 socket, for 3SE66                 |
| operational current at 40 °C rated value | 4 A                                            |
| operating voltage rated value            | 30 V                                           |
| number of poles                          | 4                                              |
| wire length of connection cable          | 5 m                                            |
| ambient temperature during operation     | -25 ... +85 °C                                 |
| type of electrical connection            | connector M8                                   |
| color coding of the core                 | Pin 1 = BN, Pin 2 = WH, Pin 3 = BU, Pin 4 = BK |
| overvoltage category                     | 2                                              |
| degree of pollution                      | 3                                              |
| protection class IP                      | IP67                                           |
| material                                 |                                                |
| • of the contact                         | CuSn                                           |
| • of contact coating                     | Au                                             |
| • of contact main body                   | PUR                                            |

| Certificates/ approvals  |                           |       |
|--------------------------|---------------------------|-------|
| General Product Approval | Declaration of Conformity | other |




[Confirmation](#)



[Confirmation](#)

Further information

Information on the packaging  
<https://support.industry.siemens.com/cs/ww/en/view/109813875>  
Information- and Downloadcenter (Catalogs, Brochures,...)  
<https://www.siemens.com/ic10>  
Industry Mall (Online ordering system)  
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SX5601-3GA05>  
Cax online generator  
<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SX5601-3GA05>  
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)  
<https://support.industry.siemens.com/cs/ww/en/ps/3SX5601-3GA05>  
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)  
[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3SX5601-3GA05&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SX5601-3GA05&lang=en)

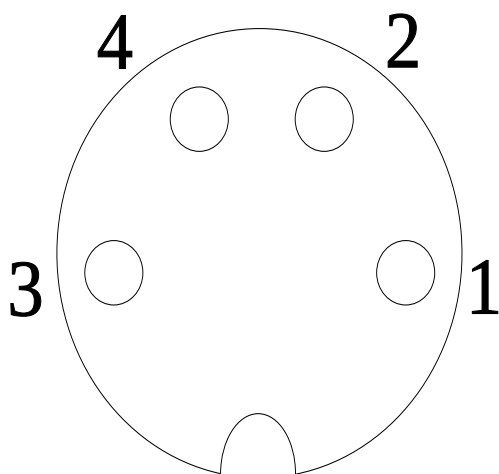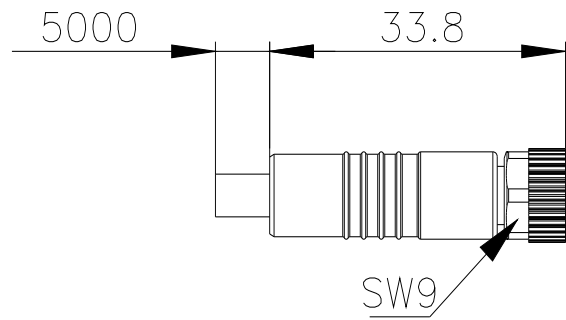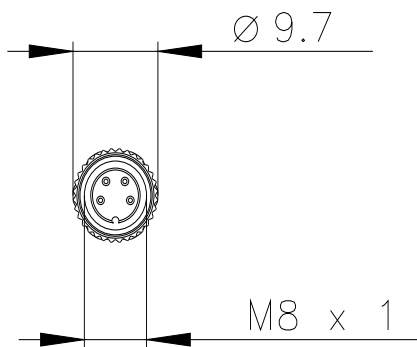

|   |            |
|---|------------|
| 1 | BN = Brown |
| 2 | WH = White |
| 3 | BU = Blue  |
| 4 | BK = Black |

