

Contactor, Size 14, 3-pole, AC-3, 335kW, 400/380 V (690 V) Auxiliary switch 33 (3 NO+3 NC) with reversing contactor 3TC4417-4A and series resistor DC economy circuit 24 V DC



product designation
product type designation

Vacuum contactor
3TF6

General technical data

size of contactor	14
product extension	
• function module for communication	No
• auxiliary switch	No
insulation voltage	
• of main circuit with degree of pollution 3 rated value	1 000 V
• of auxiliary circuit with degree of pollution 3 rated value	690 V
surge voltage resistance	
• of main circuit rated value	8 kV
• of auxiliary circuit rated value	6 kV
maximum permissible voltage for safe isolation in networks with grounded star point	
• between auxiliary and auxiliary circuit	300 V
• between main and auxiliary circuit	500 V
shock resistance at rectangular impulse	
• at DC	9.5g / 5 ms, 5.7g / 10 ms
shock resistance with sine pulse	
• at DC	14.5 g / 5 ms, 9.1 g / 10 ms
mechanical service life (operating cycles)	
• of contactor typical	5 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	03/01/2017

Ambient conditions

installation altitude at height above sea level maximum	2 000 m
ambient temperature	
• during operation	-25 ... +55 °C
• during storage	-55 ... +80 °C
relative humidity minimum	10 %
relative humidity during operation	10 ... 95 %
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %

Main circuit

number of poles for main current circuit	3
number of NO contacts for main contacts	3
number of NC contacts for main contacts	0
type of voltage for main current circuit	AC
operating voltage	
• at AC-3 rated value maximum	690 V

<ul style="list-style-type: none"> • at AC-3e rated value maximum 	690 V
operational current	
<ul style="list-style-type: none"> • at AC-1 <ul style="list-style-type: none"> — up to 690 V at ambient temperature 40 °C rated value — up to 690 V at ambient temperature 55 °C rated value • at AC-3 <ul style="list-style-type: none"> — at 400 V rated value — at 500 V rated value — at 690 V rated value • at AC-3e <ul style="list-style-type: none"> — at 400 V rated value — at 500 V rated value — at 690 V rated value • at AC-4 at 400 V rated value • at AC-6a <ul style="list-style-type: none"> — up to 500 V for current peak value n=20 rated value — up to 690 V for current peak value n=20 rated value • at AC-6a <ul style="list-style-type: none"> — up to 400 V for current peak value n=30 rated value — up to 500 V for current peak value n=30 rated value — up to 690 V for current peak value n=30 rated value 	700 A 630 A 630 A 630 A 630 A 630 A 630 A 610 A 513 A 513 A 342 A 342 A 342 A
connectable conductor cross-section in main circuit at AC-1	
<ul style="list-style-type: none"> • at 40 °C minimum permissible 	480 mm ²
operational current for approx. 200000 operating cycles at AC-4	
<ul style="list-style-type: none"> • at 400 V rated value • at 690 V rated value 	300 A 300 A
operating power	
<ul style="list-style-type: none"> • at AC-3 <ul style="list-style-type: none"> — at 230 V rated value — at 400 V rated value — at 690 V rated value • at AC-3e <ul style="list-style-type: none"> — at 230 V rated value — at 400 V rated value — at 690 V rated value 	200 kW 335 kW 600 kW 200 kW 335 kW 600 kW
operating apparent power at AC-6a	
<ul style="list-style-type: none"> • up to 400 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value 	338 kVA 586 kVA
operating apparent power at AC-6a	
<ul style="list-style-type: none"> • up to 400 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value 	226 kVA 390 kVA
thermal short-time current limited to 10 s	5 040 A
power loss [W] at AC-3 at 400 V for rated value of the operational current per conductor	45 W
power loss [W] at AC-3e at 400 V for rated value of the operational current per conductor	45 W
no-load switching frequency at AC	2 000 1/h
operating frequency	
<ul style="list-style-type: none"> • at AC-1 maximum • at AC-3e <ul style="list-style-type: none"> — at 400 V maximum — at 690 V maximum • at AC-2 at AC-3 maximum • at AC-2 at AC-3e maximum 	700 1/h 500 1/h 500 1/h 200 1/h 200 1/h

Control circuit/ Control

type of voltage of the control supply voltage	DC
control supply voltage at DC	

<ul style="list-style-type: none"> • rated value 	24 V
operating range factor control supply voltage rated value of magnet coil at DC	
<ul style="list-style-type: none"> • initial value 	0.8
<ul style="list-style-type: none"> • full-scale value 	1.1
closing power of magnet coil at DC	1 010 W
holding power of magnet coil at DC	28 W
closing delay	
<ul style="list-style-type: none"> • at DC 	76 ... 110 ms
opening delay	
<ul style="list-style-type: none"> • at DC 	10 ... 50 ms
arcing time	10 ... 15 ms
control version of the switch operating mechanism	Standard A1 - A2
Auxiliary circuit	
number of NC contacts for auxiliary contacts	
<ul style="list-style-type: none"> • attachable 	3
<ul style="list-style-type: none"> • instantaneous contact 	3
number of NO contacts for auxiliary contacts	
<ul style="list-style-type: none"> • attachable 	3
<ul style="list-style-type: none"> • instantaneous contact 	3
operational current at AC-12 maximum	10 A
operational current at AC-15	
<ul style="list-style-type: none"> • at 230 V rated value 	5.6 A
<ul style="list-style-type: none"> • at 400 V rated value 	3.6 A
<ul style="list-style-type: none"> • at 500 V rated value 	2.5 A
<ul style="list-style-type: none"> • at 690 V rated value 	2.3 A
operational current at DC-12 at 440 V rated value	0.33 A
operational current at DC-12	
<ul style="list-style-type: none"> • at 24 V rated value 	10 A
<ul style="list-style-type: none"> • at 48 V rated value 	10 A
<ul style="list-style-type: none"> • at 110 V rated value 	3.2 A
<ul style="list-style-type: none"> • at 125 V rated value 	2.5 A
<ul style="list-style-type: none"> • at 220 V rated value 	0.9 A
<ul style="list-style-type: none"> • at 600 V rated value 	0.22 A
operational current at DC-13	
<ul style="list-style-type: none"> • at 24 V rated value 	10 A
<ul style="list-style-type: none"> • at 48 V rated value 	5 A
<ul style="list-style-type: none"> • at 110 V rated value 	1.14 A
<ul style="list-style-type: none"> • at 125 V rated value 	0.98 A
<ul style="list-style-type: none"> • at 220 V rated value 	0.48 A
<ul style="list-style-type: none"> • at 600 V rated value 	0.07 A
contact reliability of auxiliary contacts	one incorrect switching operation of 100 million switching operations (17 V, 5 mA)
UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor	
<ul style="list-style-type: none"> • at 480 V rated value 	630 A
<ul style="list-style-type: none"> • at 600 V rated value 	630 A
yielded mechanical performance [hp]	
<ul style="list-style-type: none"> • for 3-phase AC motor <ul style="list-style-type: none"> — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value 	231 hp 266 hp 530 hp 664 hp
contact rating of auxiliary contacts according to UL	A600 / Q600
Short-circuit protection	
design of the fuse link	
<ul style="list-style-type: none"> • for short-circuit protection of the main circuit <ul style="list-style-type: none"> — with type of coordination 1 required — with type of assignment 2 required 	gG: 1000 A (690 V, 100 kA) gG: 500 A (690 V, 100 kA), aM: 630 A (690 V, 50 kA), BS88: 500 A (415 V, 50 kA)
<ul style="list-style-type: none"> • for short-circuit protection of the auxiliary switch required 	fuse gG: 10 A
Installation/ mounting/ dimensions	
mounting position	with vertical mounting surface +/-90° rotatable, with vertical mounting

fastening method <ul style="list-style-type: none"> side-by-side mounting 		surface +/- 22.5° tiltable to the front and back
height		screw fixing
width		Yes
depth		276 mm
required spacing		230 mm
<ul style="list-style-type: none"> with side-by-side mounting <ul style="list-style-type: none"> forwards upwards downwards at the side for grounded parts <ul style="list-style-type: none"> forwards upwards at the side downwards for live parts <ul style="list-style-type: none"> forwards upwards downwards at the side 		237 mm
		20 mm
		10 mm
		10 mm
		10 mm
		20 mm
		10 mm
		10 mm
		10 mm
		20 mm
		10 mm
		10 mm
		10 mm
Connections/ Terminals		
type of electrical connection		Connection bar
<ul style="list-style-type: none"> for main current circuit for auxiliary and control circuit at contactor for auxiliary contacts 		screw-type terminals
width of connection bar		Screw-type terminals
thickness of connection bar		30 mm
diameter of holes		6 mm
number of holes		11 mm
type of connectable conductor cross-sections		1
<ul style="list-style-type: none"> for main contacts <ul style="list-style-type: none"> stranded finely stranded with core end processing at AWG cables for main contacts 		70 ... 240 mm²
connectable conductor cross-section for main contacts		50 ... 240 mm²
<ul style="list-style-type: none"> finely stranded with core end processing 		2/0 ... 500 kcmil
connectable conductor cross-section for auxiliary contacts		240 ... 50 mm²
<ul style="list-style-type: none"> solid or stranded finely stranded with core end processing 		0.5 ... 2.5 mm²
type of connectable conductor cross-sections		0.5 ... 2.5 mm²
<ul style="list-style-type: none"> for auxiliary contacts <ul style="list-style-type: none"> solid finely stranded with core end processing at AWG cables for auxiliary contacts 		2x (0.5 ... 1.0 mm²), 2x (1.0 ... 2.5 mm²)
AWG number as coded connectable conductor cross section		2x (0.5 ... 1.0 mm²), 2x (0.75 ... 2.5 mm²)
<ul style="list-style-type: none"> for main contacts for auxiliary contacts 		2x (18 ... 12)
Safety related data		
product function		
<ul style="list-style-type: none"> mirror contact according to IEC 60947-4-1 positively driven operation according to IEC 60947-5-1 		Yes; One NC contact each must be connected in series for the right and left auxiliary switch block respectively
protection class IP on the front according to IEC 60529		No
		IP00
Certificates/ approvals		
General Product Approval		Functional Safety/Safety of Machinery
		Declaration of Conformity



[Type Examination Certificate](#)



Declaration of Conformity	Test Certificates	Marine / Shipping
---------------------------	-------------------	-------------------



EG-Konf.

[Type Test Certificates/Test Report](#)

[Miscellaneous](#)

[Special Test Certificate](#)



Marine / Shipping	other
-------------------	-------



[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3TF6833-1DB4>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3TF6833-1DB4>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3TF6833-1DB4>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3TF6833-1DB4&lang=en

Characteristic: Tripping characteristics, I_t, Let-through current


<https://support.industry.siemens.com/cs/ww/en/ps/3TF6833-1DB4/char>

Further characteristics (e.g. electrical endurance, switching frequency)


<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3TF6833-1DB4&objecttype=14&gridview=view1>

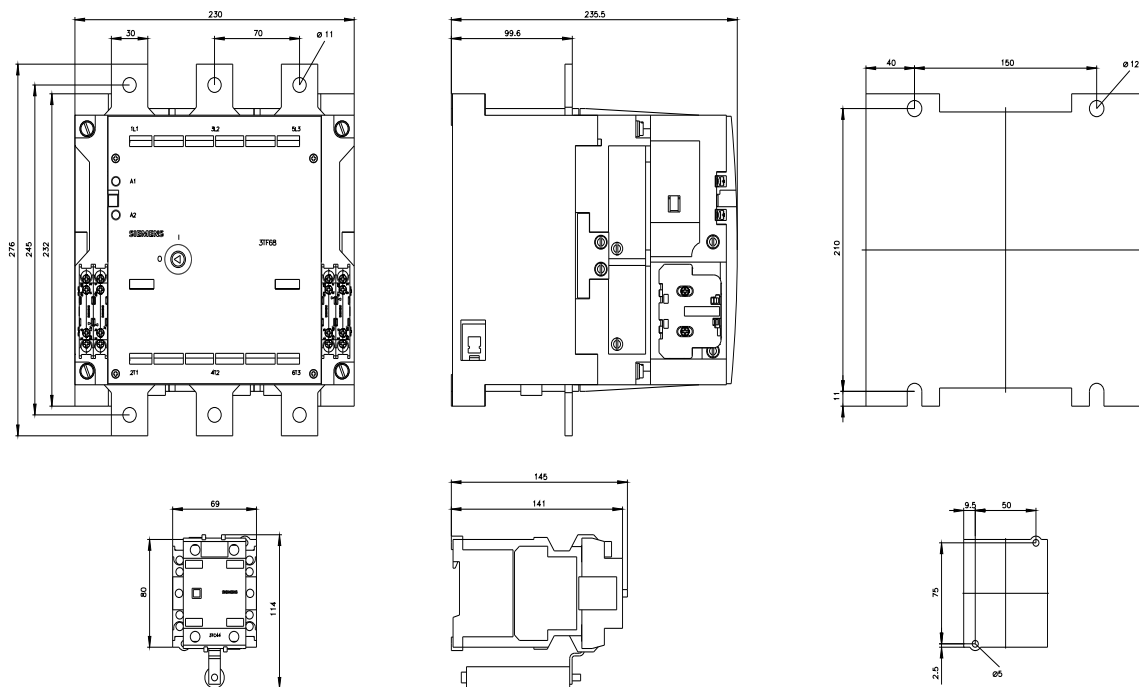

3TC4417-0Axx

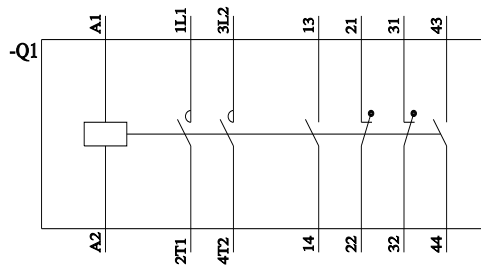

3TF(68,69)33-(1D,8D)xx

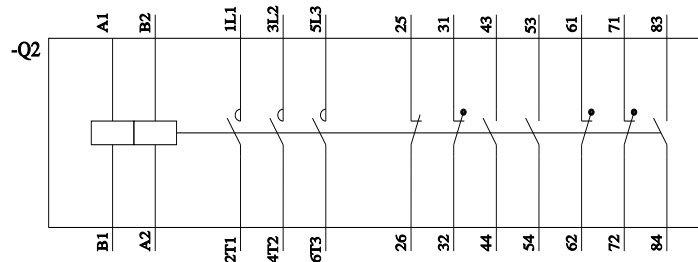

last modified:

8/2/2022

