








SIRIUS safety relay safety-oriented Standstill monitoring 230 V AC, 45 mm screw terminal EC instantaneous: 3 NO + 1 NC EC delayed: 0 SC: 3 Auto-start Basic unit max. error category EN 954-1: 4 Maximum achievable PL according to EN 13849-1: Maximum achievable SIL according to IEC 61508: 3

product brand name	SIRIUS
product designation	Standstill monitor
design of the product	for safe stoppage monitoring
General technical data	
protection class IP of the enclosure	IP20
protection class IP of the terminal	IP20
touch protection against electrical shock	finger-safe
insulation voltage rated value	690 V
ambient temperature	
• during storage	-40 ... +75 °C
• during operation	-25 ... +60 °C
air pressure according to SN 31205	90 ... 106 kPa
relative humidity during operation	10 ... 95 %
installation altitude at height above sea level maximum	2 000 m
vibration resistance according to IEC 60068-2-6	10 ... 55 Hz: 0.35 mm
shock resistance	8g / 10 ms
surge voltage resistance rated value	6 000 V
EMC emitted interference	IEC 61000-6-2, IEC 61000-6-3
installation environment regarding EMC	This product is suitable for Class A environments only. In household environments, this device can cause unwanted radio interference. The user is required to implement appropriate measures in this case.
reference code according to DIN 40719 extended	KT
according to IEC 204-2 according to IEC 750	
reference code according to EN 61346-2	F
number of sensor inputs	
• 1-channel or 2-channel	1
design of the cascading	none
type of the safety-related wiring of the inputs	measuring inputs
product feature cross-circuit-proof	No
Safety Integrity Level (SIL)	
• according to IEC 61508	3
• according to IEC 62061	3
• for delayed release circuit according to IEC 61508	SIL3
SIL Claim Limit (subsystem) according to EN 62061	3
performance level (PL)	
• according to ISO 13849-1	e
category according to EN ISO 13849-1	4
hardware fault tolerance according to IEC 61508	1
safety device type according to IEC 61508-2	Type B
PFHD with high demand rate according to EN 62061	1.5E-9 1/h
Average probability of failure on demand (PFDavg) with low demand rate acc. to IEC 61508	0.002 1/y

T1 value for proof test interval or service life according to IEC 61508	20 a
number of outputs as contact-affected switching element	
• as NC contact	
— for signaling function instantaneous contact	2
• as NO contact	
— safety-related instantaneous contact	4
— safety-related delayed switching	0
number of outputs as contact-less semiconductor switching element	
• safety-related	
— delayed switching	0
— instantaneous contact	0
• for signaling function	
— delayed switching	0
— instantaneous contact	2
stop category according to EN 60204-1	0
Inputs	
design of input	
• cascading input/functional switching	No
• feedback input	Yes
• start input	No
voltage measuring range at the measurement inputs at AC	
• according to UL maximum	600 V
• maximum	690 V
input resistance at the measurement inputs	500 kΩ
adjustable response value voltage for standstill detection	20 ... 400 mV
Outputs	
type of electrical connection plug-in socket	Yes
operating frequency maximum	1 200 1/h
switching capacity current	
• of semiconductor outputs	
— for signaling function at DC-13 at 24 V	0.1 A
• of the NO contacts of the relay outputs at DC-13	
— at 24 V	2 A
• of the NO contacts of the relay outputs at AC-15	
— at 115 V	3 A
— at 230 V	3 A
• of the NC contacts of the relay outputs at DC-13	
— at 24 V	2 A
• of the NC contacts of the relay outputs at AC-15	
— at 115 V	2 A
— at 230 V	2 A
thermal current of the switching element with contacts maximum	5 A
electrical endurance (operating cycles) typical	200 000
mechanical service life (operating cycles) typical	50 000 000
design of the fuse link for short-circuit protection of the NO contacts of the relay outputs required	quick: 5 A
Times	
adjustable downtime	0.2 ... 6 s
Control circuit/ Control	
type of voltage of the control supply voltage	AC
control supply voltage frequency	
• 1 rated value	50 Hz
• 2 rated value	60 Hz
control supply voltage 1 at AC	
• at 50 Hz rated value	230 V
• at 60 Hz rated value	230 V
operating range factor control supply voltage rated value of magnet coil	

<ul style="list-style-type: none">• at AC<ul style="list-style-type: none">— at 50 Hz— at 60 Hz	0.8 ... 1.1		
Installation/ mounting/ dimensions			
mounting position	any		
fastening method	screw and snap-on mounting		
width	45 mm		
height	138.5 mm		
depth	120 mm		
Connections/ Terminals			
type of electrical connection	screw-type terminals		
type of connectable conductor cross-sections			
<ul style="list-style-type: none">• solid	1x (0.5 ... 4.0 mm²), 2x (0.5 ... 2.5 mm²)		
<ul style="list-style-type: none">• finely stranded<ul style="list-style-type: none">— with core end processing	1x (0.5 ... 2.5 mm²), 2x (0.5 ... 1.5 mm²)		
type of connectable conductor cross-sections at AWG cables			
<ul style="list-style-type: none">• solid	2x (20 ... 14)		
<ul style="list-style-type: none">• stranded	2x (20 ... 14)		
Product Function			
product function			
<ul style="list-style-type: none">• light barrier monitoring	No		
<ul style="list-style-type: none">• standstill monitoring	Yes		
<ul style="list-style-type: none">• protective door monitoring	No		
<ul style="list-style-type: none">• automatic start	No		
<ul style="list-style-type: none">• magnetically operated switch monitoring NC-NO	No		
<ul style="list-style-type: none">• rotation speed monitoring	No		
<ul style="list-style-type: none">• laser scanner monitoring	No		
<ul style="list-style-type: none">• monitored start-up	No		
<ul style="list-style-type: none">• light array monitoring	No		
<ul style="list-style-type: none">• magnetically operated switch monitoring NC-NC	No		
<ul style="list-style-type: none">• EMERGENCY OFF function	No		
<ul style="list-style-type: none">• pressure-sensitive mat monitoring	No		
suitability for interaction press control	No		
suitability for use			
<ul style="list-style-type: none">• safety switch	Yes		
<ul style="list-style-type: none">• position switch monitoring	No		
<ul style="list-style-type: none">• EMERGENCY-OFF circuit monitoring	No		
<ul style="list-style-type: none">• valve monitoring	No		
<ul style="list-style-type: none">• tactile sensor monitoring	No		
<ul style="list-style-type: none">• magnetically operated switch monitoring	No		
<ul style="list-style-type: none">• safety-related circuits	Yes		
Certificates/ approvals			
certificate of suitability	UL, CSA, EN 60204-1, EN ISO 12100, EN 954-1, IEC 61508		
<ul style="list-style-type: none">• TÜV (German technical inspectorate) certificate	Yes		
<ul style="list-style-type: none">• UL approval	Yes		
<ul style="list-style-type: none">• BG BIA approval	Yes		
General Product Approval		Functional Safety/Safety of Machinery	Declaration of Conformity
			
			
		Type Examination Certificate	
Declaration of Conformity	Test Certificates	other	Railway



Further information

Siemens has decided to exit the Russian market (see here).

<https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business>

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3TK2810-0GA01>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3TK2810-0GA01>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3TK2810-0GA01>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3TK2810-0GA01&lang=en

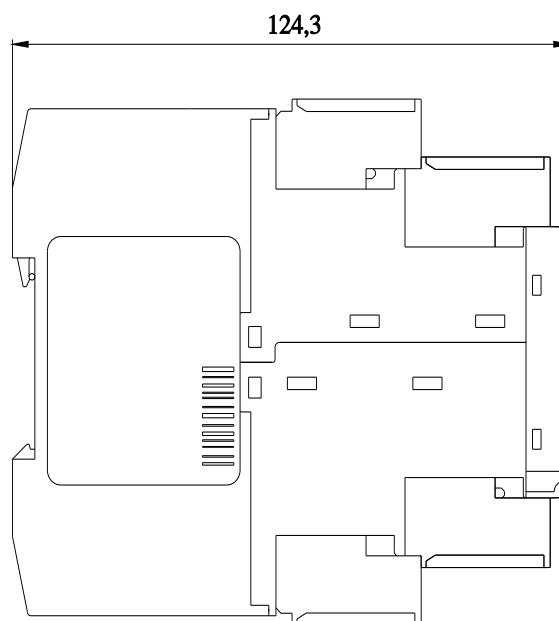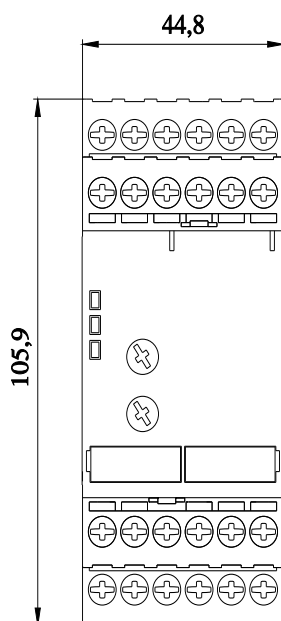

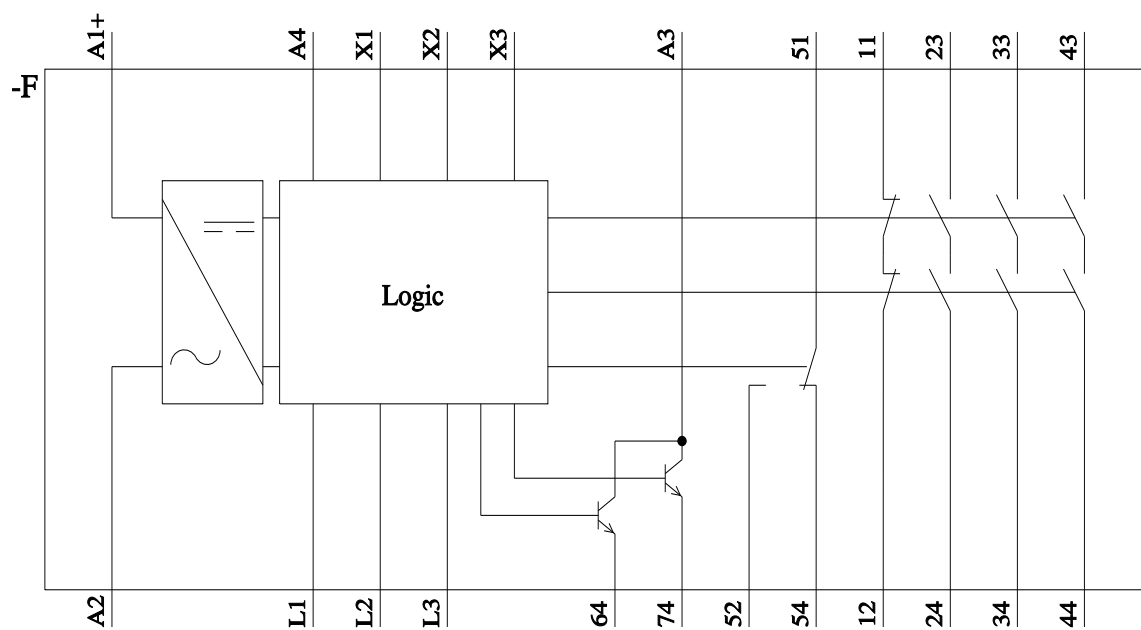

last modified:

4/1/2022 