



Figure similar

SIRIUS safety relay with relay enabling circuits (EC) 24 V DC, 45 mm overall width
Spring-type terminal EC instantaneous: 2 NO EC delayed: 2NO, 0.05...3 s SC:
1NC AUTOSTART Basic device Maximum achieved SIL: 3/2, PL: e/d

product brand name	SIRIUS
product designation	safety relays
design of the product	für Schutztüren
General technical data	
protection class IP of the enclosure	IP20
protection class IP of the terminal	IP20
touch protection against electrical shock	finger-safe
insulation voltage rated value	300 V
ambient temperature	
• during storage	-40 ... +80 °C
• during operation	-25 ... +60 °C
air pressure according to SN 31205	90 ... 106 kPa
relative humidity during operation	10 ... 95 %
installation altitude at height above sea level maximum	2 000 m
vibration resistance according to IEC 60068-2-6	5 ... 500 Hz: 0,075 mm
shock resistance	8g / 10 ms
surge voltage resistance rated value	4 000 V
EMC emitted interference	EN 60947-5-1
installation environment regarding EMC	This product is suitable for Class A environments only. In household environments, this device can cause unwanted radio interference. The user is required to implement appropriate measures in this case.
reference code according to DIN 40719 extended according to IEC 204-2 according to IEC 750	KT
reference code according to EN 61346-2	F
number of sensor inputs	
• 1-channel or 2-channel	1
design of the cascading	none
type of the safety-related wiring of the inputs	single-channel and two-channel
product feature cross-circuit-proof	Yes
Safety Integrity Level (SIL)	
• according to IEC 61508	3
• for delayed release circuit according to IEC 61508	SIL2
SIL Claim Limit (subsystem) according to EN 62061	3
performance level (PL)	
• for delayed release circuit according to EN ISO 13849-1	d
category according to EN ISO 13849-1	4
hardware fault tolerance according to IEC 61508	1
safety device type according to IEC 61508-2	Type A
PFHD with high demand rate according to EN 62061	2.7E-9 1/h
Average probability of failure on demand (PFDavg) with low	2.4E-6 1/y

demand rate acc. to IEC 61508	
T1 value for proof test interval or service life according to IEC 61508	20 a
number of outputs as contact-affected switching element	
• as NC contact	
— for signaling function instantaneous contact	1
• as NO contact	
— safety-related instantaneous contact	2
— safety-related delayed switching	2
number of outputs as contact-less semiconductor switching element	
• safety-related	
— delayed switching	0
— instantaneous contact	0
• for signaling function	
— delayed switching	0
— instantaneous contact	0
stop category according to EN 60204-1	0 + 1
Inputs	
design of input	
• cascading input/functional switching	No
• feedback input	Yes
• start input	Yes
Outputs	
type of electrical connection plug-in socket	Yes
operating frequency maximum	1 000 1/h
switching capacity current	
• of the NO contacts of the relay outputs for delayed release circuit	
— at AC-15 at 230 V	3 A
— at DC-13 at 24 V	2 A
• of the NO contacts of the relay outputs for instantaneous enabling circuit	
— at AC-15 at 230 V	5 A
— at DC-13 at 24 V	5 A
thermal current of the switching element with contacts maximum	5 A
electrical endurance (operating cycles) typical	100 000
mechanical service life (operating cycles) typical	10 000 000
design of the fuse link for short-circuit protection of the NO contacts of the relay outputs required	gL/gG: 6 A, or quick: 10 A
DC resistance of the cable maximum	30 Ω
wire length between sensor and electronics evaluation device with Cu 1.5 mm² and 150 nF/km maximum	1 000 m
Times	
make time with automatic start	
• at DC maximum	80 ms
backslide delay time in the event of power failure	
• maximum	100 ms
recovery time after power failure typical	1 s
pulse duration	
• of the sensor input minimum	25 ms
• of the ON pushbutton input minimum	0.025 s
Control circuit/ Control	
type of voltage of the control supply voltage	DC
control supply voltage 1	
• at DC rated value	24 V
operating range factor control supply voltage rated value of magnet coil	
• at AC	
— at 50 Hz	0.85 ... 1.1
— at 60 Hz	0.85 ... 1.1
• at DC	0.85 ... 1.1

Installation/ mounting/ dimensions		
mounting position	any	
fastening method	screw and snap-on mounting	
width	45 mm	
height	138.5 mm	
depth	120 mm	
Connections/ Terminals		
type of electrical connection	spring-loaded terminals	
type of connectable conductor cross-sections	<div><div><div>• solid</div><div>2x (0.25 ... 1.5 mm²)</div></div><div><div>• finely stranded</div><div><div>— with core end processing</div><div>2 x (0.25 ... 1.5 mm²)</div></div><div><div>— without core end processing</div><div>2x (0.25 ... 1.5 mm²)</div></div></div></div>	
type of connectable conductor cross-sections for AWG cables	<div><div><div>• solid</div><div>2x (24 ... 16)</div></div><div><div>• stranded</div><div>2x (24 ... 16)</div></div></div>	
Product Function		
product function	<div><div><div>• light barrier monitoring</div><div>No</div></div><div><div>• standstill monitoring</div><div>No</div></div><div><div>• protective door monitoring</div><div>Yes</div></div><div><div>• automatic start</div><div>Yes</div></div><div><div>• magnetically operated switch monitoring NC-NO</div><div>No</div></div><div><div>• rotation speed monitoring</div><div>No</div></div><div><div>• laser scanner monitoring</div><div>No</div></div><div><div>• monitored start-up</div><div>No</div></div><div><div>• light array monitoring</div><div>No</div></div><div><div>• magnetically operated switch monitoring NC-NC</div><div>No</div></div><div><div>• EMERGENCY OFF function</div><div>No</div></div><div><div>• pressure-sensitive mat monitoring</div><div>Yes</div></div></div>	
suitability for interaction press control	No	
suitability for use	<div><div><div>• monitoring of floating sensors</div><div>Yes</div></div><div><div>• monitoring of non-floating sensors</div><div>No</div></div><div><div>• safety switch</div><div>Yes</div></div><div><div>• position switch monitoring</div><div>Yes</div></div><div><div>• EMERGENCY-OFF circuit monitoring</div><div>No</div></div><div><div>• valve monitoring</div><div>No</div></div><div><div>• tactile sensor monitoring</div><div>No</div></div><div><div>• magnetically operated switch monitoring</div><div>No</div></div><div><div>• safety-related circuits</div><div>Yes</div></div></div>	
Certificates/ approvals		
certificate of suitability	BG, SUVA, UL, CSA, EN 60204-1, EN ISO 12100, EN 954-1, IEC 61508	
<div><div>• TÜV (German technical inspectorate) certificate</div><div>Yes</div></div>		
<div><div>• UL approval</div><div>Yes</div></div>		
<div><div>• BG BIA approval</div><div>Yes</div></div>		
General Product Approval		EMC
		Functional Safety/Safety of Machinery



[Type Examination Certificate](#)

Test Certificates	other
-------------------	-------

[Special Test Certificate](#)

[Confirmation](#)

Further information

Siemens has decided to exit the Russian market (see here).

<https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business>

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3TK2828-2BB41>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3TK2828-2BB41>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3TK2828-2BB41>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3TK2828-2BB41&lang=en

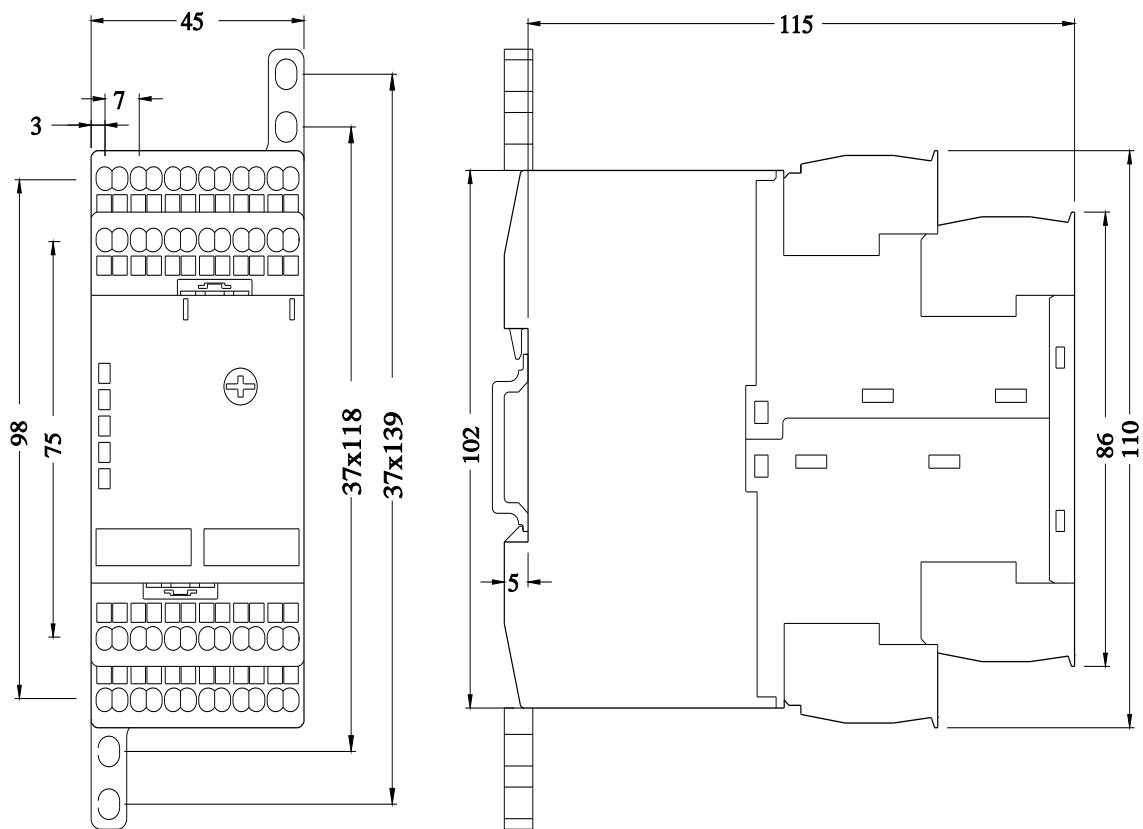

last modified:

7/6/2022